

	MISSING SYMBOLS
	NO MISSING SYMBOL NUMBER

STAMP "PXX" ON UNDERSIDE IN THIS AREA WITH 0.8 HIGH CHARACTERS PER NOTE #12. CHARACTERS MUST BE POSITIONED IN DIRECTION SHOWN, OR AT 180° TO DIRECTION SHOWN.

2X 0.9 ±0.15

2X 0.85 ±0.15

4X 0.3 ±0.15

4X R

E

P


(3.3)

1.5 ±0.3


STAMP PART I.D. NO. ON UNDERSIDE IN THIS AREA WITH 0.8 HIGH CHARACTERS SHOWN IN CHAR. CHARACTERS MUST BE POSITIONED PERPENDICULAR TO CENTRELINE.

STAMPED KNURL PATTERN.

WING CONST.




BLANK TYPE 102
SAME AS TYPE 101 EXCEPT
AS SHOWN



WING CONST. 11

1. UNLESS OTHERWISE SPECIFIED TWO (2) OR INDICATED DIMENSIONS ARE TO FACE OF VIEW SHOWN AND AUTOMATICALLY DIMENSIONED TO CENTERLINE OF SECTION. USE MATH MODEL FOR PRECISION DIMENSIONS, FOR ALL DIMENSIONS WHERE NO MATH MODEL IS SPECIFIED, USE THE BUILD, USE MATH MODEL FOR PRECISION TOOL PATH DATA. ALL UNITS ARE IN INCHES.
2. R 0.4 MAX PERMISSIBLE ON ALL "SHARP" CORNERS. ALL LOCKING FEATURES MUST HAVE "SHARP" CORNERS.
3. "HXX" INDICATES "X" RADIUS LAST TWO DIGITS OF NAME DIE SERIES NUMBER (POL, POZ, POS, ETC.).
4. * DENOTES DIMENSION MADE AT CUT-OUT AND CRIMP DIE.
5. MINIMUM PERFORMER CAPABILITY IS 24 AMPs.
6. TERMINAL CHARACTERIZATION: TERMINAL CHARACTERIZATION TO ENHANCE MATED TO 0.001 THICK X 4.8 WIDE DIE STEEL BLADE.
7. *A: INDICATES MATING PIN TOLERANCE OVER CORP. PLATE.
8. RECOMMENDED MATING BLADE: WIDTH 4.8 ± 0.1
LENGTH 1.0 ± 0.025
LENGTH 7.0 ± 0.1

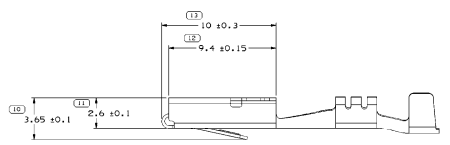[illegible][illegible]