

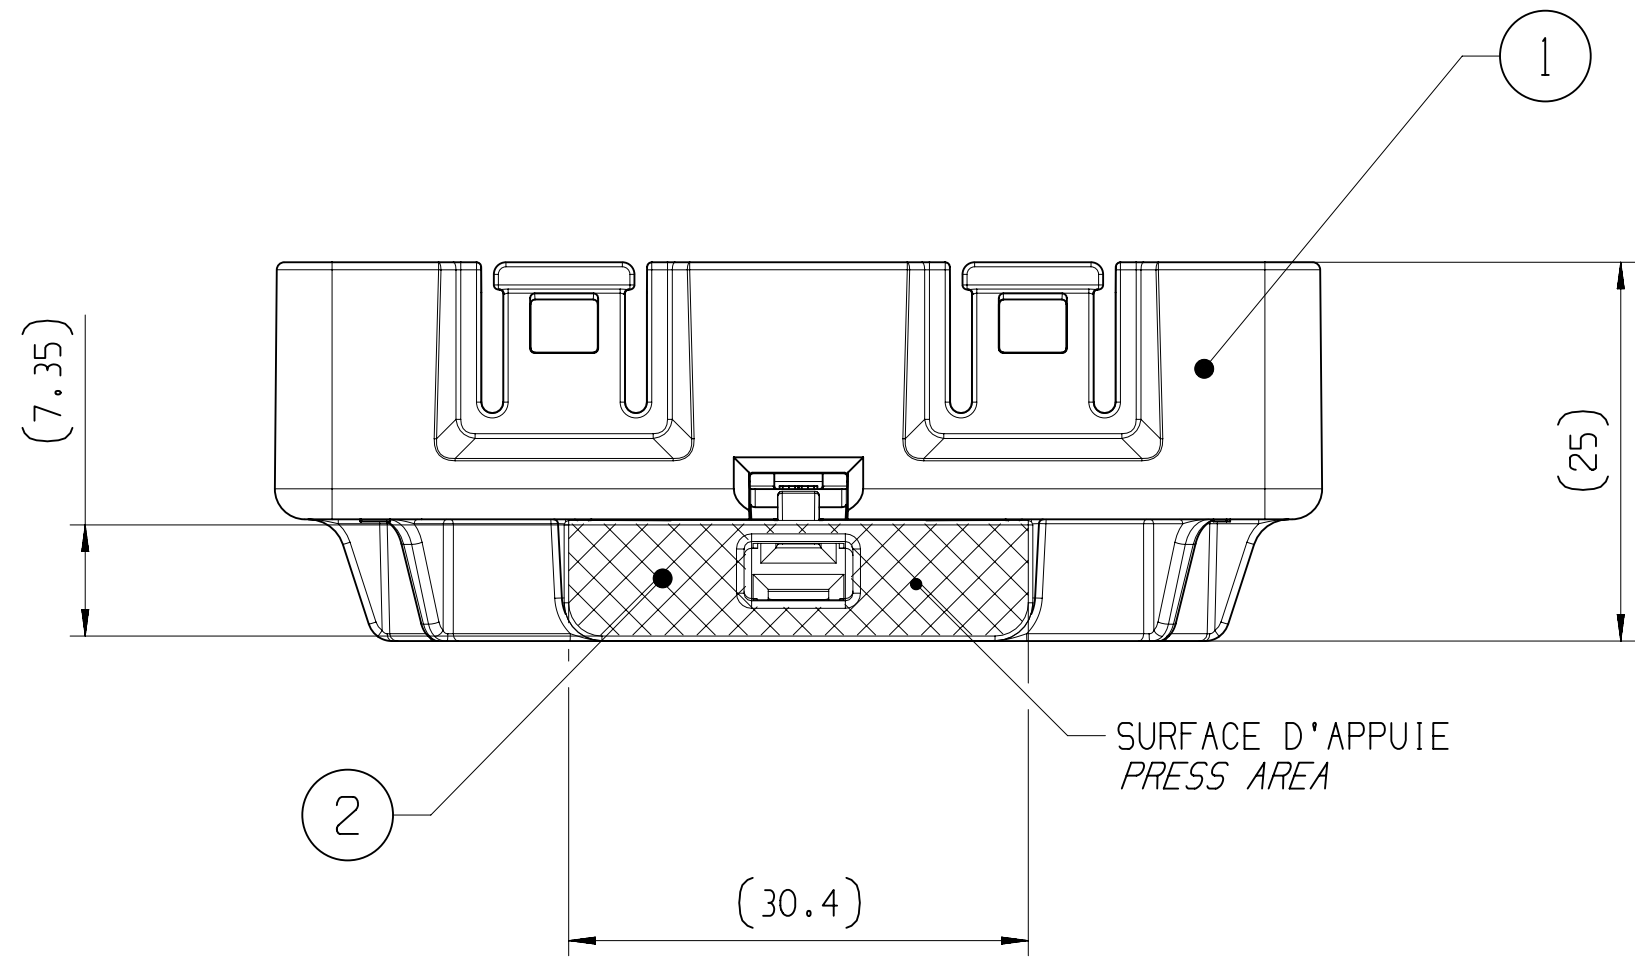
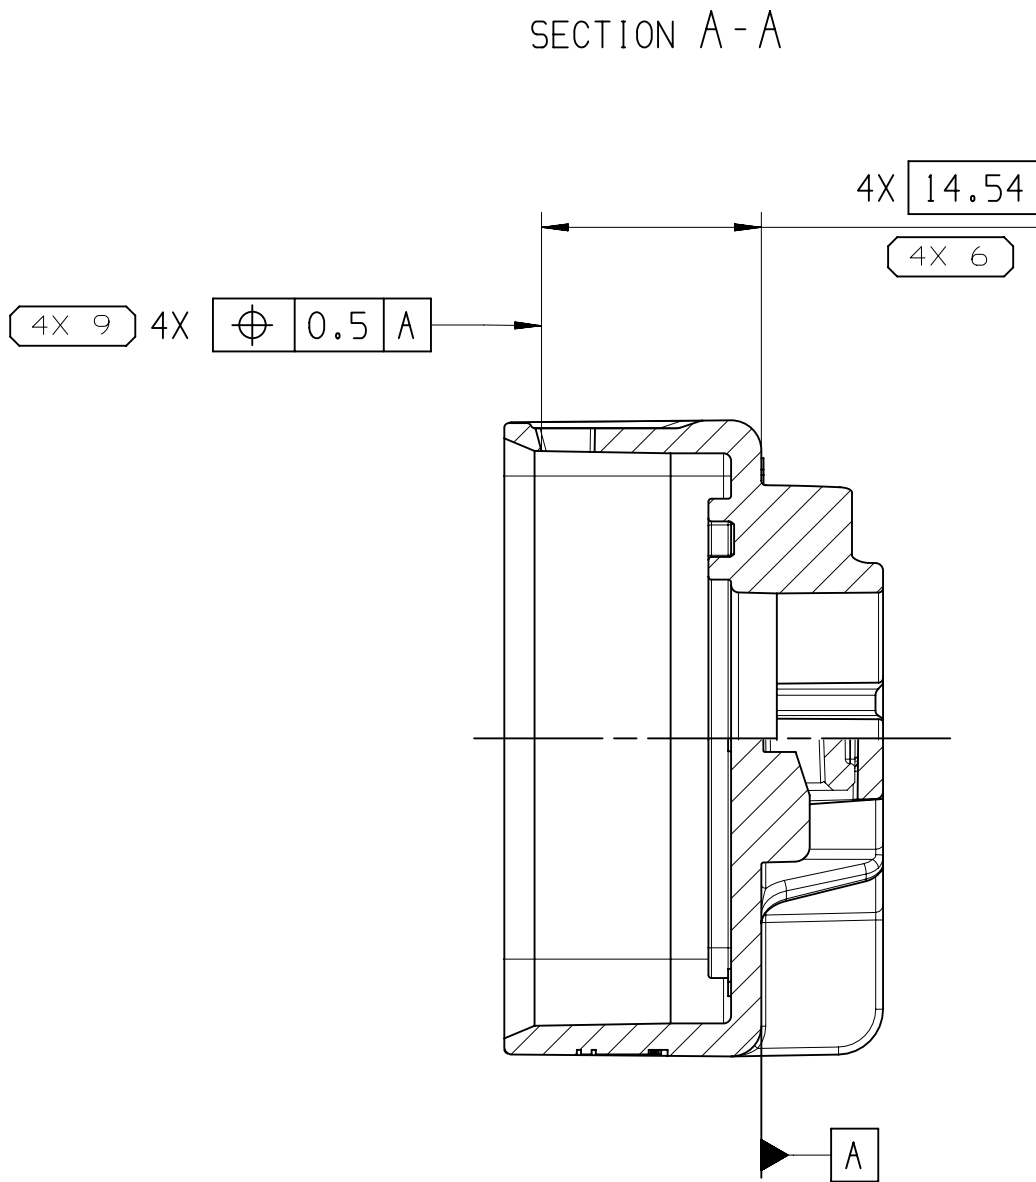


ASSOCIATED PARTS			
N°	DESIGNATION	CODING	APTIV PN
1	PLUG RCS 890 SW GEN-2	CODE 1	35464221

DWG STATUS					ZONE		REVISION HISTORY			AUTH	DR	APVD 1	APVD 2
DATE	STG	REV	N/P	CHG									
03DE25	R	01	-	-	-		INITIAL RELEASE				M.GOP	S.LAC	T.LEC

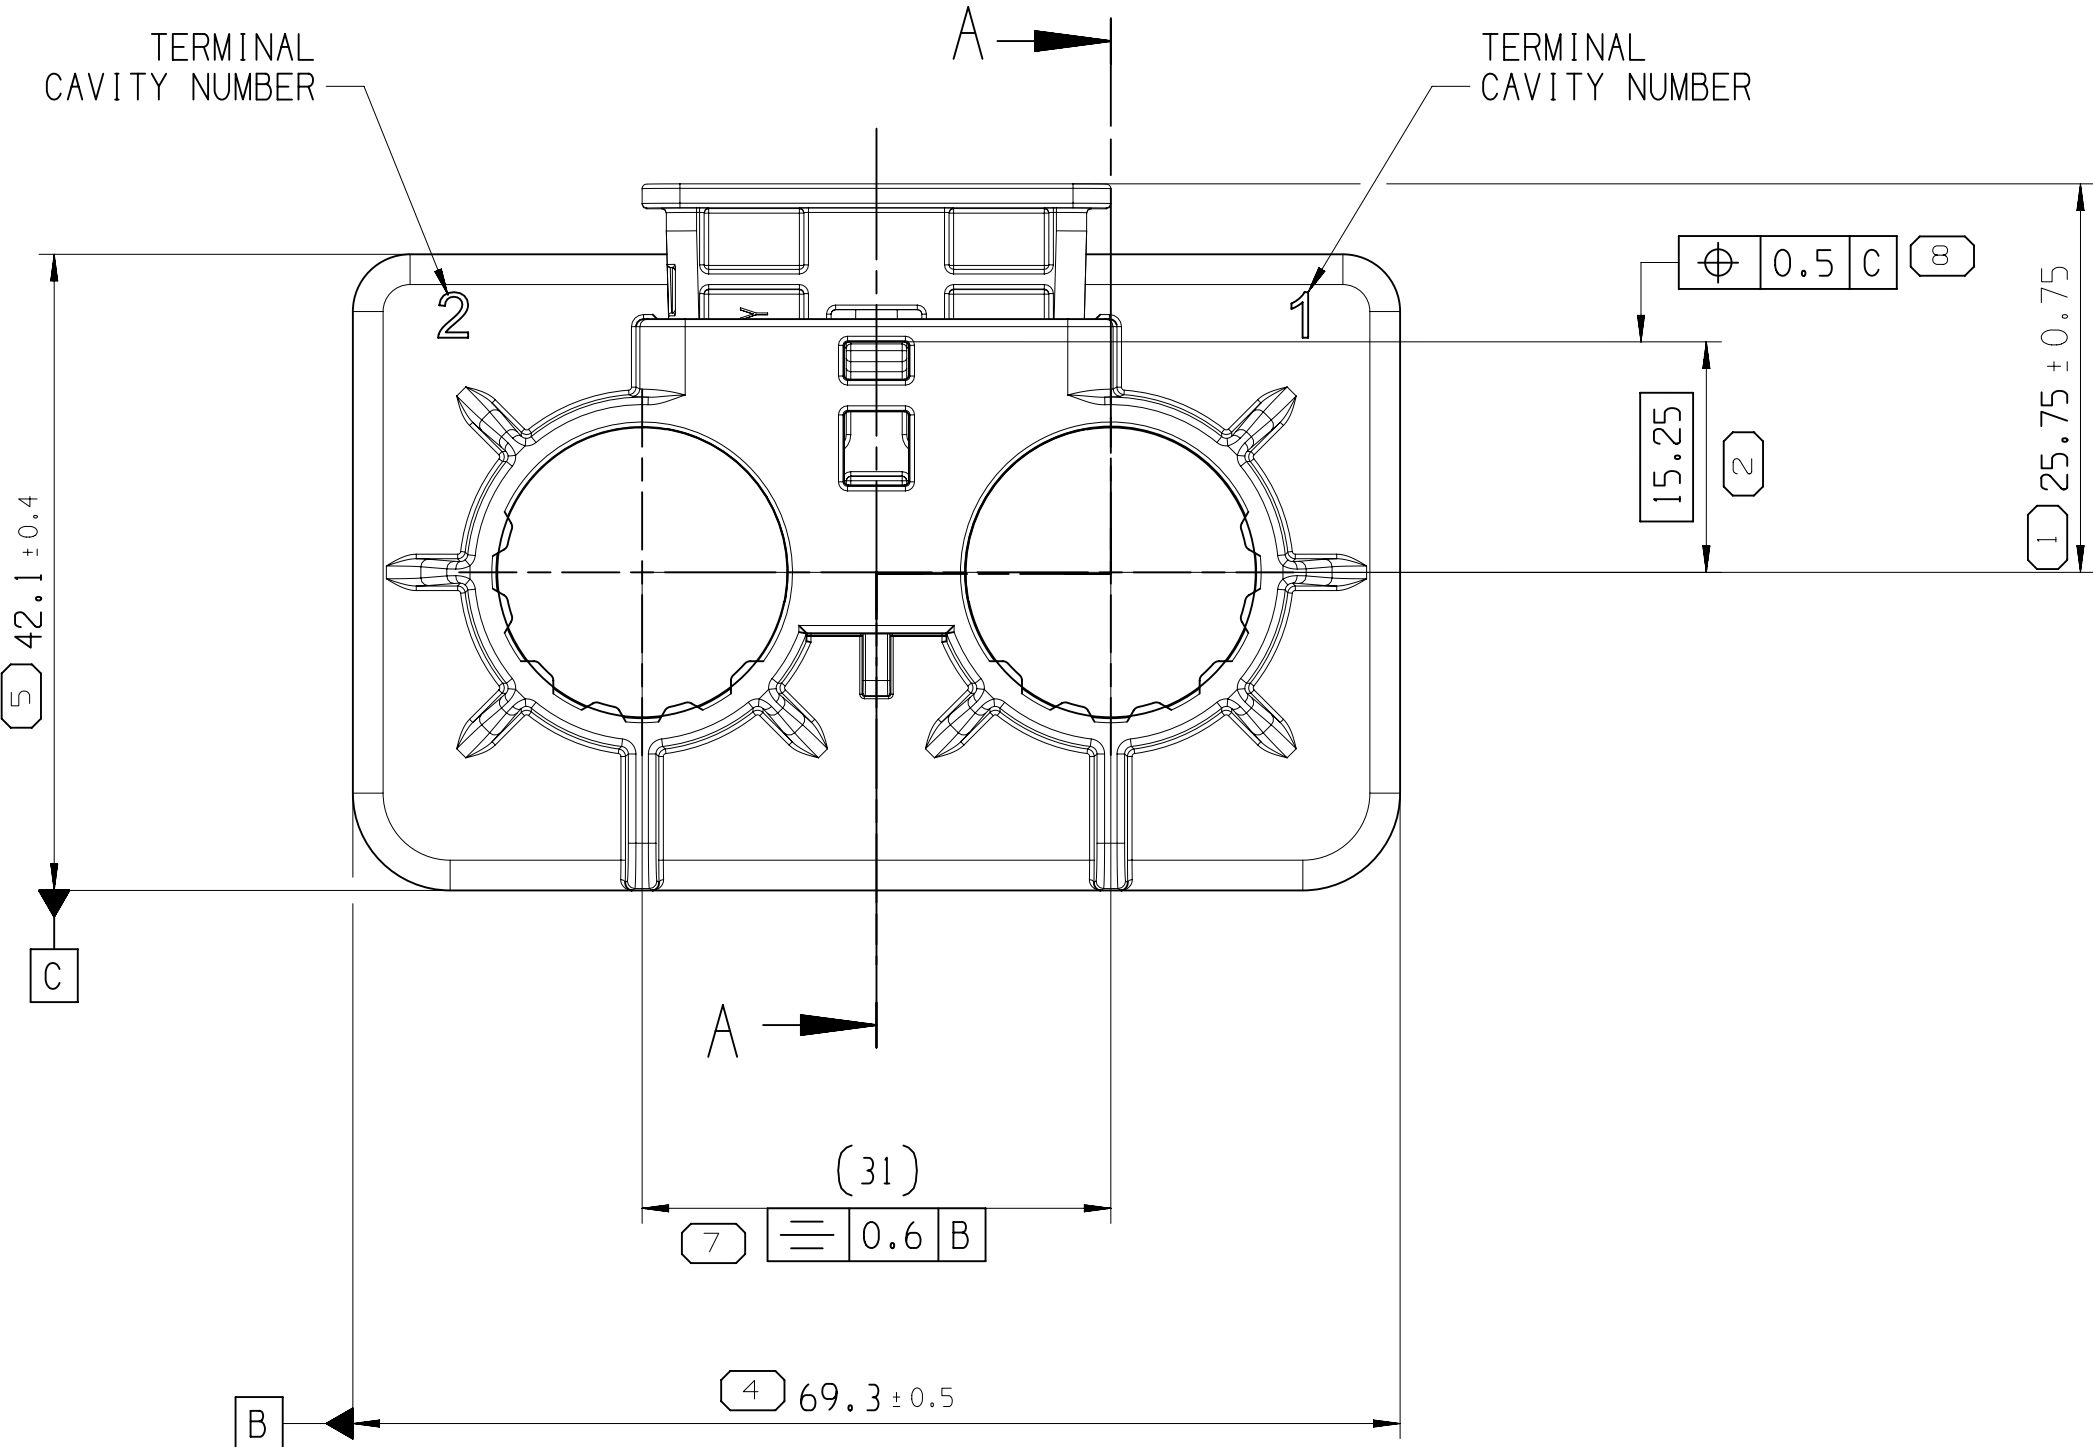

3D VIEW
SCALE 1:1

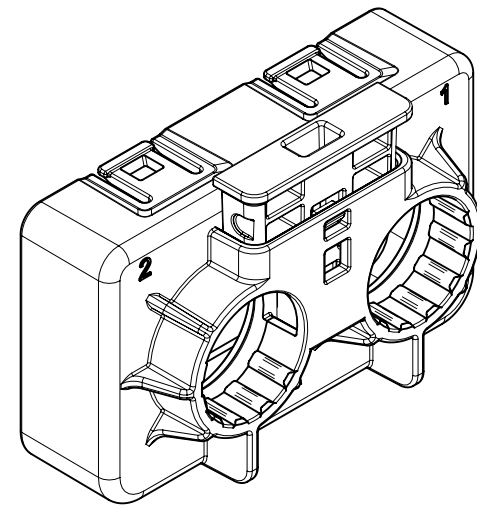

DWG TYP		DISTR CODE
CUSTOMER PART DRAWING		
WEIGHT (GR)	SEE TABLE	
VOLUME (CM³)	---	
ROUTING		

UNLESS OTHERWISE SPECIFIED

GENERAL TOLERANCES
ACCORDING TO:
SEE CHART

GD&T
ACCORDING TO:
ISO 1101

REFERENCE
PE461297-CUS01

FIRST ANGLE PROJECTION

DO NOT
SCALE
USE MATH
DATA

• APTIV •

CONNECTION SYSTEMS
Chennai, India

COPYRIGHT 2025 APTIV. ALL RIGHTS RESERVED.
THIS DRAWING IS THE PROPERTY OF APTIV AND CONTAINS APTIV
CONFIDENTIAL INFORMATION. THE REPRODUCTION, DISTRIBUTION AND
UTILIZATION OF THIS DOCUMENT OR ITS RELATED CAD MATH DATA, AS WELL
AS COMMUNICATION OF ANY CONTENT TO OTHERS, WITHOUT EXPRESS
AUTHORIZATION, IS PROHIBITED.

CE PLAN EST LE PROPRIETE DE APTIV ET CONTIENT DES
INFORMATIONS APTIV CONFIDENTIELLES. LA REPRODUCTION, LA DISTRIBUTION
ET UTILISATION DE CE DOCUMENT OU DE SES DONNEES MATHÉMATIQUES CAO,
AINSI QUE LA COMMUNICATION DE TOUT CONTENU À AUTRUI, SANS AUTORISATION
EXPRESSE EST INTERDITE.

DR	M.GOPIKRISHNAN	DATE
APVD1	S.LACOTE	03DE25
APVD2	T.LECOMTE	03DE25
APVD3		
APVD4		
APVD5		

SUBSTANCES OF CONCERN AND RECYCLED CONTENT PER APTIV 10949001
MATIERES PROSCRITES ET CONTENU RECYCLABLE SELON
APTIV 10949001

MATERIAL
SEE TABLE

DRAWING NAME
STRAIN RELIEF DEVICE
2W RCS890 SW GEN-2

DRAWING NUMBER			
36056712			
SIZE	SCALE	FRAME NO	SHEET NO
A1	2:1	1 OF 1	1 OF 1
STG	REV	N/P	
R	01	-	

WIRE SECTION						SECTION VIEW
N°	DESCRIPTION	PART N°	50mm²	70mm²	MATERIAL	
1	STRAIN RELIEF DEVICE ASSEMBLY	APTIV PN	35850207	35464231	-	
		REVISION	01	01		
		WEIGHT (g)	25.7	25.3		
		LENGTH (L1) ± 0.25	6.5	4.6		
2	LOCK	APTIV PN	35464235		PA6 GF30	
		COLOR	BROWN	GREY		
		SIZE (D1) ± 0.5	15.9	18.2		
		LENGTH (L1) ± 0.25	6.5	4.6		

DIM TO CHECK COTES A VERIFIER		DIMENSIONAL RANGE (MM)												CHART	
FROM	TO	> 0	> 20	> 30	> 70	> 100	> 150	> 200	> 250	> 300	> 400				
		±0.15	±0.2	±0.3	±0.4	±0.5	±0.6	±0.8	±1	±1.2					
TOLERANCE UNLESS OTHERWISE SPECIFIED															
ANGULAR TOLERANCE ±2°															

