



RECOMMENDED
BASE METAL - CDA-210, GILDING, EXTRA SPRING TEMPER
PLATING - 0.0050 TO 0.0025 MM THK TIN

MINIMUMS
ELECTRICAL CONDUCTIVITY - > 20% IACS AT 20°C. USE OF A
MATERIAL WITH CONDUCTIVITY < 20% IACS MUST BE APPROVED BY
PLATE ELECTRIC MATERIALS ENGINEERS.



TENSILE STRENGTH - 407 MPa

PLATING
ENVIRONMENT - LOW ENERGY (1-2 V) AND NON-PASSIVATED
ENVIRONMENT POWER CIRCUITS (0.0050 TO 0.0025 MM
THICK TIN, FOR MATERIALS CONTAINING 10% OR MORE
ZINC, THE SURFACE OF COPPER 0.0050 TO 0.0025 MM
THICK IS REQUIRED).

BLADE THICKNESS
UNPLATED - 0.813 TO 0.625
TIN PLATED - 0.813 TO 0.630

MATING BLADE INFORMATION

SCALE 9:1


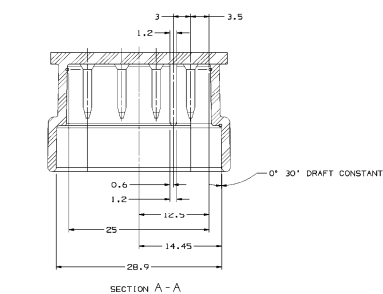


NOTES:

1. UNLESS OTHERWISE SPECIFIED AND/OR INDICATED:
DIMENSIONS ARE TO FACE OF VIEW SHOWN AND
AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION.
(SEE MATH MODEL FOR PRECISE DIMENSION)
FOR ALL DIMENSIONS NOT SHOWN BUT REQUIRED FOR
TOOL BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA.
ALL RADII 0.4
DRAFT IS 1" ON ALL OUTSIDE SURFACES


MATING CONNECTOR INFORMATION

WHEN USING THIS INFORMATION FOR A NEW DESIGN, REQUEST THE LATEST COPY OF THIS PRINT FROM PACKARD ELECTRIC DIVISION

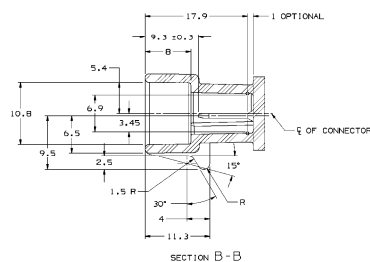


7		6		5	
SYMBOL DEFINITION					
A DIMENSION WITHOUT AN INSPECTION REPORT SYMBOL ○ DOES NOT REQUIRE INSPECTION. IT MAY BE CONTROLLED ON THE INDIVIDUAL COMPONENT DRAWING.				TOTAL NO OF INSPECTIONS REQUIRED	
				LAST NO. USED	



	MISSING SYMBOLS
1	NO MISSING SYMBOL NUMBER
1	

[illegible]

TYPE 202
SAME AS TYPE 201
EXCEPT AS SHOWN



TYPE 201



NOTES:

1. UNLESS OTHERWISE SPECIFIED AND/OR INDICATED:
DIMENSIONS ARE TO FACE OF VIEW SHOWN AND
AUTOMATICALLY ROUNDED TO THE NEAREST INSPECTION,
[SEE MAT. MODEL FOR PRECISE DIMENSIONS]
FOR ALL OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR
TOOL BUILD, SEE MAT. MODEL FOR PRECISE TOOL PATH DATA.
2. SEALING CODE 3.
3. WHEN PARTS ARE SHIPPED, THEY MUST BE PACKED IN PLASTIC BAGS
SHIPPING CONTAINERS MUST BE LINED WITH PLASTIC LINERS.
BAGS FOR LINERS MUST BE SEALED TO AVOID ENTRY OF FOREIGN
MATERIAL.
4. DIMENSIONS MARKED "REF" ARE FOR REFERENCE ONLY
AND NO TOLERANCE LIMITS ARE ESTO BE ENFORCED.
5. FOR PART NUMBER WITH ADHESIVE, USE MP100001 OR ADHESIVE
APPROVED BY MATERIALS ENGINEERING TO GLUE CONNECTOR SEAL
TO CONNECTOR.
6. FOR APPLICATION DATA SEE THE INDIVIDUAL APPLICATION MANUALS.

13954315	01	AA	15305338 12191366	B3 B5	- 201	15305337 12191365	12047949 12047949	BRN LT GRAY	A AND D NONE	
PART NO WITH ADHESIVE	REV	N/P	PART NO WITHOUT ADHESIVE	REV	N/P	TYPE	CONNECTOR	SEAL	COLOR	BLOCKED CAVITIES

[illegible][illegible]

DELPHI				
DELPHI PARTS ELECTRICAL/ELECTRONIC ASSEMBLIES				
AVENUE 30				
COMPANY (ON DELPHI COMPUTER) ENTER ITS ABBREVIATION				
NAME OF THE COMPANY				
THIS NUMBER IS THE PROPERTY OF DELPHI CORPORATION. IT MUST BE REPRODUCED ON ALL INVOICES AND ALL OTHER DOCUMENTS OF THIS COMPANY OR TO DELPHI OR ON WHICH DELPHI HAS ANY INTEREST OR WHICH MAY BE USED BY DELPHI OR IN WHICH DELPHI HAS ANY INTEREST WITHOUT EXPRESS PERMISSION IS PROHIBITED.				
DATE				
OFF				
APRIL 18, 1978	130695			
APRIL 18, 1978	130695			
APRIL 18, 1978	130695			
APRIL 18, 1978	230695			
APRIL 18, 1978				
(NUMBER(S) OF COMPANY AND PRODUCT) (DATE, TIME, SOURCE, ADDRESS)				
DELPHI USE ONLY				
SEE CHART				
ORDERING NAME TAXI ASM CORP F M/P 150 SLD				
ORDERING NUMBER 12092575				
DATE	PRICE	QUANTITY	UNIT	AMOUNT
APR 18 1978	1.00	1	EA	1.00