

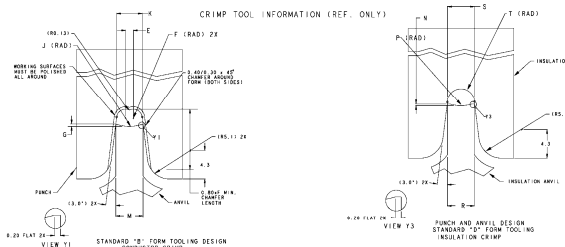


SUPPLIER P/N 11A	SUPPLIER P/N GOLD	SHIP CODE	WIRE SIZE	CONDUCTOR CH (SECT 2-2, +7-0.5)	CONDUCTOR CW (SECT 2-2, +7-0.10)	INSULATION CH (SECT 1-1, +7-0.5)	INSULATION CW (SECT 1-1, +7-0.10)
54001625	54001627	15	18	2.05	2.05	2.45	2.40
			18	1.15	2.05	2.15	2.40
54032058	54032062	20	22	4.00	4.00	4.00	4.00
			22	4.00	4.00	4.00	4.00




WIRE SPECIFICATION	F=1-0.005	F=1-0.005	F=1-0.005	F=1-0.005	F=1-0.005	F=1-0.005	F=1-0.005	F=1-0.005	F=1-0.005
20 [50-WIL-123-A/ MS-0200	0.14	0.43	0.49	2.06	1.59	3.15	2.15	2.33	2.33
16 [50-WIL-123-A/ MS-0200	0.72	0.53	0.13	2.26	1.99	1.97	2.34	2.52	2.53

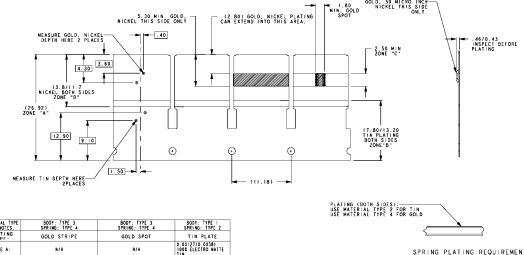

MATERIAL TYPE SPEC. TYPE 1	SOPK: TYPE 3	SOPK: TYPE 3	SOPK: TYPE 2
P-ATING	GOLD STRIPE	GOLD SPOT	TIN PLATE
JUNE A:	N/A		9.0012719 0030H ELECTRO WATTS
JUNE B:	8.0012719 0030H GOLD ELECTRO WATTE	9.0012719 0030H GOLD ELECTRO WATTE	N/A
JUNE C:	9.0012719 0030H GOLD ELECTRO WATTE CLASS C OVER NICKEL	9.0012719 0030H GOLD ELECTRO WATTE CLASS C OVER NICKEL	N/A
JUNE D:	9.0012719 0030H GOLD ELECTRO WATTE CLASS C OVER NICKEL	9.0012719 0030H GOLD ELECTRO WATTE CLASS C OVER NICKEL	N/A

PLATING OPTIONS:

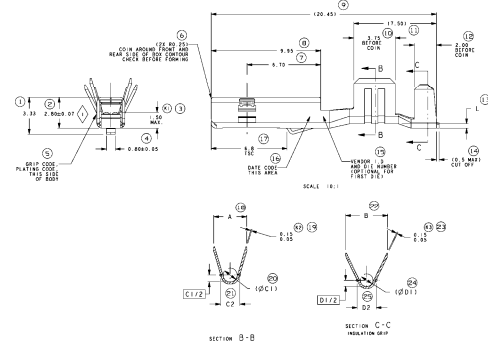

PART NUMBER TIN PLATED	DRIP PLATING CONC. TIN	PART NUMBER GOLD STRIPE, SPOT	DRIP PLATING CONC. GOLD	WIRE SPECIFICATION	A	B	SEC. 1	C2	SD1	92	L
54102600	20	54002602	2005	ESD-WIL123-AF MS-8288	2.5	3.1	0.78	1.4	1.40	2.3	0.41
54101825	18	54001827	1805	ESD-WIL123-AF MS-8288	3.0	3.7	1.00	1.6	1.75	2.4	0.46

- [illegible]

[illegible]

NOTES

1. UNLESS OTHERWISE SPECIFIED AND/OR INDICATED:

DIMENSIONS ARE TO FACE OF VIEW SHOWN AND
MATHOMATICALLY ROUNDED BY COMPUTER FOR PRECISION
(SEE MATH MODEL FOR PRECISE DIMENSIONS). FOR ALL
OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL
BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA.

[illegible]

TOLERANCE UNLESS
OTHERWISE SPECIFIED:
DECIMALS ANGLES
TWO PLACE SEE DRAWING
THREE PLACE SEE DRAWING

[illegible][illegible]