
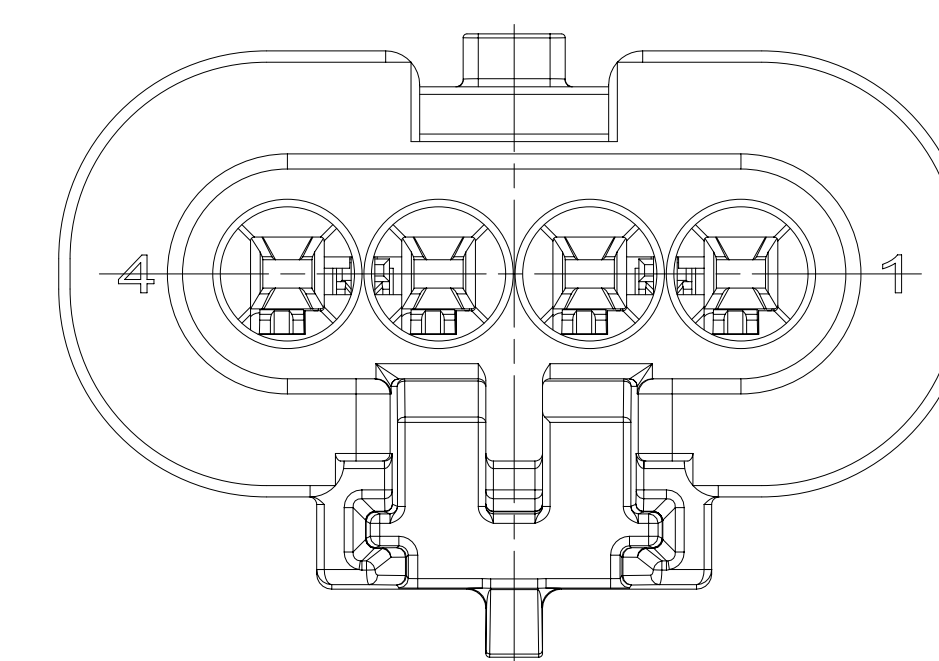
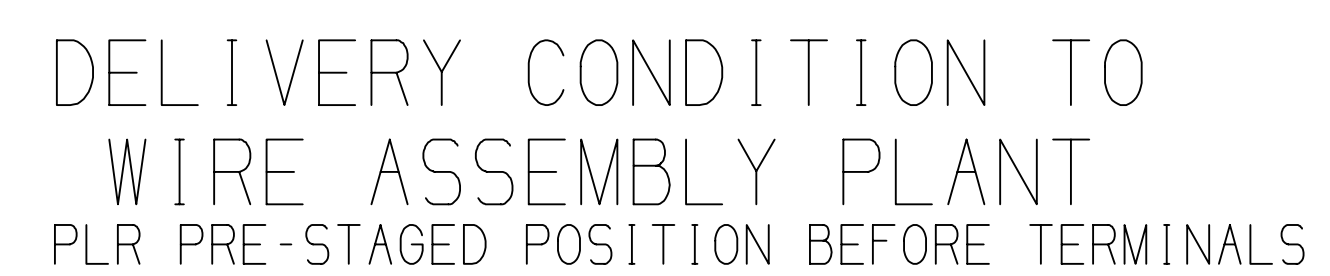
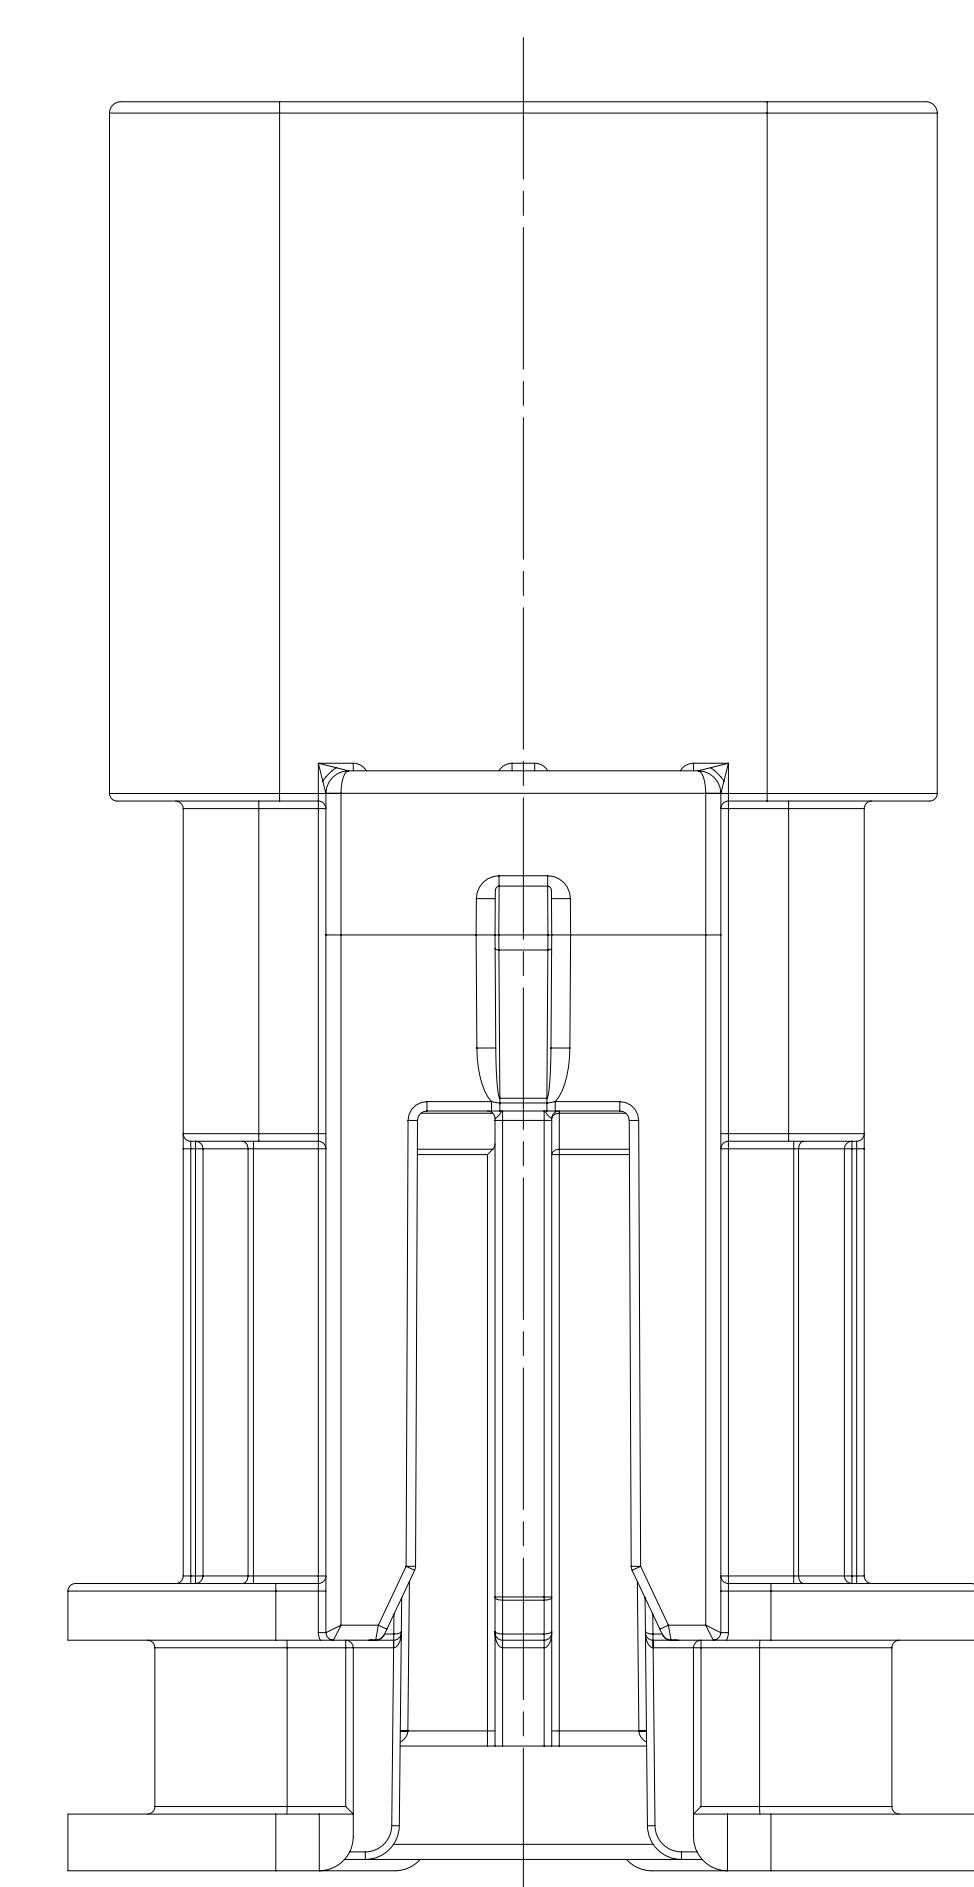


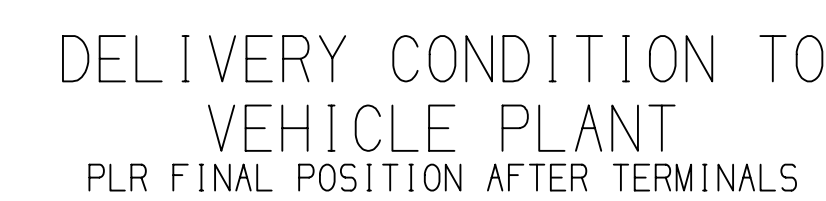

NOTES

1. UNLESS OTHERWISE SPECIFIED AND/OR INDICATED
DIMENSIONS ARE TO FACE OF VIEW SHOWN AND
AUTOMATICALLY ROUNDED BY COMPUTER FOR IN'S
(USE MATH MODEL FOR PRECISE DIMENSIONS).
OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR
BUILD, USE MATH MODEL FOR PRECISE TOOL PA
2. CONNECTOR CONFORMS TO USCAR EWCAP DRAWING I
3. FOR APPLICATION DATA SEE THE INDIVIDUAL APP
4. PLR PRESTAGE TO REMOVAL FORCE LOW MINIMUM.
5. ALTERNATE CONSTRUCTION ONLY FOR PARTS FROM
IDENTIFIED BY TOOL CAVITY ID "IA".

[illegible]

351360275	01	-	102	B	35130279	35147455
351178007	01	-	101	A	35117804	35147455
351193924	01	AB	108	H	351197966	35147455
351193923	01	AB	107	G	351197965	35147455
351193922	01	AB	106	F	351197964	35147455
351193921	01	AB	105	E	351197963	35147455
351193920	01	AB	104	D	351197962	35147455
351197969	01	AB	103	C	351197961	35147455
351197968	01	AB	102	B	351197960	35147455
35147457	01	AC	101	A	35147453	35147455
PART NO	REV	N/P	TYPE	USCAR INDEX KEY	CONNECTOR	PLR

		(16) PROCESS SENSITIVE DIMENSION	
		DIMENSIONS ENCLOSED IN [] INDICATE REFERENCE DIMENSIONS AND NO TOLERANCE LIMITS ARE ESTABLISHED	
DIMENSIONAL REFERENCE (MM)			
FROM TO	> 0 20	> 20 30	> 30 70
	> 70 100	> 100 150	> 150 200
	> 200 250	> 250 300	> 300 400
TOLERANCE UNLESS OTHERWISE SPECIFIED			
	+0,15 +0,2	+0,3 +0,4	+0,5 +0,6
	+0,8 +1	+1 +1,2	+1,2 +1,6
ANGULAR TOLERANCE $\pm 2^\circ$			