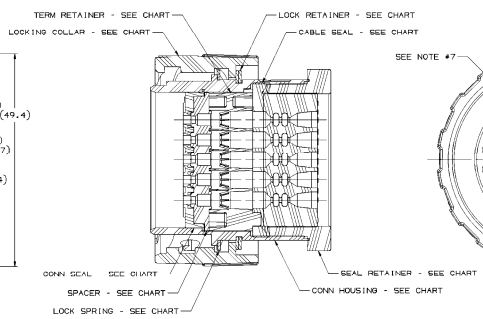
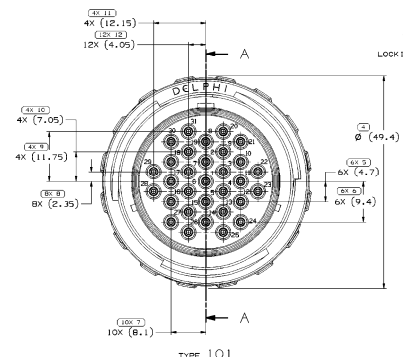


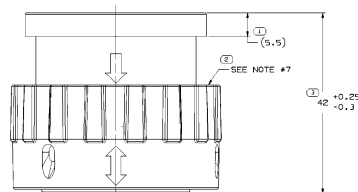
[illegible]

1554-4346	01	AB	02	19	1554-3559	13679113	13674575	13667191	1554-3613	1554-3618	13668478	1371-7280	1371-7279	N/A	2.25 - 3	2.94 - 3	1554-3511
1554-4345	01	AB	02	19	1554-3559	13679113	13674575	1371-1124	1554-3613	1554-3670	13668478	1371-7280	1371-7279	N/A	1.3 - 2.85	2.45 - 3.6	1554-4350
1554-4344	01	AB	01	31	1554-3569	13657002	13657006	13657007	1554-3574	1554-3570	13668478	1371-7280	1371-7279	N/A	2.25 - 3	N/A	1554-4349
1554-4343	01	AB	101	31	1554-3569	13657002	13667006	1371-1120	1554-3574	1554-3570	13668478	1371-7280	1371-7279	N/A	1.3 - 2.85	N/A	1554-4348

PART NO	REV	IN/P	TYPE	TOTAL QUANTITIES	CONN HOUSING	TERMIN RETAINER	SPACER	CONN SEAL	CABLE SEAL	SEAL RETAINER	LOOKING COLLAR	LOCK RETAINER	LOCK SPRING	SIZE 20 (1.0)	SIZE 16 (1.0)	SIZE 12 (2.4)	WATING PART NUMBER
---------	-----	------	------	---------------------	-----------------	--------------------	--------	--------------	---------------	------------------	-------------------	------------------	----------------	------------------	------------------	------------------	--------------------

1. UNLESS OTHERWISE SPECIFIED AND/OR INDICATED:
DIMENSIONS ARE TO FACE OF VIEW SHOWN AND
AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION
USE WITH MODEL PART. MINOR DIMENSIONS NOT SHOWN BUT
OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL
BUILD, SEE MATR. MODEL FOR PRECISE TOOL PATH DATA.

2. THIS PRODUCT IS NOT CATEGORIZED AS APPLICABLE ITEM, MINOR
IMPERFECTIONS INCLUDING, BUT NOT LIMITED TO: FLOW MARKS, COLOR
BANDING, DATA NOT SHOWN IN LOGIC AND DATA DO NOT AFFECT
FIT, FORM, OR FUNCTION OF THE PART ARE PERMISSIBLE PER DNP-4.7-CS-01.

3. THIS PART IS NOT CONTROLLED FOR AUTOMATIC FEEDING.

4. CAPABILITY TO ACCEPT THE FOLLOWING TERMINALS OR EQUIVALENT:
HES J-6 - 13663715
HES 2-4 - 1778326

5. FOR APPLICATION DATA SEE THE INDIVIDUAL APPLICATION DRAWINGS,
SEAL RETAINER PLUG RETENTION FORCE MUST EXCEED 800N.

6. DELPHI ASSEMBLY PART NUMBER, AND JULIAN DATE OF MANUFACTURE
TO BE LASER ETCHED ON COLLAR SURFACE SHOWN, CHARACTER
HEIGHT TO BE .25MM MINIMUM.

7. SHIPPING CAP 1975446 OR EQUIVALENT CAN BE ADDED AFTER
STRESS BUILD TO PROTECT AGAINST CONTAMINATION.

[illegible]