


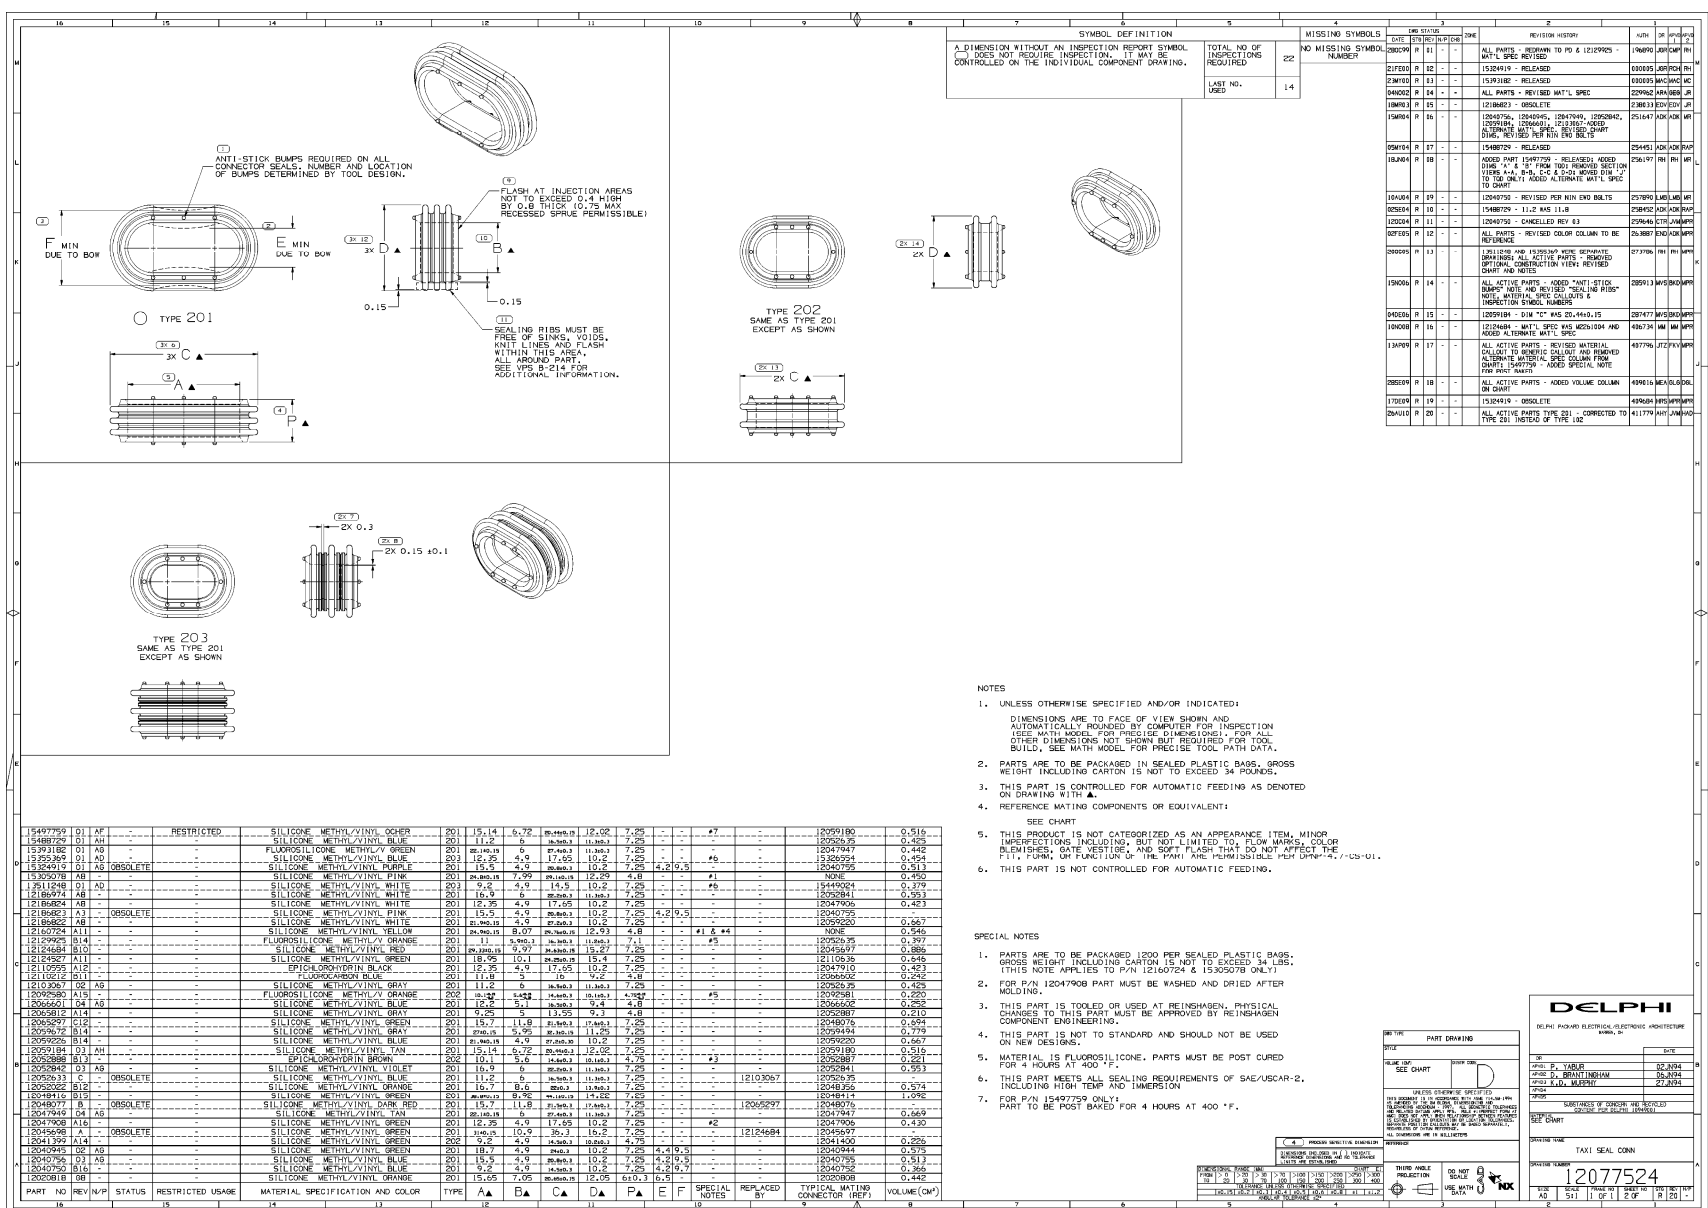

NOTES

1. UNLESS OTHERWISE SPECIFIED AND/OR INDICATED:
 - 1.1 DIMENSIONS ARE TO FACE UNLESS OTHERWISE SPECIFIED.
 - 1.2 DIMENSIONS ARE TO BE OBTAINED BY COMPUTER FOR INSPECTION USE WITHIN 48 HOURS OF THE DATE OF THE INSPECTION.
 - 1.3 ALL DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL BUILD, SEE MATING PARTS FOR PRECEDENCE.
2. PARTS ARE TO BE PACKAGED IN SEALED PLASTIC BAGS, GROUP HEIGHT INCLUDING CARTON IS NOT TO EXCEED 30 POUNDS.
3. THIS PART IS CONTROLLED FOR AUTOMATIC FEEDING AS DENOTED ON DRAWING WITH ▲.
4. REFERENCE MATING COMPONENTS OR EQUIVALENT:
 - 4.1 SEE CHART
5. THIS PRODUCT IS NOT CATEGORIZED AS AN APPEARANCE ITEM, MINOR DEFECTS SUCH AS DENTING, SCRATCHES, AND SOFT SPOTS THAT DO NOT AFFECT COLOR BLENDING ARE NOT CAUSE FOR REJECTION. (SEE DPM 47-22-01)
6. THIS PART IS NOT CONTROLLED FOR AUTOMATIC FEEDING.

SPECIAL NOTE

1. PARTS ARE TO BE PACKAGED 1200 PSI SEAL PLASTIC BAGS, GROSS WEIGHT INCLUDING CARTON IS NOT TO EXCEED 34 LBS. THIS NOTE APPLIES TO PARTS IN 1200 PSI BAGS.
2. FOR P/N 12047908 PART MUST BE WASHED AND DRIED AFTER MOLDING.
3. THIS PART IS TOOLED OR USED AT REINHEIMEN, PHYSICAL CHANGES TO THIS PART MUST BE APPROVED BY REINHEIMEN COMPONENT AND ENGINEERING.
4. THIS PART IS NOT TO STANDARD AND SHOULD NOT BE USED ON NEW DESIGNS.
5. MATERIAL IS FLUOROSILICONE, PARTS MUST BE POST CURED FOR 4 HOURS AT 400 °F.
6. THIS PART MEETS ALL THE REQUIREMENTS OF SAE/USCAR-2, INCLUDING HIGH TENSILE AND IMMERSION.
7. FOR P/N 12497599 ONLY
PART TO BE POST BAKED FOR 4 HOURS AT 400 °F.

[illegible]