
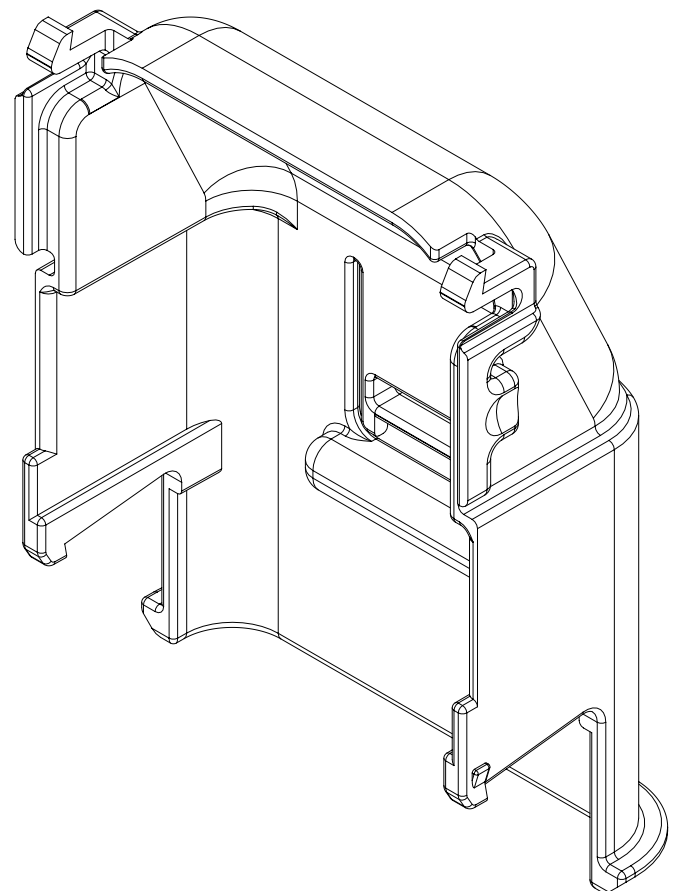
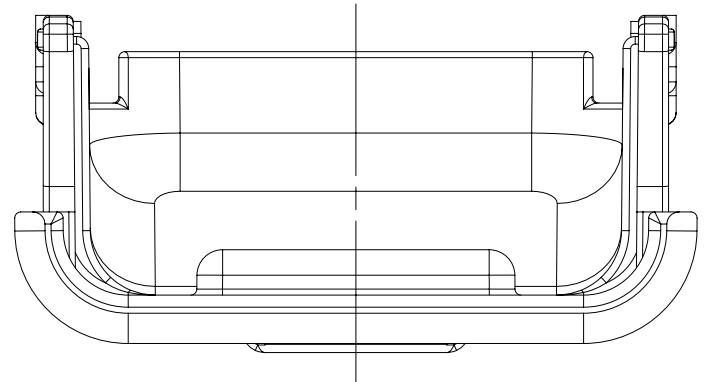
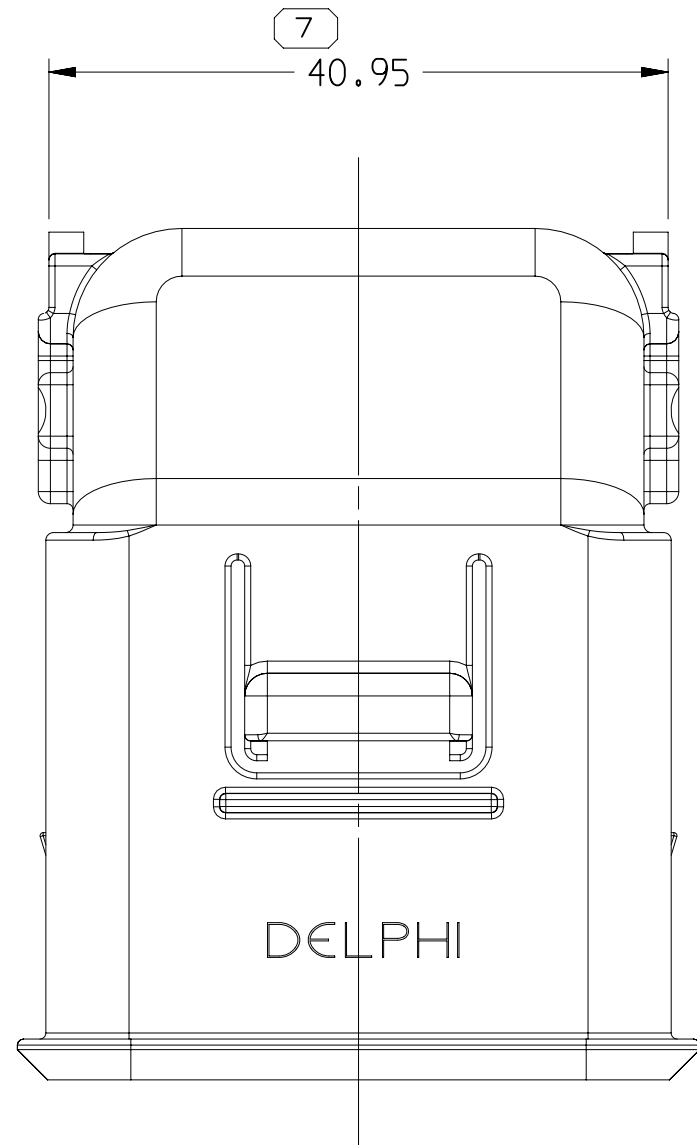
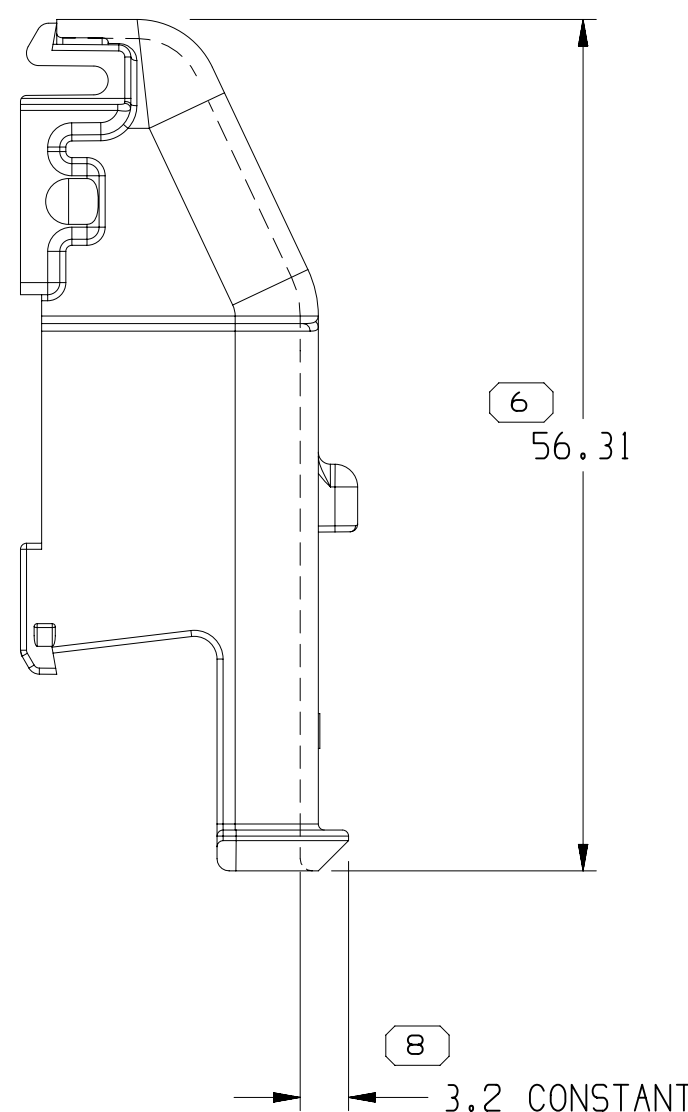
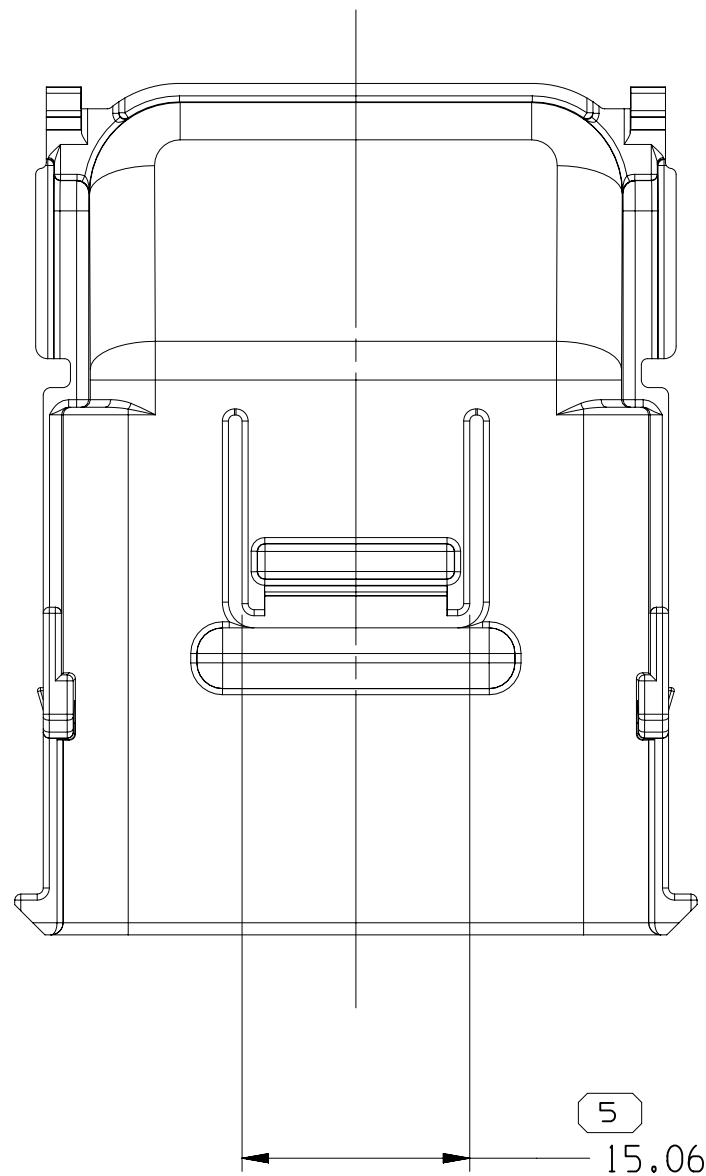
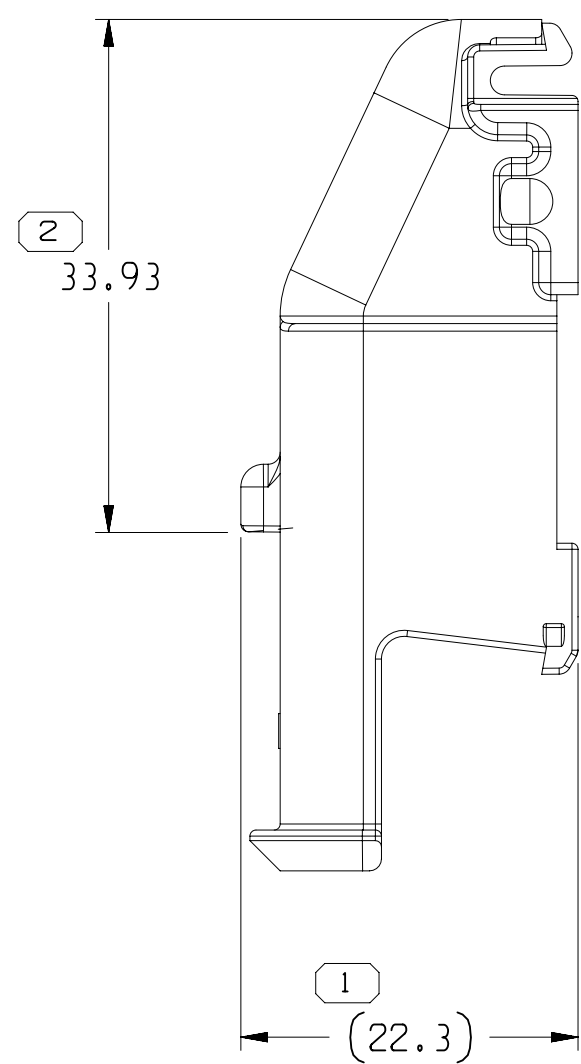
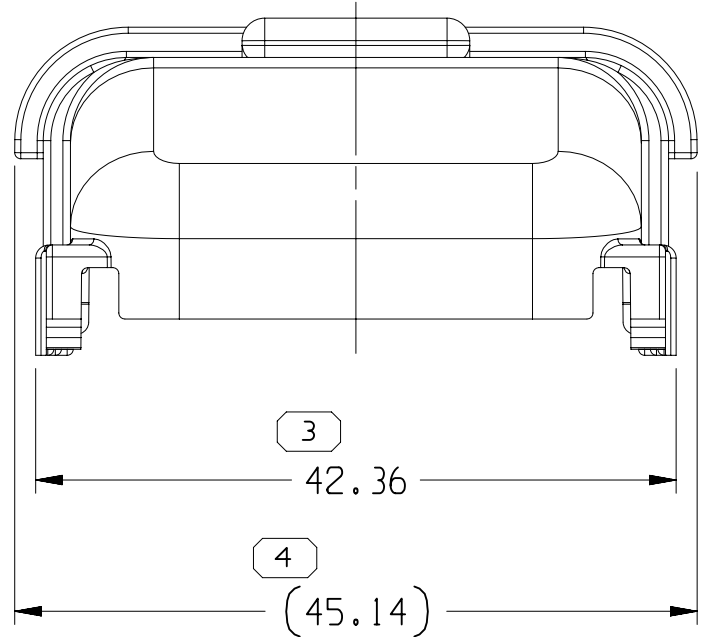


OPTIONAL CONSTRUCTION
THIS IS THE PREFERRED CONSTRUCTION FOR NEW
TOOL BUILDS

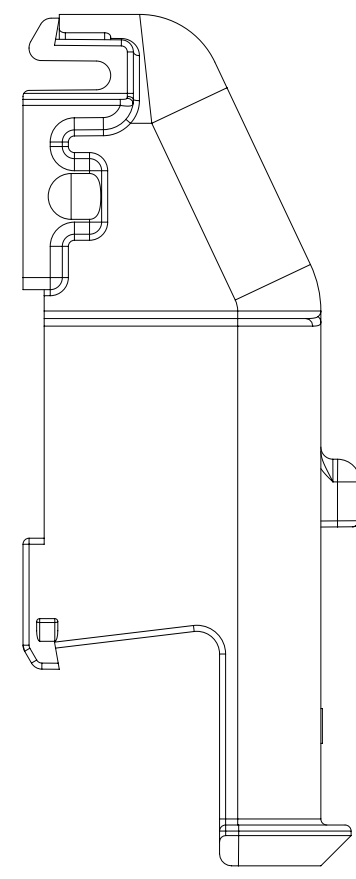

SYMBOL DEFINITION	
A DIMENSION WITHOUT AN INSPECTION REPORT SYMBOL DOES NOT REQUIRE INSPECTION. IT MAY BE CONTROLLED ON THE INDIVIDUAL COMPONENT DRAWING.	TOTAL NO OF INSPECTIONS REQUIRED
	8
	LAST NO. USED
	8

MISSING SYMBOLS	
NO MISSING SYMBOL NUMBER	
DATE	19MR04
STG	R
REV	01
N/P	-
CHG	-
ZONE	-
REVISION HISTORY	
ALL PARTS - RELEASED PER PTRS N152858	
ALL PARTS - ADDED OPTIONAL CONSTRUCTION	
AUTH	251966
DR	ADK
APVD	ADK
REV	SM
DATE	28N017
STG	R
REV	02
N/P	-
CHG	-
ZONE	-
REVISION HISTORY	
ALL PARTS - ADDED OPTIONAL CONSTRUCTION	
AUTH	438446
DR	AHG
APVD	AHG
REV	HV

15489189	02	-	M4695002 PBT-BLK	15480436	5.256
15489188	02	-	M4695003 PBT-GRA	15480438	5.256
PART NO	REV	N/P	MATERIAL SPECIFICATION AND COLOR	MATING CONNECTOR	VOLUME

NOTES

- UNLESS OTHERWISE SPECIFIED AND/OR INDICATED: DIMENSIONS ARE TO FACE OF VIEW SHOWN AND AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION (SEE MATH MODEL FOR PRECISE DIMENSIONS). FOR ALL OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA.
- MATING COMPONENTS OR EQUIVALENT: SEE CHART
- MATERIAL RECYCLING CODE PER ISO 11469, (2.31X10.11) RAISED CHARACTERS AS SHOWN TO BE LOCATED ON ANY EXTERIOR SURFACE. OPTIONAL CONSTRUCTION TO BE NO MATERIAL RECYCLING CODE.
- CORPORATE BRAND TO BE APPLIED TO PRODUCT DESIGN PER THE LATEST REVISION OF ESD S1085201.

DIMENSIONAL RANGE		IMM1		CHART 1	
FROM	> 0	> 20	> 30	> 70	> 100
TO	20	30	70	100	150
TOLERANCE UNLESS OTHERWISE SPECIFIED					
	±0.15	±0.2	±0.3	±0.4	±0.5
ANGULAR TOLERANCE ±2°					