| SYMBOL DEFINITION | | MISSING NUMBERS |
|---|---|---|
| THE NUMBER SHOWN IN THIS SYMBOL CORRESPONDS TO THE NUMBER ON THE INSPECTION REPORT FOR THIS DRAWING/PART NUMBER | TOTAL NO. OF SYMBOLS 13<br>DRAWING LAST NO. USED 62 | |

| DATE | ECN | REV | INIT | CHK | ZONE | REVISION HISTORY | AUTH | GP | APVD | APVD |
|---|---|---|---|---|---|---|---|---|---|---|
| 07MAY02 | R | C7 | - | - | | UPDATED PIN ATTRIBUTES | 350XC | RVP | RVP | JR |
| 14JUL03 | R | C8 | - | - | | REMOVED PSE 12 PLCS | 350831 | RVP | RVP | JR |




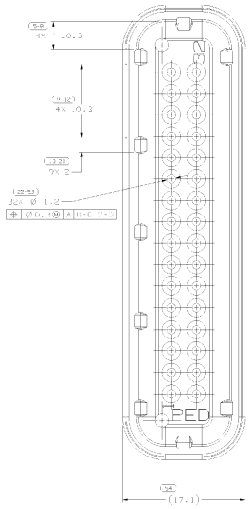


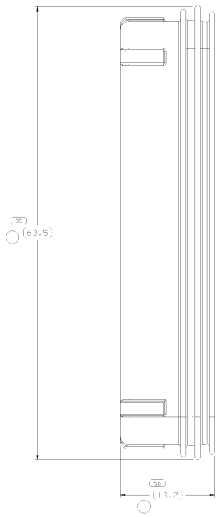


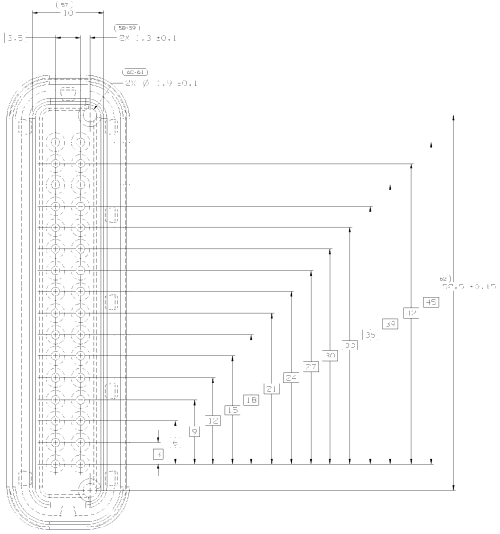


NOTES

1. UNLESS OTHERWISE SPECIFIED AND/OR INDICATED:
   DIMENSIONS ARE TO FACE OF VIEW SHOWN AND
   AUTOMATICALLY MEASURED IN COMPLIMENTOM INSPECTION.
   (SEE VATI MODEL FOR PROCESS DIMENSIONING.) FOR ALL
   OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL
   BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA
2. SEAL TO BE USED IN CONJUNCTION WITH STRAIN RELIEF 12129035, OR EQUIVALENT.
3. MATING FEMALE CONNECTOR 12129025, OR EQUIVALENT.
4. THIS PART ALSO USED W/ 14 POSITION 12129091, (HARMINA 12084912, CAVITY PLUGS: 12123557, G.P.A. 12110299, AND WHEN FULLY ASSEMBLED MATES TO HEADER CONNECTOR ASSEMBLY 12129006 OR EQUIVALENTS.
5. ENVIRONMENTAL SEAL CLASS CODE 4.

THE FOLLOW AS APPLICABLE (UNLESS OTHERWISE SPECIFIED)
DIMENSIONS ESTABLISHED FOR FEATURES AFTER PLATING
TRUE POSITION TOLERANCE APPLIES AT MAXIMUM MATERIAL CONDITION (M.M.C.) UNLESS NOTED "RFS"
DATUMS ARE ESTABLISHED BY FEATURE SIMULATION
ALL ADHERENCE TO PRINTED TOLERANCES IS REQUIRED FOR ALL PLATED AND NON-PLATED FEATURES
ANY CHANGE TO THIS DRAWING REQUIRES ENGINEERING AUTHORIZATION
ANSI Y14.5M-1994

| DRAWING CREATING SYMBOLS | |
|---|---|
| A FLAT<br>STAMP A POTENTIOMETER<br>B ROUND<br>C CUT THROUGH<br>D ROUND MEASURE @ CONDITION (MMC)<br>E ROUND<br>F TRANSPARENT<br>G TRANSLUCENT<br>H PROJECTION TOLERANCE ZONE | I CYLINDRICAL<br>K TRUE POSITION<br>L CUSTOMER MARKET<br>M DIA. MARKED<br>N DIAMETER<br>[P.T.] MAJOR DIMENSION |

| PART DRAWING | |
|---|---|
| TITLE | |
| VOLUME IDENT | SYSTEM USER |
| PART NO | A001 |

UNLESS OTHERWISE SPECIFIED

THIS DRAWING IS THE PROPRIETARY PROPERTY OF DELPHI PACKARD ELECTRIC SYSTEMS AND IS LOANED SUBJECT TO AGREEMENT THAT NEITHER IT NOR THE INFORMATION IT DISCLOSES WILL BE USED, COPIED OR REPRODUCED EXCEPT AS MAY BE EXPRESSLY PERMITTED IN WRITING BY DELPHI PACKARD ELECTRIC SYSTEMS. ANY RIGHTS IN INVENTIONS EXERCISED BY USE OF THIS DRAWING ARE RESERVED TO DELPHI PACKARD ELECTRIC SYSTEMS.

| MATERIAL | |
|---|---|
| | 4XX/6XX SILICONE COMPOUND |
| SHEET 01 NAME | SEAL, CONN, 100W 6PN |

DELPHI

DELPHI PACKARD ELECTRIC SYSTEMS
WARREN

| BY | DATE |
|---|---|
| APVD C. KLEMME | 19FEB91 |
| APVD C. COLESNICK | 12APR91 |
| APVD C. HOLDER | 17APR91 |
| APVD4 | |
| APVD5 | |

SUBSTANCES OF CONCERN ARE PRESENT IN THIS PRODUCT

| DRAWING NUMBER | |
|---|---|
| | 12129026 |

| SIZE | SCALE | FORMAT | SHT | REV |
|---|---|---|---|---|
| A0 | 5:1 | 1 OF 1 | 1 | R |