SYMBOL DEFINITION		
A DIMENSION WITHOUT AN INSPECTION REPORT SYMBOL ( ) DOES NOT REQUIRE INSPECTION. IT MAY BE CONTROLLED ON THE INDIVIDUAL COMPONENT DRAWING.	TOTAL NO OF INSPECTIONS REQUIRED	5
	LAST NO. USED	5

MISSING SYMBOLS
NO MISSING SYMBOL NUMBER

DWG STATUS					ZONE	REVISION HISTORY	AUTH	DR	APVD 1	APVD 2
DATE	STG	REV	N/P	C/G						
03APD6	R	01	-	-	-	WAS PE150342 AND RELEASED	2790894	EAF	EAF	PH
29MI07	R	01	AA	-	-	REVISED NOTES	2923367	EFS	RAD	DB

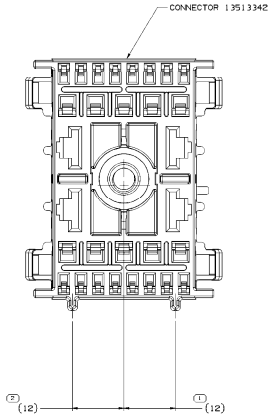

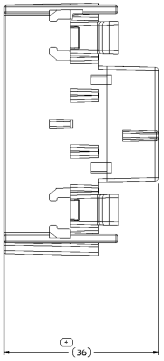

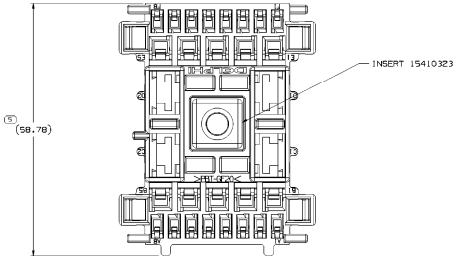



NOTES

1. UNLESS OTHERWISE SPECIFIED AND/OR INDICATED:
   DIMENSIONS ARE TO FACE OF VIEW SHOWN AND AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION (SEE MATH MODEL FOR PRECISE DIMENSIONS). FOR ALL OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA.
2. SEALING CODE 0 - UNSEALED
3. THIS PART ACCEPTS THE FOLLOWING COMPONENTS OR EQUIVALENT:
   CAVITIES A1 TO A8,F1 TO F8 TO ACCEPT 15496302 TERMINAL.
   MAX INSULATION CRIMP MUST BE LESS THAN 5.32 HIGH AND 2.85 WIDE.
   CAVITIES B1 TO B3,E1 TO E3 TO ACCEPT 15496304 TERMINAL.
   MAX INSULATION CRIMP MUST BE LESS THAN 5.32 HIGH AND 5.15 WIDE.
   CAVITIES C1 & C2,D1 & D2 TO ACCEPT 12065915 TERMINAL.
   MAX INSULATION CRIMP MUST BE LESS THAN 6.3 HIGH AND 9.7 WIDE.
   SECONDARY TERMINAL LOCK 15467558.
   WIRE DRESS COVER 13570049.
4. ASSEMBLY NUT INSERT PUSH OUT FORCE IS 800 N MINIMUM.



NUMBER OF DECIMALS	RADIUS	ANGLE	FILLETS
FROM 0 TO 3	>0 TO 20	>0 TO 40	>0 TO 20
	>20 TO 40	>40 TO 60	>20 TO 40
	>40 TO 60	>60 TO 80	>40 TO 60
	>60 TO 80	>80 TO 100	>60 TO 80
	>80 TO 100	>100 TO 120	>80 TO 100
	>100 TO 150	>120 TO 150	>100 TO 150
	>150 TO 200	>150 TO 200	>150 TO 200
	>200 TO 300	>200 TO 300	>200 TO 300
	>300 TO 400	>300 TO 400	>300 TO 400
	±0.15	±0.2	±0.3
	±0.3	±0.4	±0.5
	±0.5	±0.8	±1
	±1.2		

TOLERANCE UNLESS OTHERWISE SPECIFIED

ANGULAR TOLERANCE ±2°

DWG TYPE	PART DRAWING
STYLE	GMT900
VOLUME, KONT	ENTER DWG

UNLESS OTHERWISE SPECIFIED
REFER PROCESS TO PA -PROCESSMART WITH LANG 1.4 RAL 1084 TO INCLUDE A 1.0MM NO BLEED, STANDARD FINISH. THE PROCESS SHALL BE CONDUCTED IN ACCORDANCE WITH PROCESS NO. SP BASED SEAMLESS, REQUIREMENTS OF SATCM REFERENCE.

ALL DIMENSIONS ARE IN MILLIMETERS

REFERENCE

(S) PROCESS SENSITIVE DIMENSION

DIMENSIONS MARKED TO A 1 INDICATE MATERIAL CHARACTERISTICS AS PER SPECIFICATION

THIRD ANGLE PROJECTION

DO NOT SCALE

USE MATH DATA

NX

DELPHI

DELPHI PACKARD ELECTRICAL/ELECTRONIC ARCHITECTURE
WARREN, OH

DR		DATE
APVD1	E. AVILA	03APD6
APVD2	E. AVILA	03APD6
APVD3	P. HELD	04APD6
APVD4		
APVD5		

SUBSTRATES OF CONCERN AND REQUIRED CONTENT PER DELPHI (04P600)

MATERIAL: SEE CHART

DRAWING NAME: ASM CONN 30 F DT 150 280 M/P 800

DRAWING NUMBER: 13567518

SIZE	SCALE	FORMAT	SHEET NO	TOTAL	REV	N/P
A0	2:1	1 OF 1	1 OF 1	R	01	AA