SHIELDING OUTER FURRULE FOR 16 SQMM² CABLE - 33340554

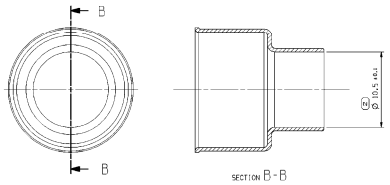


SHIELDING OUTER FURRULE FOR 25 SQMM² CABLE - 35172745

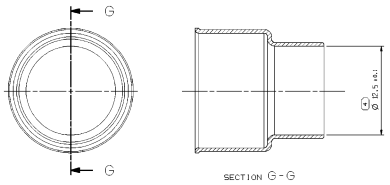


SHIELDING OUTER FURRULE FOR 35 SQMM² CABLE - 35172743

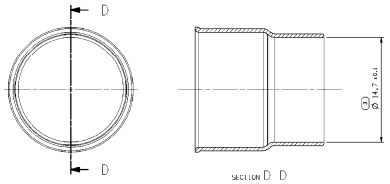


SHIELDING OUTER FURRULE FOR 50 SQMM² CABLE - 33340551

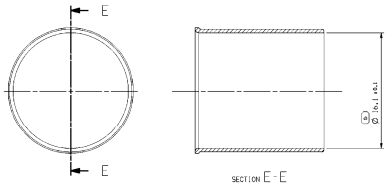


| SYMBOL DEFINITION | | |
|---|---|---|
| A DIMENSION WITHOUT AN INSPECTION REPORT SYMBOL (□) DOES NOT REQUIRE INSPECTION. IT MAY BE CONTROLLED ON THE INDIVIDUAL COMPONENT DRAWING. | TOTAL NO OF INSPECTIONS REQUIRED | 8 |
| | LAST NO. USED | 8 |

| MISSING SYMBOLS |
|---|
| NO MISSING SYMBOL NUMBER |

| ENG STATUS | | | | | ZONE | REVISION HISTORY | AUTH | DR | APVD/APVD |
|---|---|---|---|---|---|---|---|---|---|
| DATE | STR | REQ | N/P | DIR | | | | | |
| 18JAN | R | 01 | - | - | - | CREATED TAXI DRAWING | 418642 | HWM | WG JAY2 |






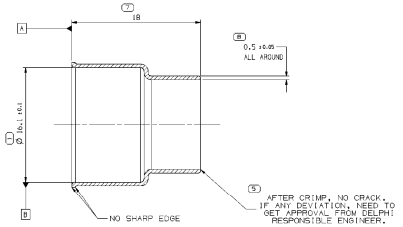


SECTION A-A



NOTES

1. UNLESS OTHERWISE SPECIFIED AND/OR INDICATED:

   DIMENSIONS ARE TO FACE OF VIEW SHOWN AND AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION (SEE MATH MODEL FOR PRECISE DIMENSIONS). FOR ALL OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA.

2. PARTS SHOWN ON THIS DARWING USED IN LAYOUTS SHOWN ON TAXI 33704479.

3. PLATING: NI, 1.5-4 MICROMETER PER ASTM B689, TYPE I, CLASS X.

4. PART HAS TO BE DELIVERED DEGREASED.

5. PART MUST BE WATERPROOF PACKING.

6. PARTS MUST BE FREE OF CRACKS.

7. ONLY RECOMMENDED CABLE ACC. TO LV216-2. CABLE SIZE: 16/25/35/50 MM² PER WA371 VALIDATED. ALL OTHER CABLE SUPPLIERS / CABLE SIZES MUST BE VALIDATED.

8. RAW MATERIAL SHOULD BE 24% IACS MIN.

| PART NO | REV | N/P | DESCRIPTION | MATERIAL | VOLUME (CM³) | CABLE OD (MM) |
|---|---|---|---|---|---|---|
| 33340551 | 01 | - | SHIELDING OUTER FERRULE FOR 50 MM² CABLE | COPPER ALLOY | 0.4717 | 10.2 ±0.1 |
| 35172743 | 01 | - | SHIELDING OUTER FERRULE FOR 35 MM² CABLE | COPPER ALLOY | 0.4598 | 12.2 ±0.1 |
| 35172745 | 01 | - | SHIELDING OUTER FERRULE FOR 25 MM² CABLE | COPPER ALLOY | 0.4642 | 14.1 ±0.1 |
| 33340554 | 01 | - | SHIELDING OUTER FERRULE FOR 16 MM² CABLE | COPPER ALLOY | 0.4641 | 15.8 ±0.1 |

THE DRAWN TERMINAL PART NUMBER INDICATES THAT PHYSICAL PARTS ARE NOT AVAILABLE FOR ORDERING.

PART NUMBERS THAT OR NOT HAVE A LINE PRESENT INDICATE THAT PHYSICAL PARTS ARE AVAILABLE FOR ORDERING.

CONTACT DELPHI SALES TO VERIFY AVAILABILITY OF PARTS.

DRAWING TYPE: PART DRAWING

STYLE

VOLUME (CM³): SEE CHART

SHEET SIZE:

UNLESS OTHERWISE SPECIFIED

DATA ACCORDING TO IS INTERCHANGED WITH ISO 1101 AND ASME Y14.5M. ALL DIMENSIONS AND TOLERANCES ARE ACCORDING TO ISO 1101 AND ASME Y14.5M. FEATURES NOT DIMENSIONED OR TOLERANCED ARE NOT CONTROLLED BY THIS DRAWING.

ALL DIMENSIONS ARE IN MILLIMETERS

PROCESS DIRECTIVE DRAWING

DIMENSIONS AND LIMITS ARE IN ACCORDANCE WITH ISO 1101 AND ASME Y14.5M. ALL DIMENSIONS ARE IN MILLIMETERS

| DIMENSIONAL RANGE (MM) | CLASS C |
|---|---|
| FROM | TO |
| 0 | >12 |

| TOLERANCE LIMITS FOR DIMENSIONS SPECIFIED AS: | |
|---|---|
| MAX | MIN |
| ABSOLUTE TOLERANCE ±0.1 | |

THIRD ANGLE PROJECTION

DO NOT SCALE

USE MATH DATA

NX

REFERENCE

MATERIAL: SEE CHART

SUBSTANCES OF CONCERN AND RECYCLED

COPYRIGHT FOR DELPHI (EMMEDI)

DELPHI

DELPHI PHOMO ELECTRICAL/ELECTRONIC ARCHITECTURE

COPYRIGHT 2018 DELPHI AUTOMOTIVE SYSTEMS LLC
ALL RIGHTS RESERVED.

THIS DRAWING IS THE PROPERTY OF DELPHI CORPORATION AND CONTAINS DISTINCT CONFIDENTIAL INFORMATION. IT MAY NOT BE USED OR DISCLOSED EXCEPT AS MAY BE EXPRESSLY AUTHORIZED IN WRITING BY DELPHI. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF DELPHI IS PROHIBITED.

| DR | | |
|---|---|---|
| APVD1 | HUIMEI HUANG | 18JAN |
| APVD2 | WENQIU JIANG | 18JAN |
| APVD3 | ANYANG ZHANG | 18JAN |
| APVD4 | | |
| APVD5 | | |

DRAWING NAME: TAXI TERM FERRULE NI

DRAWING NUMBER: 33340550

| SIZE | SCALE | FRAME NO | SHEET NO | QTY | REV | N/P |
|---|---|---|---|---|---|---|
| A0 | 5:1 | 1 OF 1 | 1 OF 1 | 1 | R | 01 - |