



MISSING SYMBOLS	DWG STATUS					ZONE	REVISION HISTORY	AUTH	DR	APVD 1	APVD 2
	DATE	STG	REV	N/P	CHG						
NO MISSING SYMBOL NUMBER	28JAI19	R	01	-	-	-	CREATED PART DRAWING			LG	AM
	07MR19	R	02	-	-	-	MODEL UPDATED	440273		LG	AM
	15MR21	R	03	-	-	-	UPDATED ATTRIBUTES.	446201	LG	AM	LG
	07AP21	R	03	AA	-	-	ADDED COMPONENTS 35544641, 35544643, AND 35544645	446201	LG	AM	LG
	25JA22	R	03	AB	-	-	REMOVED COMPONENTS 35544641, 35544643, AND 35544645, ADDED COMPONENTS 35544644	448336	LG	AM	LG

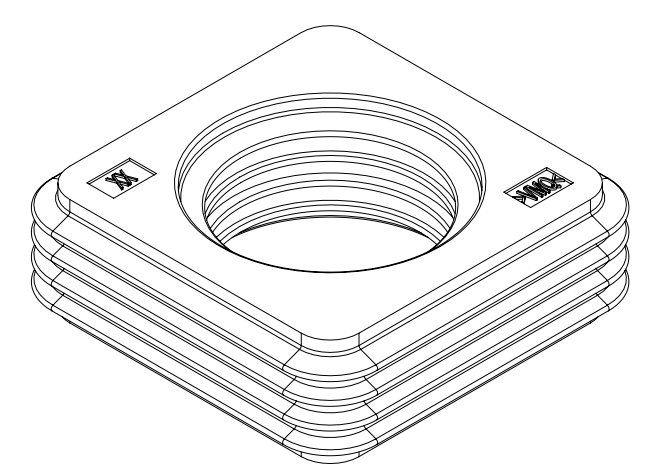

2
— SEALING RIBS MUST BE FREE OF
SINKS, VOIDS, KNIT LINES AND
FLASH IN THE AREA SHOWN
ALL AROUND PART.
MOULD SURFACE ROUGHNESS Ra 0.3µm MAX.

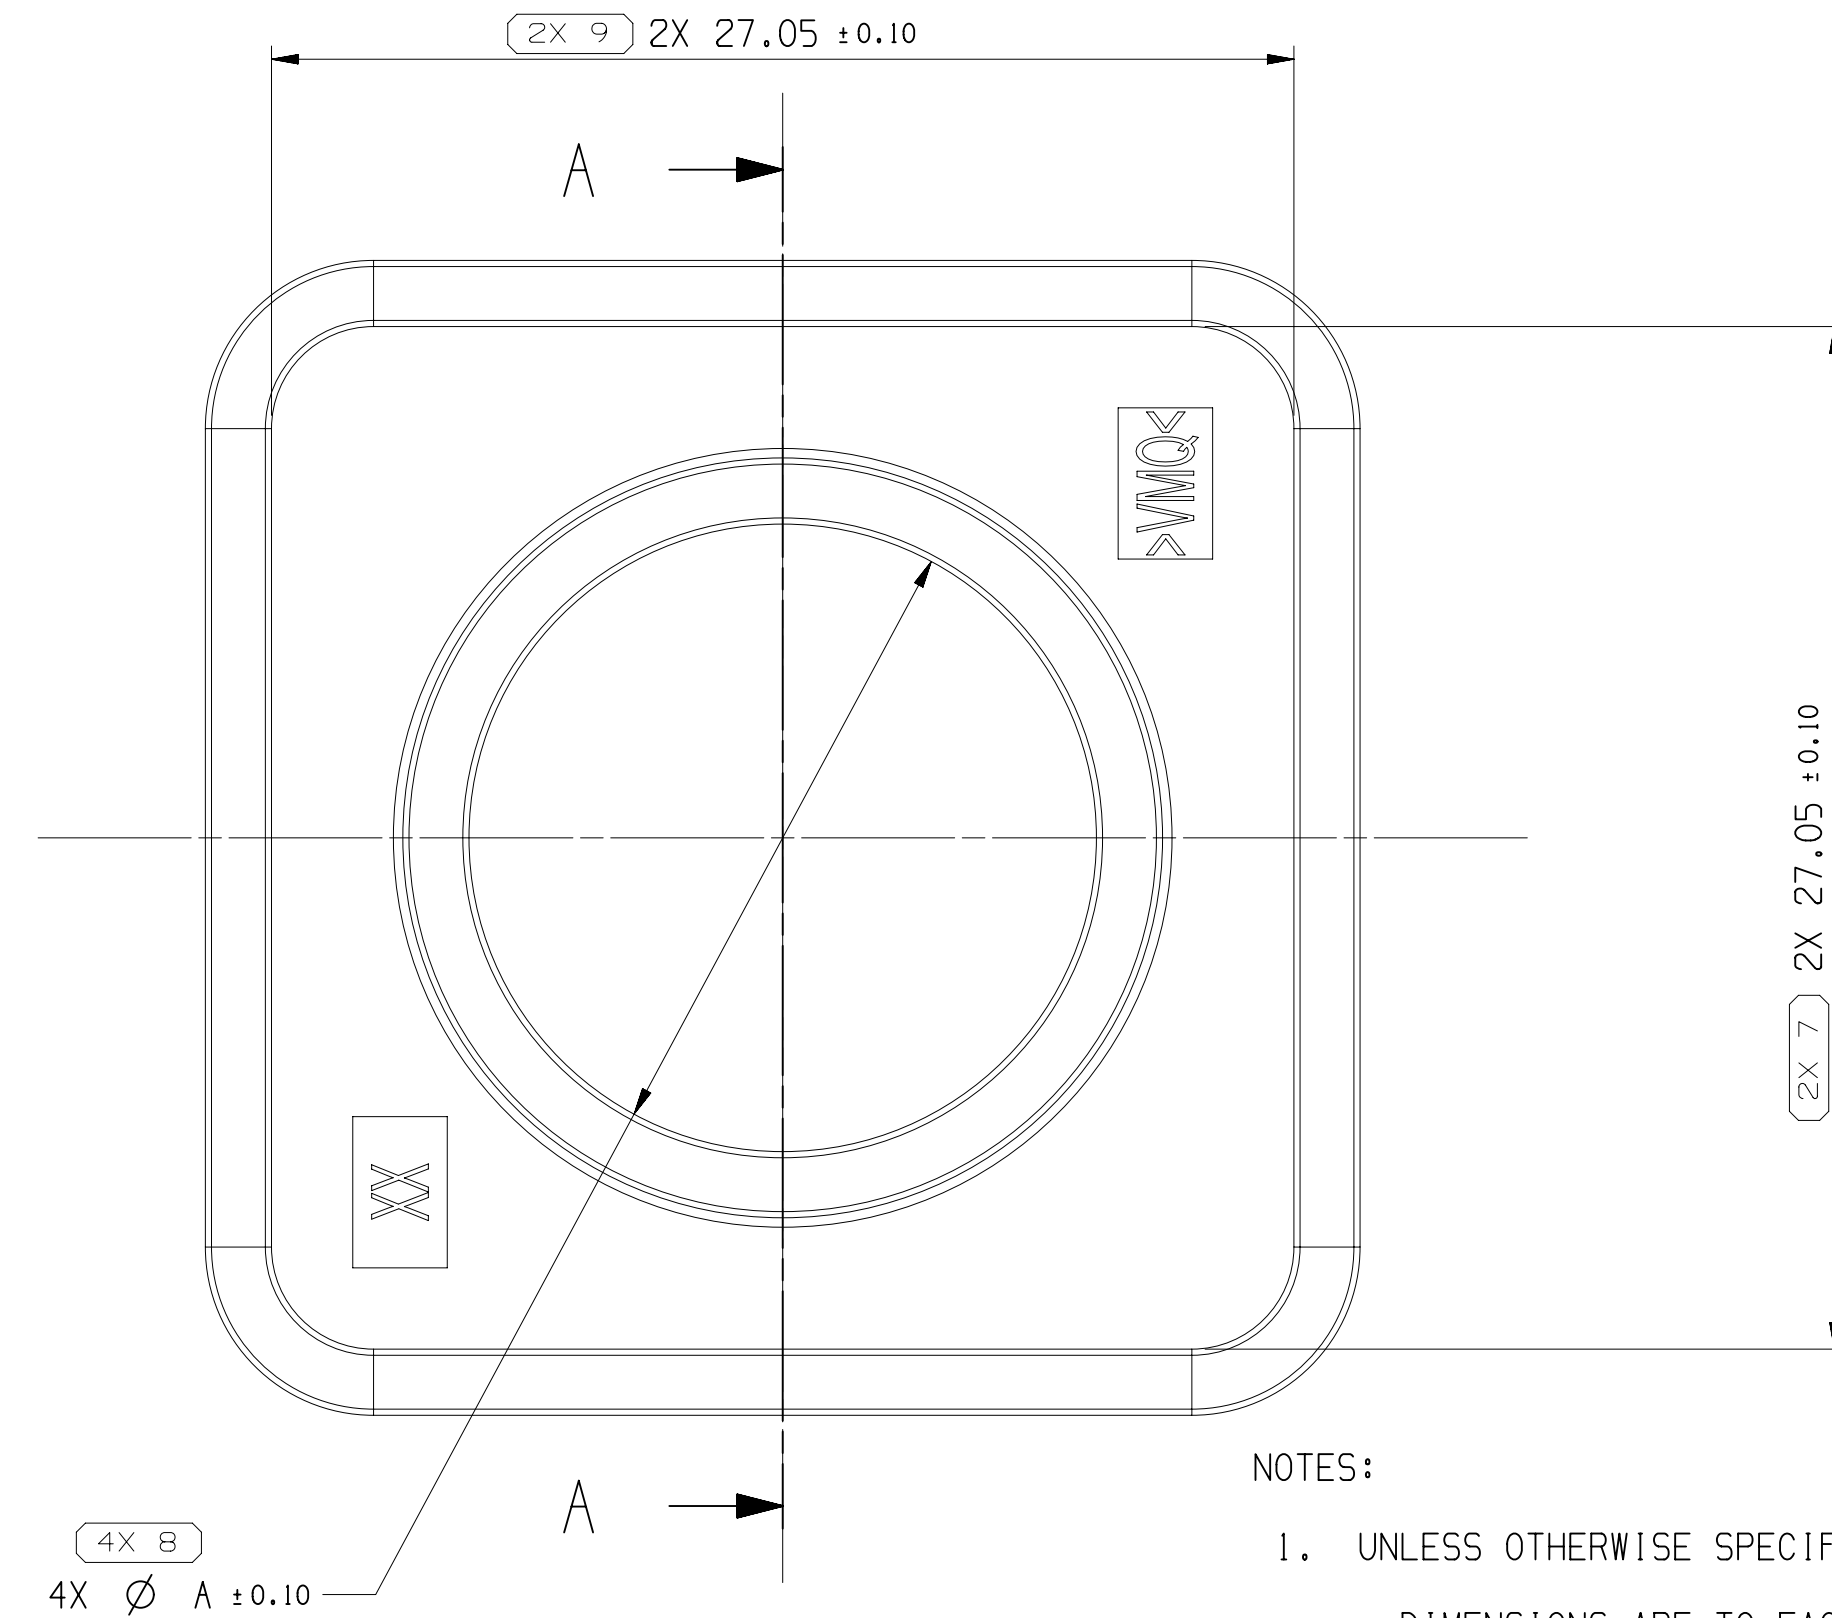

5	PROCESS SENSITIVE DIMENSION
DIMENSIONS ENCLOSED IN () INDICATE REFERENCE DIMENSIONS AND NO TOLERANCE LIMITS ARE ESTABLISHED	

• A P T I V •							
CONNECTION SYSTEMS Ningbo, China COPYRIGHT 2019 APTIV. ALL RIGHTS RESERVED.							
THIS DRAWING IS THE PROPERTY OF APTIV AND CONTAINS APTIV CONFIDENTIAL INFORMATION. THE REPRODUCTION, DISTRIBUTION AND UTILIZATION OF THIS DOCUMENT OR ITS RELATED CAD MATH DATA, AS WELL AS COMMUNICATION OF ANY CONTENT TO OTHERS, WITHOUT EXPRESS AUTHORIZATION, IS PROHIBITED.							
						DATE	
DR							
APVD1	LINK GAO					28JA19	
APVD2	ARTHUR MA					28JA19	
APVD3	LINK GAO					28JA19	
APVD4							
APVD5							
SUBSTANCES OF CONCERN AND RECYCLED CONTENT PER APTIV 10949001							
MATERIAL SEE TABLE							
DRAWING NAME TAXI SEAL CBL 0W							
DRAWING NUMBER 35228848							
SIZE	SCALE	FRAME NO	SHEET NO	STD	REV	N/P	
A1	5:1	1 OF 1	1 OF 1	R	03	AB	

35544644	01	RUBBER, BLUE	19.3	20.9 _{-0.6}	4.41	95
35210634	01	RUBBER, GREEN	14.2	15.8 _{-0.6}	5.9	50
35210635	01	RUBBER, NATURAL	16.6	18.2 _{-0.6}	5.24	70
35210636	01	RUBBER, RED	19.3	20.9 _{-0.6}	4.41	95
PART NO	REV	MATERIAL SPECIFICATION & COLOR	DIM. A	CABLE OD	VOLUME (CM ³)	CABLE SIZE

DIMENSIONAL RANGE (MM)							CHART M		
FROM TO	> 0	> 6 30	> 30 70	> 70 120	> 120 160	> 160 200	> 200 250	> 250 315	> 315 400
TOLERANCE UNLESS OTHERWISE SPECIFIED									
	±0.1	±0.2	±0.3	±0.4	±0.45	±0.55	±0.7	±0.85	±1.05
ANGULAR TOLERANCE ±1°									