| SYMBOL DEFINITION | | | MISSING SYMBOLS |
|---|---|---|---|
| A DIMENSION WITHOUT AN INSPECTION REPORT SYMBOL ( ) DOES NOT REQUIRE INSPECTION. IT MAY BE CONTROLLED ON THE INDIVIDUAL COMPONENT DRAWING. | TOTAL NO OF INSPECTIONS REQUIRED | 22 | NO MISSING SYMBOL NUMBER |
| | LAST NO. USED | 22 | |

| DWG STATUS DATE | STG | REV | N/P | CHG | ZONE | REVISION HISTORY | AUTH | DR | APVD 1 | APVD 2 |
|---|---|---|---|---|---|---|---|---|---|---|
| 25OC96 | R | A | - | - | | WAS PE061841 & RELEASED | 960005 | PHC | PHC | FKV |
| 16DE96 | R | A1 | - | - | | CPAD CREATED | 960009 | ELO | ELO | MVA |
| 13FE97 | R | B | - | - | | REVISED | 178021 | PYP | PYP | PYP |
| 04AU97 | R | B1 | - | - | | REV SYM ADVANCED | 180267 | GGI | GGI | FKV |
| 20MR02 | R | B2 | - | - | | UPDATED PDM ATTRIBUTES | 215066 | HAM | HAM | DLB |
| 11MR03 | R | B3 | - | - | | ADDED NOTE #5; MATL SPEC WAS R0100111 | 238060 | MAC | MAC | MP |
| 01OC03 | R | B4 | - | - | | REVISED TOLS (2 PLCS) | 246387 | FKV | FKV | MP |
| 08OC03 | R | B5 | - | - | | REVISION LEVEL FOR AUTHORITY NUMBER 246387 WAS 02 AD | 247129 | TLD | TLD | MP |
| 06FE04 | R | B6 | - | - | | REVISED TOLERANCES - (5PLCS) | 251748 | ADK | ADK | MLP |

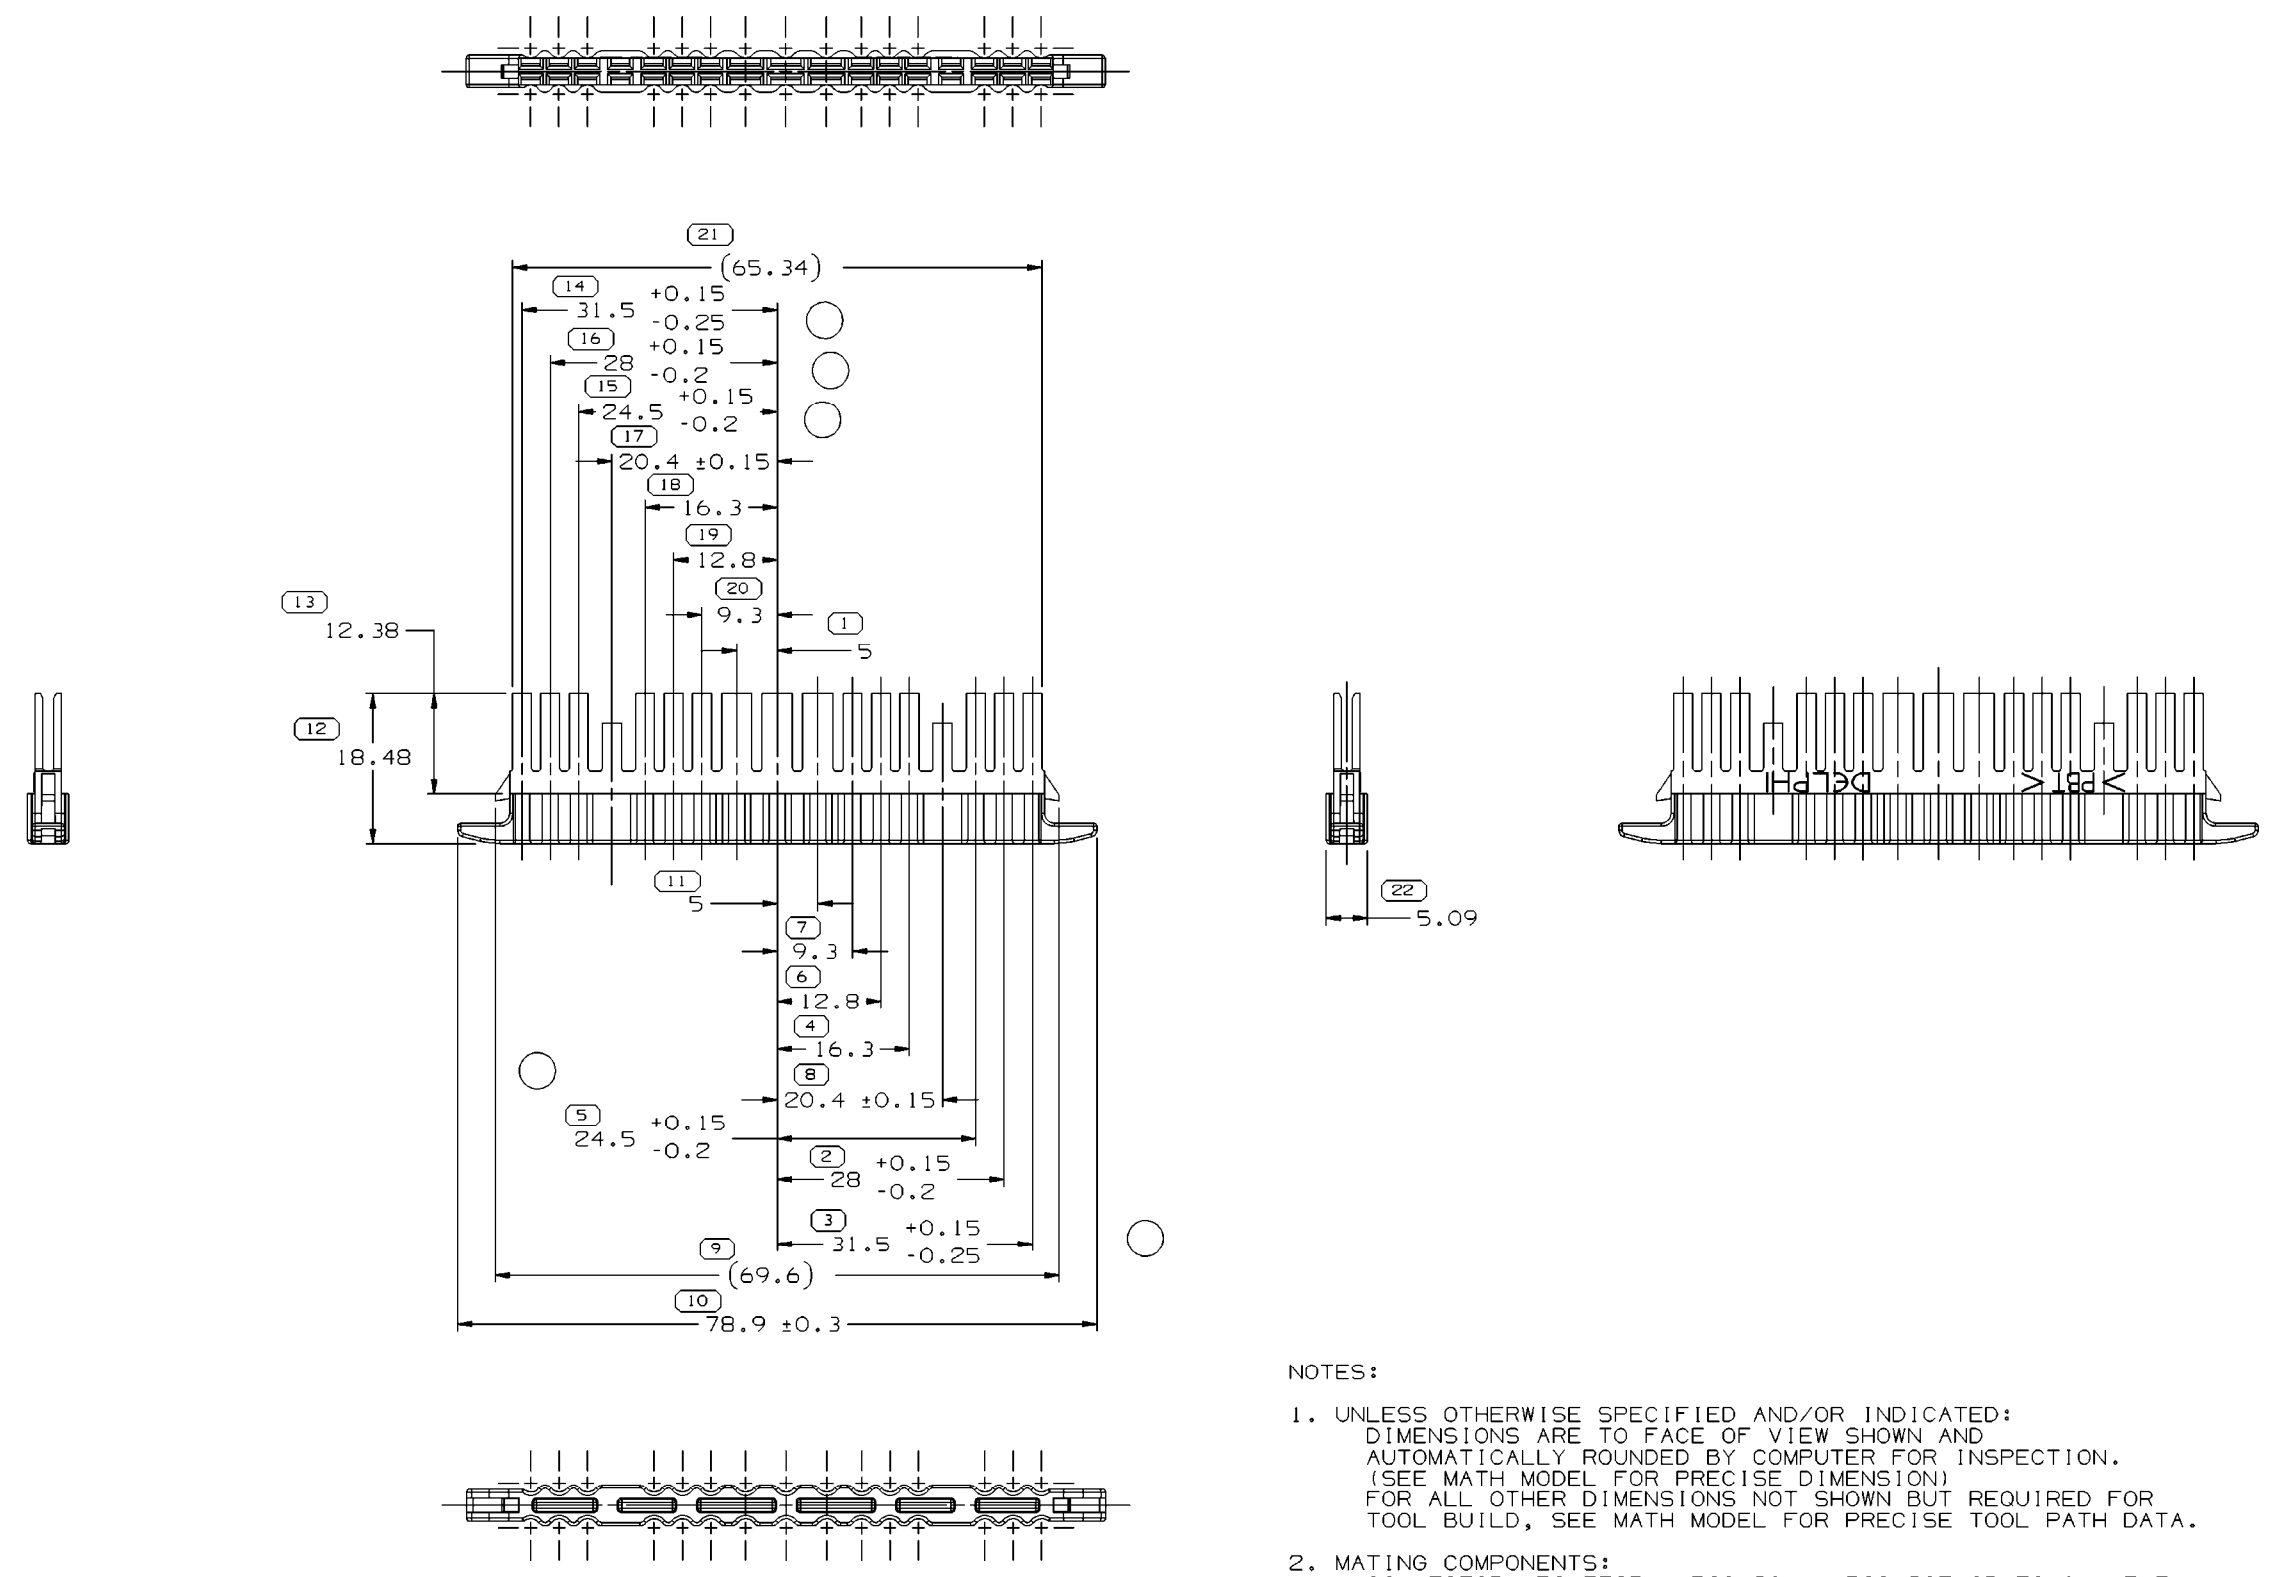




NOTES:

1. UNLESS OTHERWISE SPECIFIED AND/OR INDICATED:
   DIMENSIONS ARE TO FACE OF VIEW SHOWN AND AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION. (SEE MATH MODEL FOR PRECISE DIMENSION)
   FOR ALL OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA.
2. MATING COMPONENTS:
   CONNECTOR 15317735, 15304906, 15304907 OR EQUIVALENT.
3. MATERIAL RECYCLING CODE PER ISO 11469. (2.3)X(0.1) RAISED CHARACTERS AS SHOWN TO BE LOCATED ON ANY EXTERIOR SURFACE. OPTIONAL CONSTRUCTION TO BE NO MATERIAL RECYCLING CODE.
4. (2.3)X(0.1) RAISED DELPHI CORPORATE BRAND TO BE LOCATED ON ANY EXTERIOR SURFACE, PREFERABLY VISIBLE AT FINAL ASSEMBLY. OPTIONAL CONSTRUCTION TO BE "PED" OR NO LOGO.
5. MEASURE DIMENSIONS 1-11, 14-21 WITH PART RESTRAINED FLAT ON BACK

(10) PROCESS SENSITIVE DIMENSION

DIMENSIONS ENCLOSED IN ( ) INDICATE REFERENCE DIMENSIONS AND NO TOLERANCE LIMITS ARE ESTABLISHED

SHARP CORNER TOLERANCE: R 0.1 MAX, R 0.2 MAX

| DIMENSIONAL RANGE (MM) | | | | | | | | | CHART E1 |
|---|---|---|---|---|---|---|---|---|---|
| FROM / TO | > 0 / 20 | >20 / 30 | > 30 / 70 | > 70 / 100 | >100 / 150 | >150 / 200 | >200 / 250 | >250 / 300 | >300 / 400 |
| TOLERANCE UNLESS OTHERWISE SPECIFIED | ±0.15 | ±0.2 | ±0.3 | ±0.4 | ±0.5 | ±0.6 | ±0.8 | ±1 | ±1.2 |

ANGULAR TOLERANCE ±2°

DWG TYPE: PART DRAWING

STYLE:

VOLUME (CM³): 2.617 — DISTR CODE: D

ROUTING: 6901

UNLESS OTHERWISE SPECIFIED

THIS DOCUMENT IS IN ACCORDANCE WITH ASME Y14.5M-1994 AS AMENDED BY THE GM GLOBAL DIMENSIONING AND TOLERANCING ADDENDUM - 1997. ALL GEOMETRIC TOLERANCES AND RELATED DATUMS APPLY RFS. RULE #1(PERFECT FORM AT MMC) DOES NOT APPLY WHEN RELATIONSHIP BETWEEN FEATURES IS ESTABLISHED BY ORIENTATION OR LOCATION TOLERANCES. SEPARATE POSITION CALLOUTS MAY BE GAGED SEPARATELY, REGARDLESS OF DATUM REFERENCE.

ALL DIMENSIONS ARE IN MILLIMETERS

REFERENCE

THIRD ANGLE PROJECTION

DO NOT SCALE

USE MATH DATA

CAD UNIGRAPHICS

DELPHI

DELPHI PACKARD ELECTRIC SYSTEMS
WARREN, OH

| | NAME | DATE |
|---|---|---|
| DR | | |
| APVD1 | H. CASTRILLON | 25OC96 |
| APVD2 | FCO. KOPCA | 25OC96 |
| APVD3 | JOE SVETTE | 01NO96 |
| APVD4 | | |
| APVD5 | | |

SUBSTANCES OF CONCERN AND RECYCLED CONTENT PER DELPHI 10949001

MATERIAL: M4695008 PBT-BLU

DRAWING NAME: LOCK TPA GT 150 280 30 BLU

DRAWING NUMBER: 15304912

| SIZE | SCALE | FRAME NO | SHEET NO | STG | REV | N/P |
|---|---|---|---|---|---|---|
| A1 | 2:1 | 1 OF 1 | 1 OF 1 | R | B6 | - |