


D



— SEALING RIBS MUST BE
FREE OF DEFECTS





- DESIGN HAS LIMITED SEALING CAPABILITY



MATING SHROUD MATERIAL:
GLASS-FILLED NYLON OR
GLASS-FILLED POLYESTER.

RECOMMENDED BLADE MATERIAL - MALE BLADE MATERIAL SHOULD HAVE AN ELECTRICAL CONDUCTIVITY $\geq 20\%$ IACS AT 68°F. USE OF A MATERIAL WITH CONDUCTIVITY $\leq 20\%$ IACS SHOULD BE APPROVED BY PACKARD ELECTRIC.

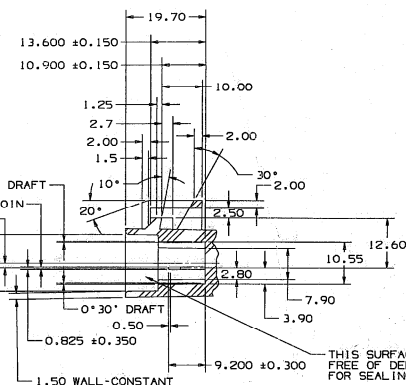

SECTION A - A

THIS SURFACE MUST BE
FREE OF DEFECTS
FOR SEALING

[illegible]

PART NO 1
1204 8412

			
THIRD ANGLE PROJECTION		DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED	
	TECHNICAL DRAWING OTHERWISE SPECIFIED APPROVAL $\pm$ 2		
CODE NO.	LOC.	ONE PLACE $\pm$ 0.5	TWO PLACE $\pm$ 0.15
DATE	C-5110	TR TECHNICAL SERVICE	
ISSUE	21NB4	APPR. F. HESTON	DATE 01/08/82
REFERENCE NO.	211	APPR. K. GRZEMIA	DATE 01/08/82
MATERIAL: SP-68		A. WINTYARD 27AUB	
SEE DRAWING			
NAME			
ASM CONN 4F M/P 480			
PART NUMBER		SIZ	
1204		842	