

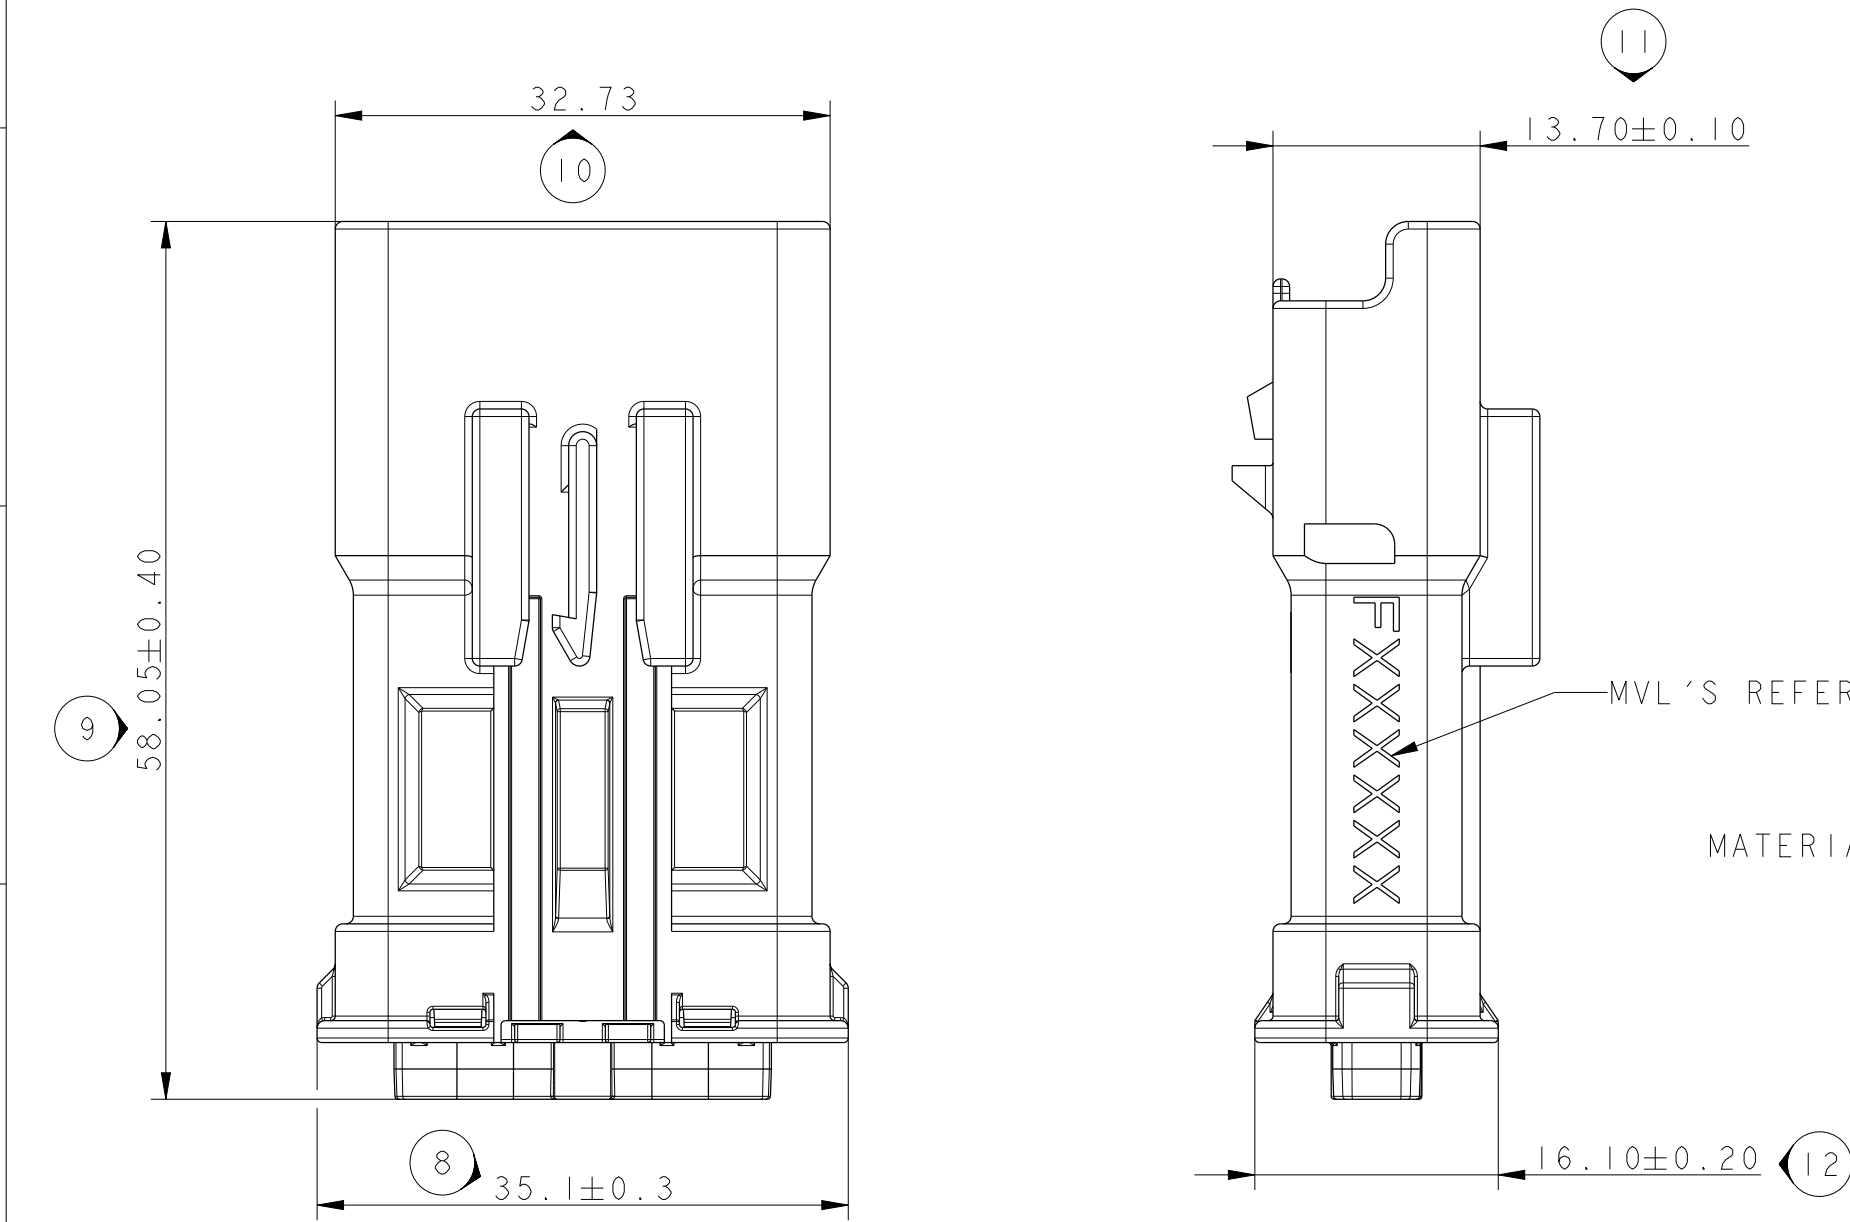
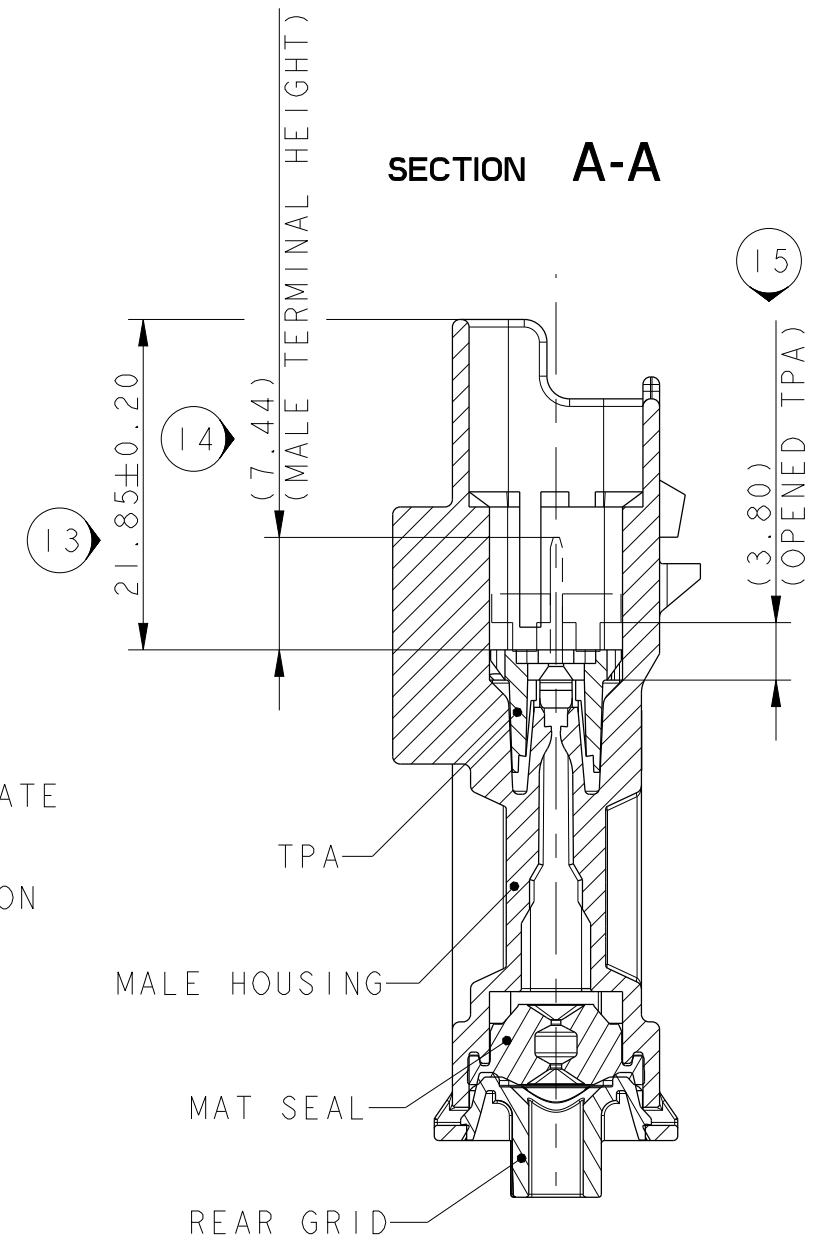
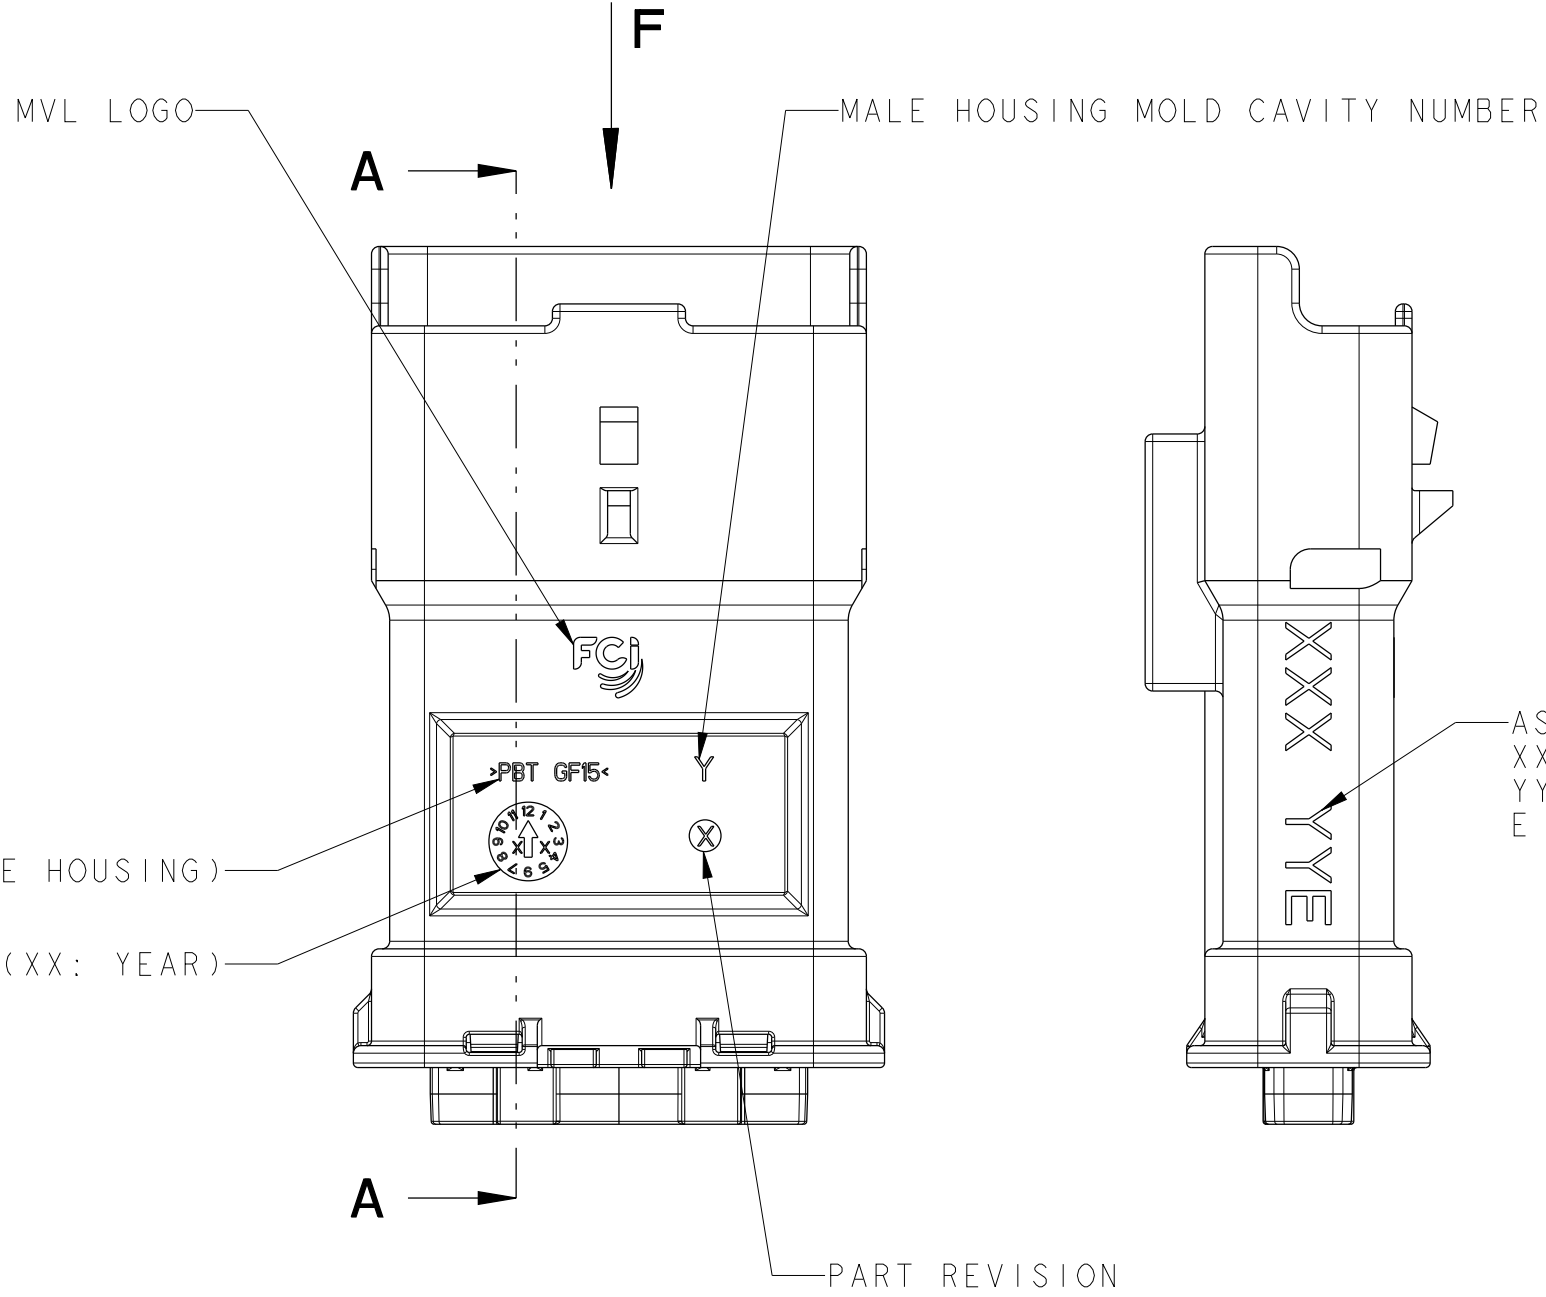
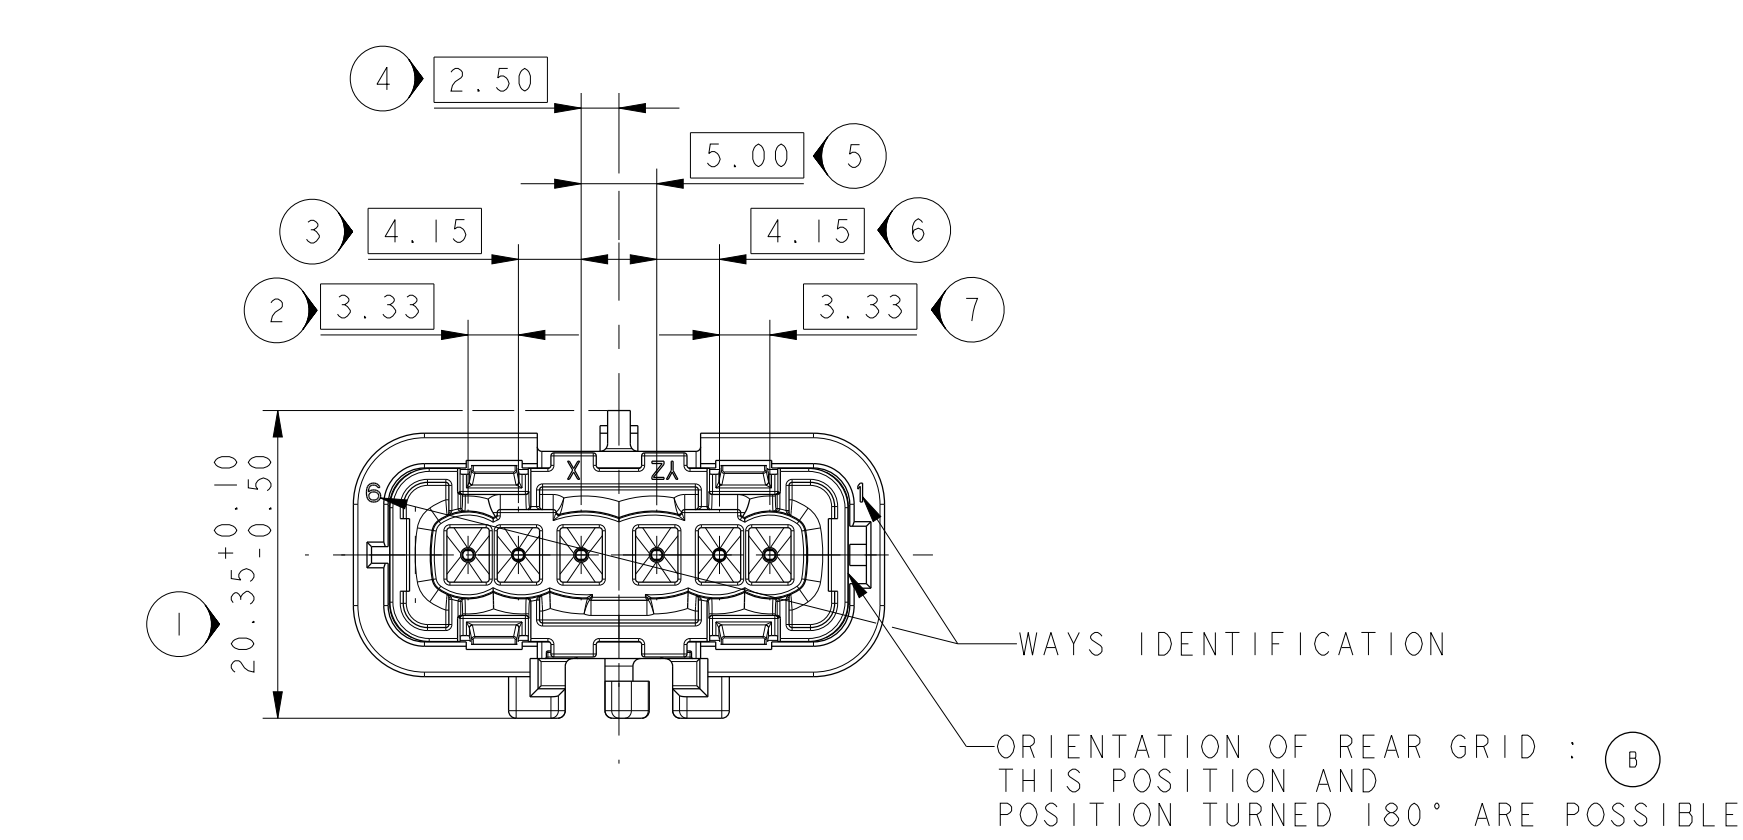



NOTE	SPECIFICATIONS
1	USER'S MANUAL MVL'S REFERENCE: PUI64 - ASSOCIATED PRODUCTS (CONTACT, PLUG,...) ARE DEFINED IN THE USER'S MANUAL
2	WIRE INSULATION DIAMETER :MINI=1.25 :MAXI=2.80
3	DELIVERED CONNECTOR WEIGHT : 15g
4	FEMALE/MALE CONNECTOR MATING FORCE F 75 N
5	COMPATIBLE WITH CONNECTOR DRAWING PCC0816827

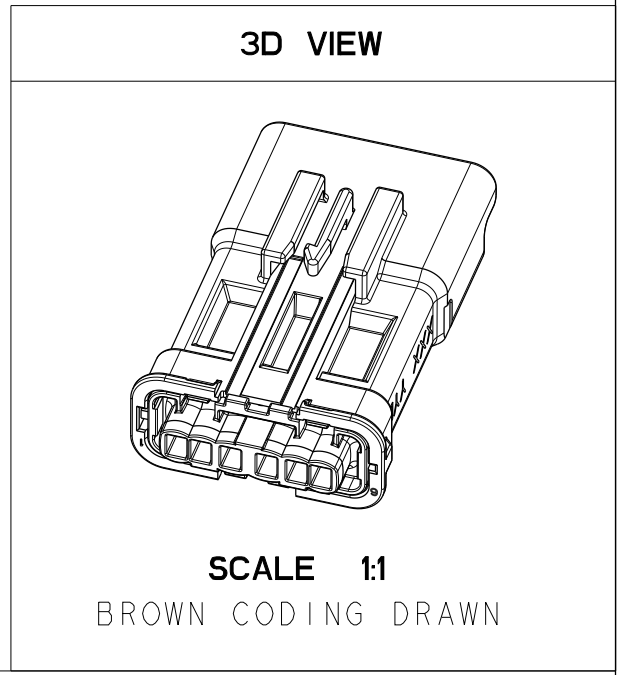

MALE HOUSING	S873700	-	PBT GF15	YELLOW
	S973700	-		GREEN
	S083700	-		BROWN
	S183700	-		RED
	S283700	-		PURPLE
TPA	S514700	-	PBT GF15	YELLOW
MAT SEAL	S693700	33501745	SILICONE	GREY
REAR GRID	S583700	33512023	PBT GF15	BLACK
DESCRIPTION	MVL'S SERIAL REF.	DELPHI'S SERIAL REF. ^(B)	MATERIAL	COLOUR

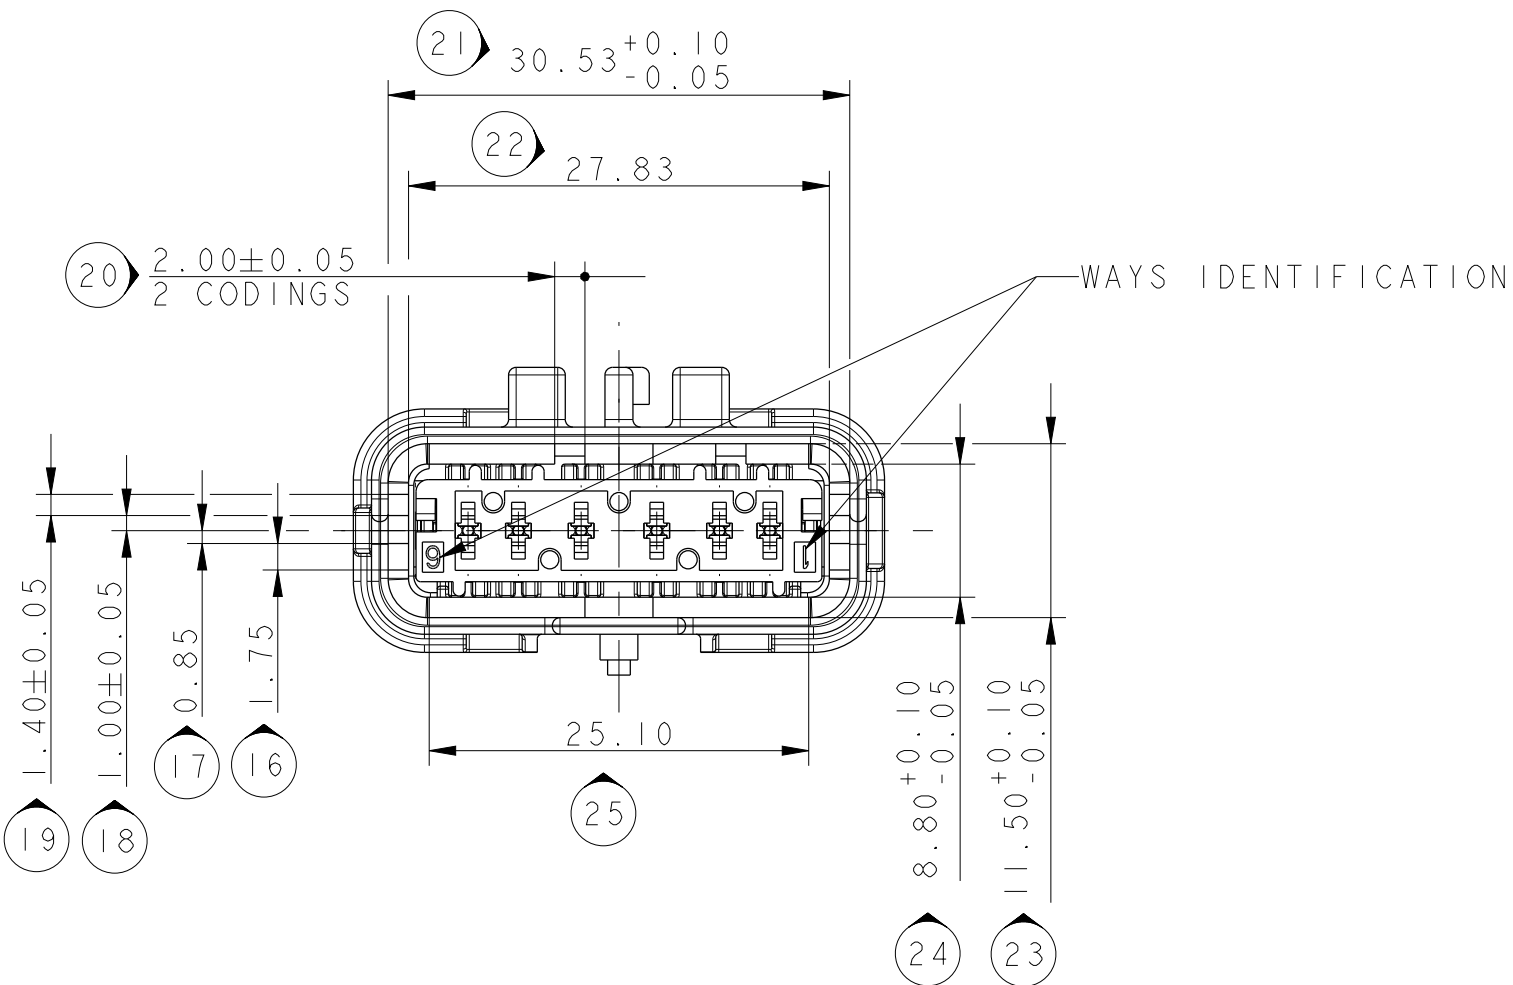

VIEW F TOLERANCES ±0.10 SCALE 1:1				
	RED	PURPLE	-	COLOUR CODING
	F953700	F063700	-	PART NUMBER
	A	A	-	PART REVISION
VIEW F TOLERANCES ±0.10 SCALE 1:1				
	BROWN	GREEN	YELLOW	COLOUR CODING
	F153700	F253700	F353700	PART NUMBER
	A	A	A	PART REVISION
VIEW F TOLERANCES ±0.10 SCALE 1:1				
	RED	PURPLE	BROWN	COLOUR CODING
	F953700	F063700	F353700	PART NUMBER
	A	A	A	PART REVISION

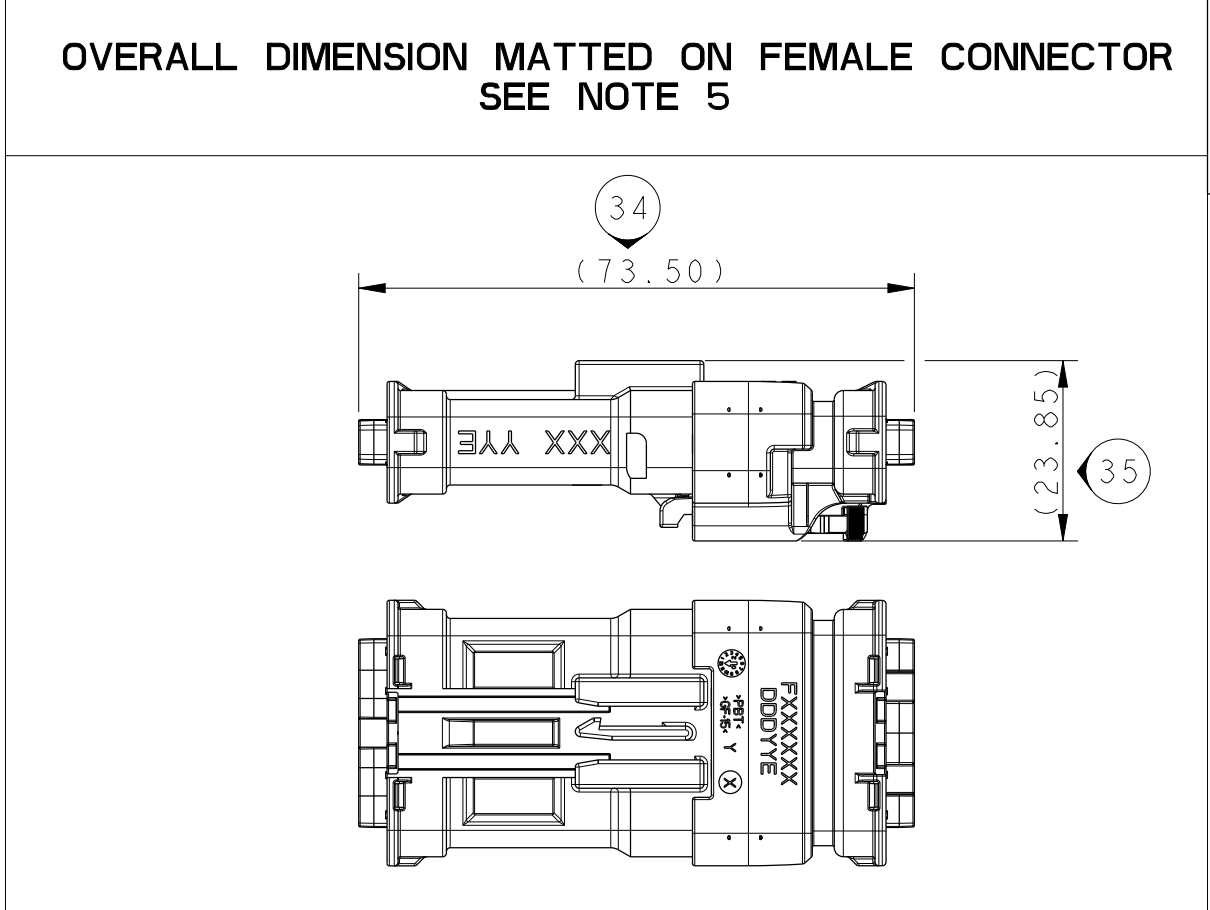

ECR 13-363	EF 14-15	DELPHI REFERENCE ADDED IN THE TABLE
L 7-9	NOTE ADDED FOR REAR GRID	
	KEYS OF POLARIZATION OF REAR GRID ARE SUPPRESSED	
ECN: NO. NUMERO ECN	POSITION	CHANGE DESCRIPTION
PRODUCT SPEC. SPECIF. PRODUIT	PACKAGING SPEC. SPECIF. EMBALLAGE	APPLICATION SPEC. SPECIF. APPLICATION
TOLERANCES TOLERANCES	±0.1	±2*
COUNTERPART N° CONTRE PARTIE N°	MATERIAL MATERIE	SEE TABLE
DO NOT MEASURE DRAWING NE PAS PRENDRE DE COTES	COLOR COULEUR	SEE TABLE
CREATED BY CREEE PAR	DATE	NAME NOM
MODIFIED BY MODIFIE PAR	DATE	NAME NOM
CHECKED BY VERIFIE PAR	DATE	NAME NOM
APPROVED BY APPREVE PAR	DATE	NAME NOM
FILE NAME NOM DE FICHIER	PCC0816887	
DESIGNATION	6-WAY MALE SEALED CONNECTOR	
STATE ETAT	SENOMATE SICMA 15	
PART NUMBER REF. ARTICLE	PCC0816887	
REV.	IND.	
APPROVAL LEVEL NIV. D'APPROBATION	B	
SHEET FEUILLE	1	
of sur	1	
SCALE ECH.	2:1	