SYMBOL DEFINITION			MISSING SYMBOLS
A DIMENSION WITHOUT AN INSPECTION REPORT SYMBOL [ ] DOES NOT REQUIRE INSPECTION. IT MAY BE CONTROLLED ON THE INDIVIDUAL COMPONENT DRAWING.	TOTAL NO OF INSPECTIONS REQUIRED	102	NO MISSING SYMBOL NUMBER
	LAST NO. USED	56	

DWG STATUS DATE	STS	REC	N/P	DIB	ZONE	REVISION HISTORY	AUTH	DR	APVD/APVD 1	2
16APR02	R	03	-	-		CLEARED REV COL: ALL PARTS - REVISED COLUMN	229963	LEO	DEO	JH
23APR02	R	04	-	-		ALL PARTS - DIM 78.4 +0.4/-0.8 WAS 78.4 & ADDED NOTES 12 PLUS!	224430	RVP	RVP	JH
29APR05	R	15	-	-		ALL PARTS - UPDATED PDM ATTRIBUTES	265890	ADK	ADK	BS
07SEP07	R	16	-	-		ALL PARTS - UPDATED PDM ATTRIBUTES	432336	MAK	TLO	WTM
11APR13	R	07	-	-		ALL PARTS - UPDATED RECYCLING CODE NOTE	422689	JAY	TLO	JAY

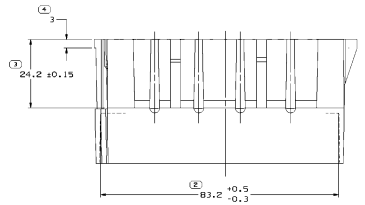





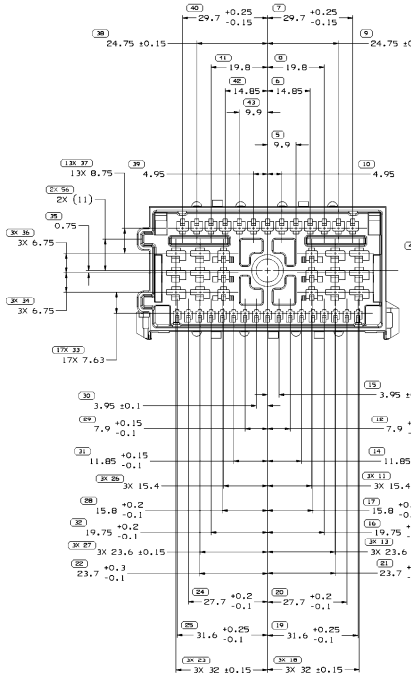





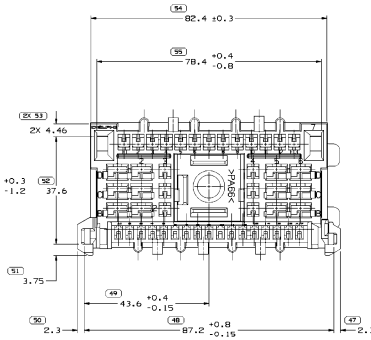

NOTES

1. UNLESS OTHERWISE SPECIFIED AND/OR INDICATED:

   DIMENSIONS ARE TO FACE OF VIEW SHOWN AND AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION (SEE MATH MODEL FOR PRECISE DIMENSIONS). FOR ALL OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA.

2. MATERIAL RECYCLING CODE PER ISO 11469. (2,3)X(0.1) CHARACTERS AS SHOWN TO BE LOCATED ON ANY EXTERIOR SURFACE. OPTIONAL CONSTRUCTION TO BE NO MATERIAL RECYCLING CODE.

3. THIS PART IS CONTROLLED FOR AUTOMATIC FEEDING AS DENOTED ON DRAWING WITH ▲.

4. (2,3)X(0.1) DELPHI CORPORATE BRAND TO BE LOCATED ON ANY EXTERIOR SURFACE, PREFERABLY VISIBLE AT FINAL ASSEMBLY. OPTIONAL CONSTRUCTION FOR EXISTING TOOLING MAY BE "PED".

5. FOR APPLICATION DATA SEE THE INDIVIDUAL APPLICATION DRAWINGS.

6. THIS PRODUCT IS NOT CATEGORIZED AS AN APPEARANCE ITEM. MINOR IMPERFECTIONS INCLUDING, BUT NOT LIMITED TO, FLOW MARKS, COLOR BLEMISHES, GATE VESTIGE, AND SOFT FLASH THAT DO NOT AFFECT THE FIT, FORM, OR FUNCTION OF THE PART ARE PERMISSIBLE PER NAP 4.1.0-18.

PART NO	REV	N/P	MATERIAL SPECIFICATION AND COLOR	VOLUME CM³
12084132	07	AF	POLYAMIDE COMPOUND GRAY	50.671
12066326	07	AF	POLYAMIDE COMPOUND BLACK	50.671

(46) PROCESS INSPECTION DIMENSION
DIMENSIONS ENCLOSED IN ( ) INDICATE PROCESS INSPECTION DIMENSIONS WITH NO TOLERANCE LIMITS ARE ESTABLISHED.

REFERENCE

ATMOSPHERICAL MOLDING SPACE

FROM	0	25	75	150	200	250	300	350	400
TO	25	75	150	200	250	300	350	400	

TOLERANCE DEVIATIONS SPECIFIED

| | | | | | | | | |