

LUMIPLUS ESSENTIAL MINI PROJECTOR FOR NICHE


Niche mounted. Compatible with Astralpool's Mini niches .



A ↑ E		76680	76680WW
	Color	White	Warm White
	Consumption	4 W (6 VA)	
	Luminous flux	315 lm	
	Temp. Color	5.700 K	3.000 K

A ↑ G		76682
	Color	RGB
	Consumption	4 W (7 VA)
	Luminous flux	186 lm
	Remote Control	Not included
Control	Can be controlled by push-button 32458, LumiPlus Range Extender 64633 + RC1100 remote controller 75773 or LumiPlus Connect controller 76290.	

VOLTAGE:	12 V AC
FREQUENCY:	50/60 Hz
SERVICE LIFE:	L70-50,000 h
MAX. WATER TEMPERATURE:	40 °C
MAX. INSTALLATION DEPTH:	2 m
MAXIMUM WATER TREATMENT VALUES:	Chlorine: 2 mg/l Bromine: 5 mg/l Salt chlorinator (NaCl): 6 g/l Pool water pH: 7.2 and 7.6
CABLE:	2.5 m. H07RN-F 2 x 1 mm ²
MATERIALS:	Polyamide
NICHES:	06967, 00369, 49828
DECORATIVE RINGS:	Beige: 77329CL090 Grey: 77329CL129 Anthracite: 77329CL144

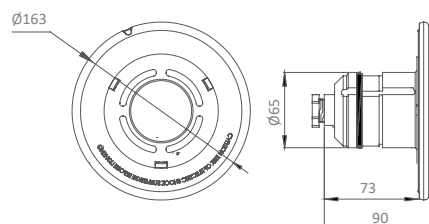

PACKAGING AND PALLETIZATION

Volume/Single box (m ³)	0,003
Weight/Single box (kg)	0,75
Units/Standard box	4
Volume/Standard box (m ³)	0,026
Weight/Standard box (kg)	3,50
Units/Pallet	192
Volume/Pallet (m ³)	2,30
Weight/Pallet (kg)	200

SINGLE BOX



MULTIPLE BOX

