

LUMIPLUS ESSENTIAL RAPID PROJECTOR


Nozzle mounted projector. For fiberglass or liner pools installation.



		64339		64339WW	
	Color	White		Warm White	
	Power	14,5 W (20 VA)			
	Luminous flux	1.485 lm			
	Temp. Color	5.700 K		3.000 K	
	Nozzle	Included	Not included	Included	Not included

		64340		64341	65307
	Color	RGB RC1100			
	Power	22 W (29 VA)			
	Luminous flux	1.100 lm			
	Remote Control	Not included		Not included	Included
	Control	Can be controlled by push-button 32458, LumiPlus Range Extender 64633 + RC1100 remote controller 75773 or LumiPlus Connect controller 76290.		Works with remote control 75773.	

VOLTAGE:	12 V AC
FREQUENCY:	50/60 Hz
SERVICE LIFE:	L70-50,000 h
MAX. WATER TEMPERATURE:	40 °C
MAX. INSTALLATION DEPTH:	2 m
MAXIMUM WATER TREATMENT VALUES:	
	Chlorine: 2 mg/l Bromine: 5 mg/l
	Salt chlorinator (NaCl): 6 g/l
	Pool water pH: 7.2 and 7.6
CABLE:	2.5 m. H07RN-F 2 x 1 mm ²
MATERIALS:	Polyamide
DECORATIVE RINGS:	Beige: 77327CL090
	Grey: 77327CL129
	Anthracite: 77327CL144

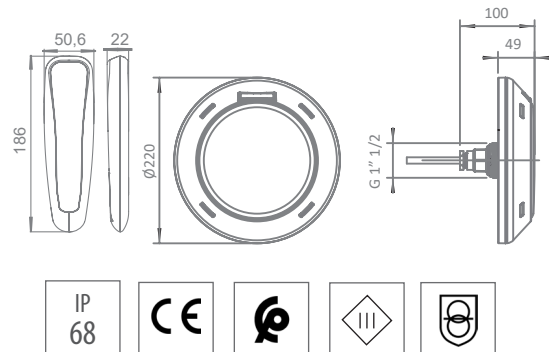

PACKAGING AND PALLETIZATION

Volume/Single box (m ³)	0,005
Weight/Single box (kg)	2,28
Units/Standard box	6
Volume/Standard box (m ³)	0,033
Weight/Standard box (kg)	13,68
Units/Pallet	336
Volume/Pallet (m ³)	2,58
Weight/Pallet (kg)	824,88

SINGLE BOX



MULTIPLE BOX

