

RANGE SPECIFICATIONS

Models

| NAME | CLEAR CONNECT 7 | CLEAR CONNECT 7 SCALABLE | CLEAR CONNECT 12 | CLEAR CONNECT 12 SCALABLE | CLEAR CONNECT 21 | CLEAR CONNECT 21 SCALABLE | CLEAR CONNECT 30 | CLEAR CONNECT 30 SCALABLE | CLEAR CONNECT 40 | CLEAR CONNECT 40 SCALABLE |
|-------------------|--------------------------------|--------------------------|-------------------|---------------------------|-------------------|---------------------------|--------------------|---------------------------|--------------------|---------------------------|
| Code | 76772 | 76775 | 76773 | 76776 | 76774 | 76777 | 77017 | 77019 | 77018 | 77020 |
| Chlorine output | 7 g/h | | 12 g/h | | 21 g/h | | 30 g/h | | 40 g/h | |
| Pool Volume | 30 m ³ | | 50 m ³ | | 90 m ³ | | 140 m ³ | | 180 m ³ | |
| Required salinity | 4,0 g/L (min. 3,5 max. 12,0) | | | | | | | | | |
| pH control | - | Optional CODE 76778 | - | Optional CODE 76778 | - | Optional CODE 76778 | - | Optional CODE 76778 | - | Optional CODE 76778 |
| ORP control | - | Optional CODE 76779 | - | Optional CODE 76779 | - | Optional CODE 76779 | - | Optional CODE 76779 | - | Optional CODE 76779 |
| Flow switch | Optional CODE 76780 | | | | | | | | | |

*Pool volume for a 28°C water. Volume +/-20% if water is colder or warmer.



Specifications

| | |
|--------------------------------|--|
| Salinity / Temperature reading | Yes / Yes |
| Polarity reversal | Yes (adjustable + test mode) |
| Boost mode / Cover mode | Yes (100% during 24h) / Yes (adjustable from 20 to 80%) |
| Flow detection | Yes (gas sensor, flow switch in option - code 76780) |
| IP rating | IPX4 |
| Connectivity / App control | Bluetooth & Wi-Fi with Fluidra Pool app control |
| Electrode lifespan | 8-10 000 h |
| pH dosing (optional) | Integrated peristaltic pump, 1,5L/h, with over-feed safety |
| pH & ORP sensors (optional) | Plastic body, diam. 12mm, platinum pH sensor / gold ORP sensor |

DIMENSIONS





CLEAR CONNECT

AGILE AND CONNECTED, QUITE SIMPLY!




CONNECTED, NO MATTER WHAT

For optimal control, all our models are equipped with Bluetooth and Wi-Fi connectivity.

The Fluidra Pool application lets you control all the settings remotely, 24 hours a day, for complete peace of mind.



Scan to learn more



BUILT TO LAST AND ADAPT TO EVERY SITUATION

Available in 3 power ratings, each in a standard or scalable version, Clear Connect can be adapted to suit any pool. The scalable version offers the option of adding pH and ORP control for complete water treatment.

Its cell is transparent, making it easy to check the condition of the high-durability electrode (between 8,000 and 10,000 hours).






EASY TO INSTALL, SIMPLE TO USE

Its compact, stylish casing can be easily installed in any type of pool pad. In the scalable version, the pH and ORP functions come pre-configured for faster installation of the optional kits.

The interface has been designed to provide key information at a glance, while the Fluidra Pool application makes advanced configuration easy thanks to its intuitive navigation.

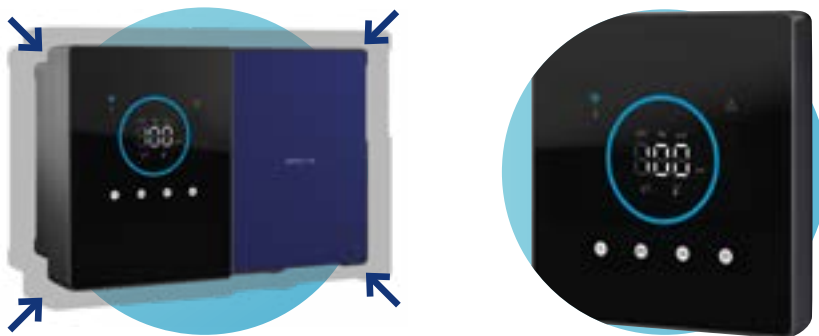

DESIGNED FOR OPTIMUM BATHING COMFORT

Salt electrolysis is a method of disinfecting pools that does not require the use of chemical disinfectants.

This more natural approach, with no odours or risk of irritation for bathers, guarantees healthy water that's better for the environment.

