

LUMIPLUS ESSENTIAL FLAT PROJECTOR


Surface mounted projector.



| A T E | | 75821 | 75821WW | |
|-------------|---------------|----------------|------------|--|
| | Color | White | Warm White | |
| | Consumption | 14,5 W (20 VA) | | |
| | Luminous flux | 1.485 lm | | |
| Temp. Color | 5.700 K | 3.000 K | | |

| A T G | | 75824 | 75825 | 75826 |
|-------------|---|--------------|----------------------------------|--------------|
| | Color | RGB | RGB RC1100 | |
| | Consumption | 22 W (29 VA) | | |
| | Luminous flux | 1.100 lm | | |
| | Remote Control | Not included | Included | Not included |
| Control | Can be controlled by push-button 32458, LumiPlus Range Extender 64633 + RC1100 remote controller 75773 or Lumi-Plus Connect controller 76290. | | Works with remote control 75773. | |

| | |
|---------------------------------|--|
| VOLTAGE: | 12 V AC |
| FREQUENCY: | 50/60 Hz |
| SERVICE LIFE: | L70-50,000 h |
| MAX. WATER TEMPERATURE: | 40 °C |
| MAX. INSTALLATION DEPTH: | 2 m |
| MAXIMUM WATER TREATMENT VALUES: | Chlorine: 2 mg/l Bromine: 5 mg/l Salt chlorinator (NaCl): 6 g/l Pool water pH: 7.2 and 7.6 |
| CABLE: | 2.5 m. H07RN-F 2 x 1 mm ² |
| MATERIALS: | Polyamide |

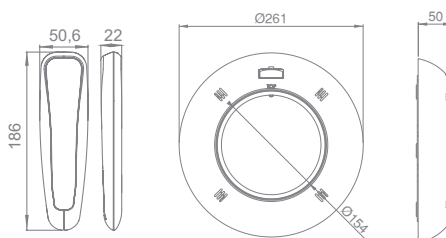

PACKAGING AND PALLETIZATION

| | |
|---------------------------------------|--------|
| Volume/Single box (m ³) | 0,005 |
| Weight/Single box (kg) | 2,28 |
| Units/Standard box | 6 |
| Volume/Standard box (m ³) | 0,033 |
| Weight/Standard box (kg) | 13,68 |
| Units/Pallet | 336 |
| Volume/Pallet (m ³) | 2,58 |
| Weight/Pallet (kg) | 824,88 |

