


► INSTALACIÓN CONEXIÓN EN **MODO A:**


Cada proyector se conecta individualmente a la salida del transformador

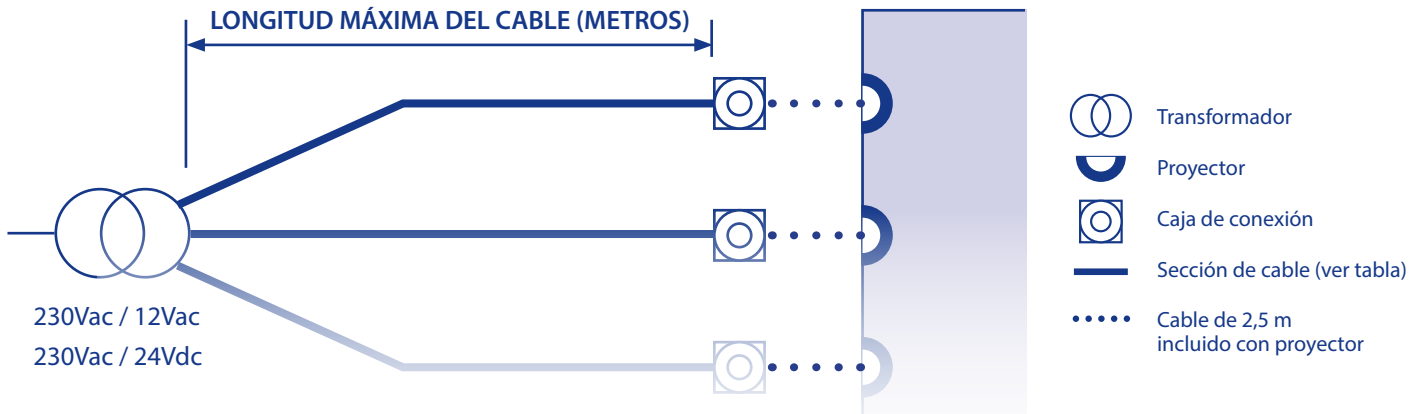

CÓDIGO			LONGITUD MÁXIMA DEL CABLE (METROS)					
			2x1,5 mm ²	2x2,5 mm ²	2x4 mm ²	2x6 mm ²	2x10 mm ²	2x16 mm ²
PAR56 - FLAT - RAPID	FLEXI	DESIGN						
	71236		119	219	-	-	-	-
76591M, 76592M, 76593M, 75767 75771, 75772, 76573, 76573WW	76579M, 76580M, 76581M		6	11	18	28	46	74
	76600, 76600WW, 76600TW, 76600M, 76600MW	59805, 59805WW, 59807, 59807WW	8	15	24	36	60	96
	76601, 76601WW, 76601TW, 76601MW		3	7	11	17	29	46
	76573, 76573WW	59801, 59803	7	13	21	31	52	84
75435, 75771, 75772, 75777, 75778, 75767, 75437, 75781, 75782, 75784, 75785, 75824, 75825, 75826, 62328, 62393, 64561, 64340, 65307, 64341			9	17	28	42	70	112
	71201, 71201WW		65	135	-	-	-	-
	71202, 71202WW		27	55	90	140	-	-
73761, 73761WW, 70870, 70870WW 66828, 66828WW, 70528, 70528WW,			14	26	42	63	105	165

► INSTALACIÓN CONEXIÓN EN **MODO A:**


Cada proyector se conecta individualmente a la salida del transformador

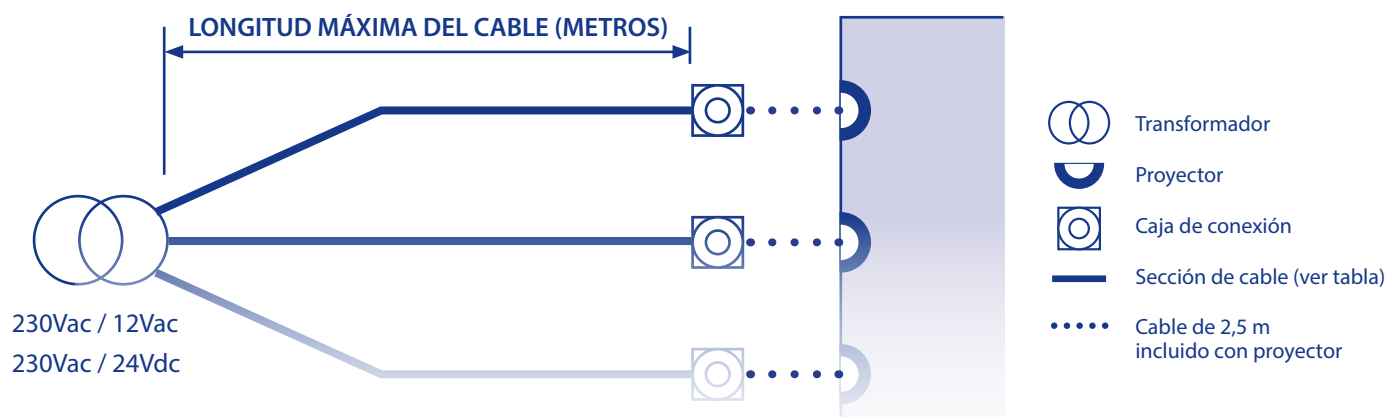

CÓDIGO		LONGITUD MÁXIMA DEL CABLE (METROS)				
		2x1,5mm ²	2x2,5mm ²	2x4mm ²	2x6mm ²	2x10mm ²
FLEXI MINI	MINI					
74400, 74400WW, 76588M, 76602M	52131, 52131WW, 52132, 52132WW, 76680, 76680WW, 76681, 76681WW	47	88	140	-	-
74401, 74401WW		150	-	-	-	-
74406, 74406WW		27	49	79	119	-
74407, 74407WW		153	-	-	-	-
76589M, 76590M		23	43	70	105	-
76602, 76602WW, 76602TW		62	115	-	-	-
76602MW		37	69	111	-	-
76603, 76603WW, 76603TW		27	49	79	119	-
76603MW		19	35	56	84	141
	52126, 52127 76682, 76683	34	68	109	-	-

► INSTALACIÓN CONEXIÓN EN **MODO B:**


Un único cable principal alimenta a más de un proyector

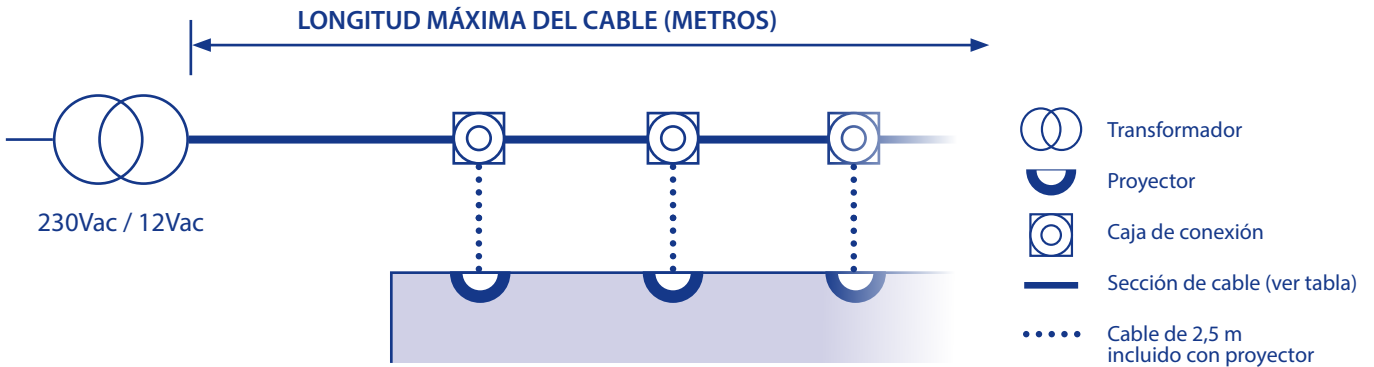

CÓDIGO			CANT. PROY.	LONGITUD MÁXIMA DEL CABLE (METROS)						
				2x1,5 mm ²	2x2,5 mm ²	2x4 mm ²	2x6 mm ²	2x10 mm ²	2x16 mm ²	
PAR56 - FLAT - RAPID	FLEXI	DESIGN								
	71236		2	58	108	-	-	-	-	
			3	39	72	114		-	-	
			4	29	54	87	130	-	-	
76591M, 76592M, 76593M, 75767, 75771, 75772, 76573, 76573WW	76579M, 76580M, 76581M		2	3	5	9	13	25	37	
			3	-	3	7	9	15	26	
			4	-	-	3	6	11	18	
	76600, 76600WW, 76600TW, 76600M, 76600MW	59805, 59805WW, 59807, 59807WW	2	3	6	11	16	27	44	
			3	-	4	7	10	19	29	
			4	-	3	5	8	14	22	
	76601, 76601WW, 76601TW, 76601MW		2		3	5	8	14	23	
			3			3	5	9	15	
			4				4	7	11	
	76573, 76573WW	59801, 59803	2	3	6	10	15	26	42	
			3		4	6	10	17	28	
			4		3	5	7	13	20	
75435, 75771, 75772, 75777, 75778, 75767, 75437, 75781, 75782, 75784, 75785, 75824, 75825, 75826, 62328, 62393, 64561, 64340, 65307, 64341			2	4	9	14	21	36	58	
			3	3	5	9	14	24	38	
			4	-	3	7	10	18	29	
	71201, 71201WW1		2	34	68	109	163	-	-	
			3	22	45	72	108	-	-	
			4	17	34	54	82	137	-	
	71202, 71202WW		2	15	30	48	72	121	-	
			3	9	19	31	47	78	126	
			4	7	14	23	35	59	95	
73761, 73761WW, 70870, 70870WW, 66828, 66828WW, 70528, 70528WW,			2	6	12	20	30	50	80	
			3	4	8	13	21	35	56	
			4	3	6	10	15	26	42	

► INSTALACIÓN CONEXIÓN EN **MODO B:**

Un único cable principal alimenta a más de un proyector

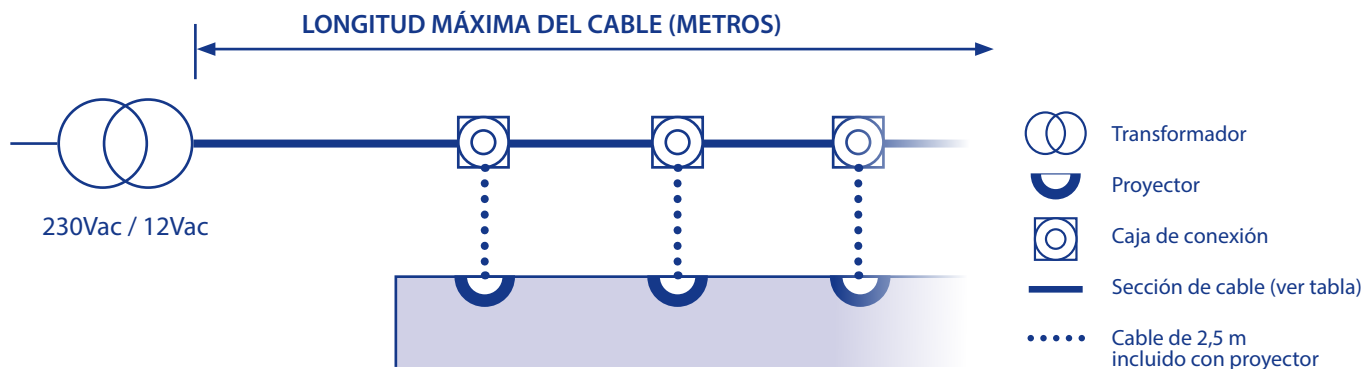

CÓDIGO		CANT. PROY.	LONGITUD MÁXIMA DEL CABLE (METROS)						
			2x1,5 mm ²	2x2,5 mm ²	2x4 mm ²	2x6 mm ²	2x10 mm ²	2x16 mm ²	
FLEXI MINI	MINI								
74400, 74400WW, 76588M, 76602M	52131, 52131WW, 52132, 52132WW, 76680, 76680WW, 76681, 76681WW	2	23	43	70	105	-	-	
		3	15	29	46	70	117	-	
		4	11	21	35	52	87	140	
74401, 74401WW		2	75	130	210	-	-	-	
		3	50	87	140	-	-	-	
		4	38	65	105	-	-	-	
74406, 74406WW		2	15	25	40	60	100	-	
		3	10	17	27	40	68	105	
		4	7	13	20	30	50	80	
74407, 74407WW		2	65	135	-	-	-	-	
		3	44	90	-	-	-	-	
		4	33	68	108	-	-	-	
76589M, 76590M		2	11	21	35	52	87	140	
		3	7	14	23	35	58	93	
		4	5	10	17	26	43	70	
76602, 76602WW, 76602TW		2	31	58	93	140	-	-	
		3	21	38	62	93	155	-	
		4	15	29	46	70	117	-	
76602MW		2	19	35	56	84	141	-	
		3	12	23	37	56	93	149	
		4	9	17	28	42	70	112	
76603, 76603WW, 76603TW		2	13	25	40	60	100	-	
		3	9	16	26	40	66	106	
		4	6	12	20	30	50	80	
76603MW		2	9	17	28	42	70	112	
		3	6	11	18	28	46	74	
		4	4	8	13	21	35	56	
	52126, 52127 76682, 76683	2	17	34	54	82	137	-	
		3	11	22	36	54	90	144	
		4	8	17	27	41	68	109	