

# ENERGY CONNECT

AGILE AND CONNECTED, QUITE SIMPLY!



## CONNECTED, NO MATTER WHAT

---

For optimal control, all our models are equipped with Bluetooth and Wi-Fi connectivity.

The Fluidra Pool application lets you control all the settings remotely, 24 hours a day, for complete peace of mind.



Scan to learn more



## BUILT TO LAST AND ADAPT TO EVERY SITUATION

---

Available in 3 power ratings, each in a standard or scalable version, Energy Connect can be adapted to suit any pool. The scalable version offers the option of adding pH and ORP control for complete water treatment.

Its cell is transparent, making it easy to check the condition of the high-durability electrode (between 8,000 and 10,000 hours).






## EASY TO INSTALL, SIMPLE TO USE

---

**Its compact, stylish casing can be easily installed in any type of pool pad. In the scalable version, the pH and ORP functions come pre-configured for faster installation of the optional kits.**

The interface has been designed to provide key information at a glance, while the Fluidra Pool application makes advanced configuration easy thanks to its intuitive navigation.

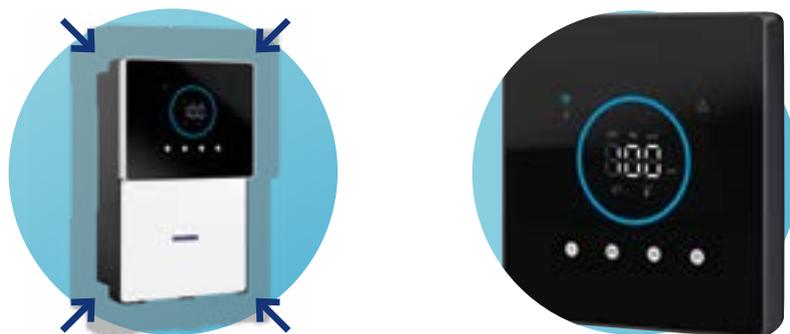

## DESIGNED FOR OPTIMUM BATHING COMFORT

---

**Salt electrolysis is a method of disinfecting pools that does not require the use of chemical disinfectants.**

This more natural approach, with no odours or risk of irritation for bathers, guarantees healthy water that's better for the environment.



# RANGE SPECIFICATIONS

## Models

NAME	ENERGY CONNECT 7	ENERGY CONNECT 7 SCALABLE	ENERGY CONNECT 12	ENERGY CONNECT 12 SCALABLE	ENERGY CONNECT 21	ENERGY CONNECT 21 SCALABLE	ENERGY CONNECT 30	ENERGY CONNECT 30 SCALABLE	ENERGY CONNECT 40	ENERGY CONNECT 40 SCALABLE
Code	76766	76769	76767	76770	76768	76771	77013	77015	77014	77016
Chlorine output	7 g/h		12 g/h		21 g/h		30 g/h		40 g/h	
Pool Volume	30 m <sup>3</sup>		50 m <sup>3</sup>		90 m <sup>3</sup>		140 m <sup>3</sup>		180 m <sup>3</sup>	
Required salinity	4,0 g/L (min. 3,5   max. 12,0)									
pH control	-	Optional CODE 76778	-	Optional CODE 76778	-	Optional CODE 76778	-	Optional CODE 76778	-	Optional CODE 76778
ORP control	-	Optional CODE 76779	-	Optional CODE 76779	-	Optional CODE 76779	-	Optional CODE 76779	-	Optional CODE 76779
Flow switch	Optional CODE 76780									

\*Pool volume for a 28°C water. Volume +/-20% if water is colder or warmer.



## Specifications

Salinity / Temperature reading	Yes / Yes
Polarity reversal	Yes (adjustable + test mode)
Boost mode / Cover mode	Yes (100% during 24h) / Yes (adjustable from 20 to 80%)
Flow detection	Yes (gas sensor, flow switch in option - code 76780)
IP rating	IPX4
Connectivity / App control	Bluetooth & Wi-Fi with Fluidra Pool app control
Electrode lifespan	8-10 000 h
pH dosing (optional)	Integrated peristaltic pump, 1,5L/h, with over-feed safety
pH & ORP sensors (optional)	Plastic body, diam. 12mm, platinum pH sensor / gold ORP sensor

## DIMENSIONS

