


# alpine filter

standard deep bed laminated sand filter

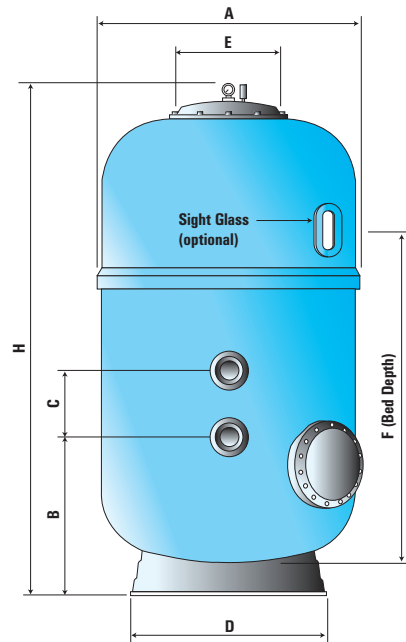

## Dimensions

Code	A mm	B mm	C mm	D mm	E mm	F mm	H mm	W kg	Sand kg	Gravel 6mm (kg)
ZZFAHL650L	680	720	125	490	200	1000	1705	85	380	100
ZZFAHL650N	680	720	125	490	200	1000	1705	85	380	50
ZZFAHL800L	825	685	230	625	200	1000	1750	115	530	165
ZZFAHL800N	825	685	230	625	200	1000	1750	115	530	70
ZZFAHL950L	970	685	270	705	200	1000	1760	140	830	260
ZZFAHL950N	970	685	270	705	200	1000	1760	140	830	100
ZZFAHLI1050L	1090	630	270	775	400	1000	1895	180	1015	320
ZZFAHLI1050N	1090	630	270	775	400	1000	1895	180	1015	120
ZZFAHLI200L	1255	665	270	940	400	1000	1970	210	1360	410
ZZFAHLI200N	1255	665	270	940	400	1000	1970	210	1360	160

## Multiport Valves

Code	Description
MPV15MAX	1.5" multiport valve
MPV20MAX	2" multiport valve
MPV25MAX	2.5" multiport valve
MPV30MAX	3" multiport valve



## Alpine Standard Filter

The Alpine Standard is a laminated polyester filter with a 1.0 metre bed depth.

Available with a lateral underdrain system or nozzle plate option.

## Technical Data

1.0 metre media bed depth  
2.5 bar max operating pressure  
3.75 bar max test pressure  
50°C max working temperature

## Options

- Sight glass
- Ø400mm service hatch on 1050 & 1200 models
- For ozone treatment, filter with an internal vinyl ester coating are required.

## Standard Features - Alpine

- Bolt down lid
- Ø200mm media service hatch as standard (Ø400mm available on 050 and 1200 models)
- Manual air and water purge
- Top mounted pressure gauge
- Internal pipework is supported to provide stability during operation
- Reinforced base for extra strength under loading
- Multiport valve included (1050 & 1200 models is valve only)

# heavy duty edition 3



commercial



design



performance

