




LumiPlus Flexi Plug&Play projector

LumiPlus Plug&Play offer the easiest and most enjoyable way to illuminate your pool in full multicolor. All you need is a Plug&Play lamp and a Plug&Play remote control to choose between 12 different colours, 8 colour changing sequences, 8 colour changing speeds and the brightness level.

LumiPlus Flexi projectors are underwater floodlights made up of two components: a **lamp** and a **decorative ring**. Flexi projectors can be installed into a niche, a surface mounted or a nozzle.

MADE UP OF TWO COMPONENTS:

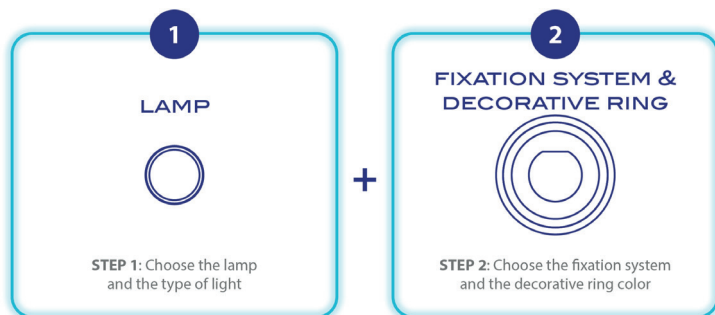

TECNICAL SPECIFICATIONS


VOLTAGE:	12 V AC
FREQUENCY:	50/60 Hz
SERVICE LIFE:	L70-50,000 h
MAX. WATER TEMPERATURE:	40 °C
MAX. INSTALLATION DEPTH:	2 m
MAXIMUM WATER TREATMENT VALUES:	Chlorine: 2 mg/l Bromine: 5 mg/l Salt chlorinator (NaCl): 6 g/l Pool water pH: 7.2 and 7.6
CABLE:	2.5 m. H07RN-F 2 x 1 mm ²
	Cables from 5 to 30 meters long are available (see codes).
MATERIALS:	Polyamide



1 LAMP




DIMENSIONS

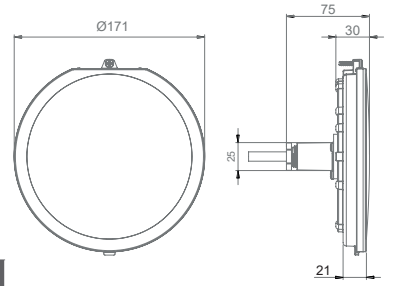

*measurements in mm.

	76579M	76580M	76581M
DESCRIPCIÓN	LAMP	KIT LAMP + REMOTE CONTROL	KIT 2 LAMP + REMOTE CONTROL
TYPE OF LIGHT	RGB	RGB	RGB
VOLTAGE	12V AC	12V AC	12V AC
POWER	34,5 W	34,5 W	34,5 W
CONSUMPTION	45 VA	45 VA	45 VA
LUMINOUS FLUX	2000 lm	2000 lm	2000 lm
FLUX ANGLE	100°	100°	100°
TERMAL PROTECTION	Self-regulation	Self-regulation	Self-regulation
ENERGY CLASS <small>Según UE 2019/2015</small>			
INSTALLATION IN SALT WATER	Yes	Yes	Yes
COMPATIBLE CONTROL SYSTEMS	PLUG&PLAY (74399)	PLUG&PLAY (74399 - included)	PLUG&PLAY (74399 - included)

PHOTOMETRY

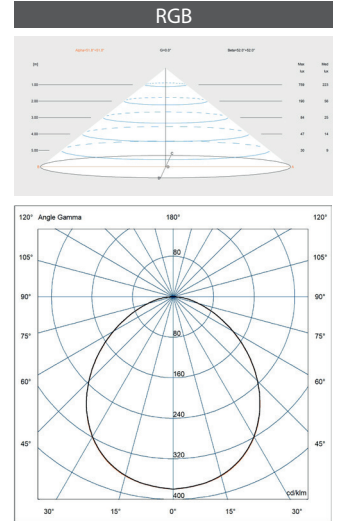

2 FIXATION SYSTEM & DECORATIVE RING

DECORATIVE RING FOR NICHE



DECORATIVE RING FOR SURFACE




DECORATIVE RING FOR NOZZLE



	White	Beige	Light gray	Anthracite gray	Stainless steel * AISI 316	How to install
71209	71209CL090	71209CL129	71209CL144	71209CLSS		
71210	71210CL090	71210CL129	71210CL144	-		
71211	71211CL090	71211CL129	71211CL144	-		

DIMENSIONS OF FIXATION SYSTEM & DECORATIVE RING

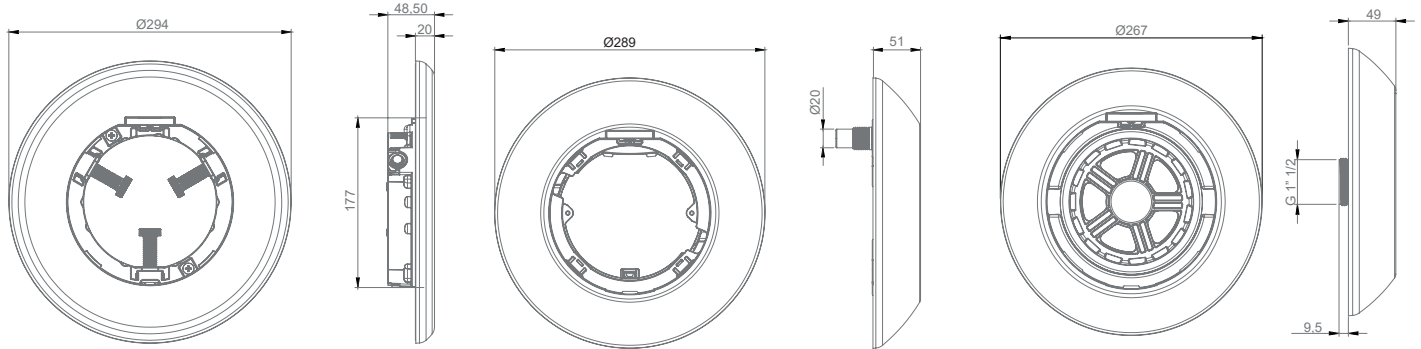

*measurements in mm.

FLEXINICHE (71209) : fits in any niche with an internal diameter between 180 and 230 mm.

FLEXILIM (71210) : can be surface-mounted on new pools or clipped to the existing AstralPool's surface fittings.

FLEXIRAPID (71211) : compatible with any 1½" internal thread nozzle.

1 + 2 KITS FLEXINICHE - FLEXILIM - FLEXIRAPID



	76582M, 76584M, 76586M	76583M, 76575M, 76587M
DETAILS	KIT FLEXI	KIT FLEXI + REMOTE CONTROL
TYPE OF LIGHT	RGB	RGB
VOLTAGE	12V AC	12V AC
POWER	34,5 W	34,5 W
CONSUMPTION	45 VA	45 VA
LUMINOUS FLUX	2000 lm	2000 lm
FLUX ANGLE	100°	100°
TERMAL PROTECTION	Self-regulation	Self-regulation
ENERGY CLASS <small>Según UE 2019/2015</small>		
INSTALLATION IN SALT WATER	Yes	Yes
COMPATIBLE CONTROL SYSTEMS	PLUG&PLAY (74399)	PLUG&PLAY (74399 - included)


INSTALLATION FITTINGS

SWIMMING POOL TYPE	FLEXINICHE FACEPLATE	FLEXISLIM FACEPLATE	FLEXIRAPID* FACEPLATE
CONCRETE	00349, 5410, 59813	✓	35418
CONCRETE + LINER	17805, 54103, 59814 59815, 72261	59983	06544, 17382, 59983
PANELS	23670, 23671	✓	00332, 27084
POLYESTER	00364, 28887, 54103 59814, 59815, 72261	✓	74179

* Compatible with any 1½" internal thread nozzle.

PACKAGING AND PALLETIZATION


SINGLE BOX

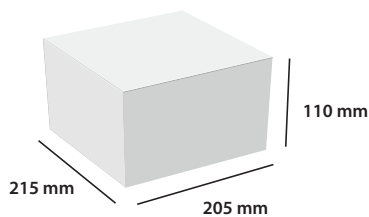

FIXATION SYSTEM & DECORATIVE RING



STANDARD BOX

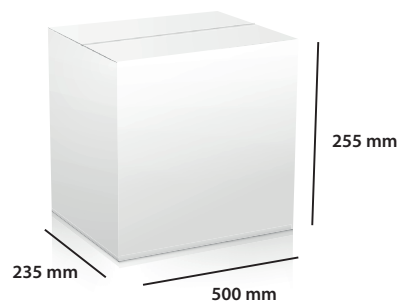

Code	76597M	76580M	76581M	76582M, 76583M 76584M, 76585M 76586M, 76587M
Single box size (mm)	215 x 205 x 110	225 x 245 x 110	215 x 430 x 110	340 x 115x 315
Volume / Single box (m ³)	0,005	0,006	0,010	0,012
Weight / Single box (Kg)	0,73	0,89	1,43	1,33
Units / Standard box	4	4	2	5
Volume / Standard box (m ³)	0,03			0,06
Peso / Standard box (Kg)	3,42	4,11	3,41	7,15
Units / Pallet	224		112	150
Volume / Pallet (m ³)	2,16			2,52
Weight / Pallet (Kg)	206,52	245,16	124,12	234,50