
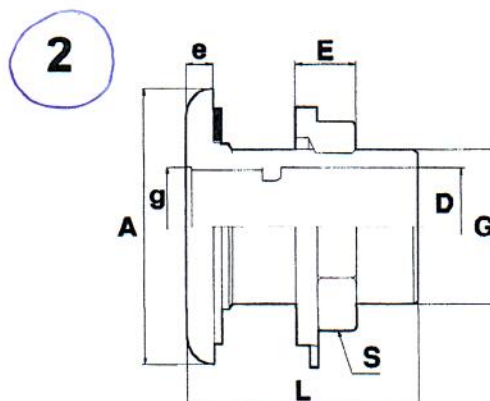
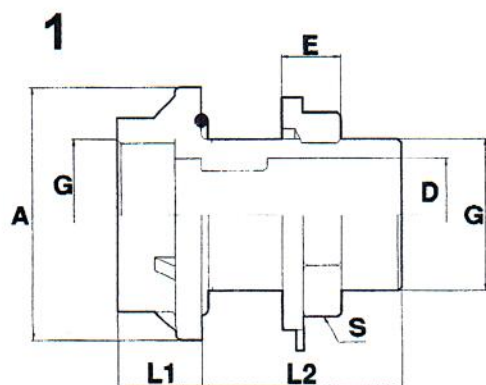


Material del racord	PPG
Dimensiones	DN15 à DN80
Estanqueidad por juntas	EPDM, FKM
Apriete	Por tuerca 6 caras
Temperatura maxi admisible	+110°C
Temperatura mini admisible	-10°C
Tipo de racordaje	Rosca macho gas x rosca hembra reducida

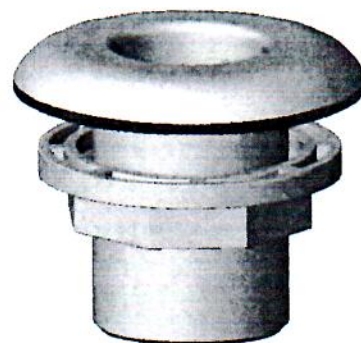

(1)

DN mm	Ød mm	G	PN	ØA mm	ØD mm	L1 mm	L2 mm	E mm	S mm	éspesor mm	Ø perforación mm	Peso en grs	Réf. de cde PPG/EPDM	Réf. de cde PPG/FKM
15	20	½"	10	46	12	19	62	17	30	30	21	50	7225.746	7255.746
20	25	¾"	10	52	16	21	68	17	34	35	26,5	58	7225.747	7255.747
25	32	1"	10	65	22	23	76	18	45	35	33	100	7225.748	7255.748
32	40	1 ¼"	10	78	30	25	76	20	55	30	42	140	7225.749	7255.749
40	50	1 ½"	10	90	35	27	76	23	61	25	47,5	180	7225.750	7255.750
50	63	2"	10	106	45	31	76	23	72	23	59,5	250	7225.751	7255.751
80	90	3"	10	136	70	42	78,5	27	104	10	88	530	7225.753	7255.753

(2)

DN mm	G	PN	ØA mm	ØD mm	L mm	e mm	E mm	S mm	éspesor mm	Ø Perforación mm	Peso en grs	Réf. de cde PPG/EPDM	Réf. de cde PPG/FKM
15x10	½"x¾"	10	46	12	62	7	17	30	30	21	30	7225.786	7255.786
20x15	¾"x1 ½"	10	52	16	68	7	17	34	35	26,5	38	7225.787	7255.787
25x20	1"x1 ¼"	10	65	22	76	8	18	45	35	33	70	7225.788	7255.788
32x25	1 ¼"x1"	10	78	30	76	9	20	55	30	42	100	7225.789	7255.789
40x32	1 ½"x1 ¼"	10	90	35	76	10	23	61	25	47,5	140	7225.790	7255.790
50x40	2"x1 ½"	10	106	45	76	10	23	72	23	59,5	200	7225.791	7255.791
80x65	3"x2 ½"	10	136	70	78,5	11	27	104	10	88	470	7225.793	7255.793