



VIGO PRO MAX FILTER


- Laminated filter manufactured with polyester resin and fiberglass.
 - Excellent exterior finish in gelcoat.
 - Filter color: WHITE
 - 1/4" air drain
 - 2 1/2" sand drain
 - Maximum temperature: 50°C
 - Maximum pressure: 2.5 bar.
 - Connections adapted for 2" Besgo valve
-
- *Filtros laminados con resina de poliéster y fibra de vidrio.*
 - *Excelente acabado exterior en gelcoat.*
 - *Filtro color: BLANCO*
 - *Purga de aire de 1/4".*
 - *Descarga de arena de 2 1/2"*
 - *Máxima temperatura: 50°C.*
 - *Máxima presión: 2.5 bar.*
 - *Connexiones adaptadas para válvula Besgo 2"*

Tested according to...
Probado de acuerdo a ...

EN16713-1 ✓

FILTER DETAILS / DETALLES DEL FILTRO

1. Cone diffuser / Cono difusor
2. Fitted with 1" laterals / Equipado con brazos colectores 1"
3. Extra large transparent lid Ø285mm in polycarbonate / Tapa grande transparente Ø285mm de policarbonato

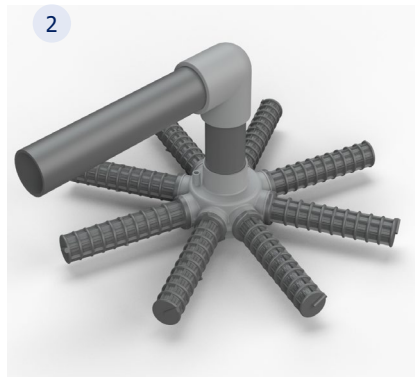

Code Código		77144-0100	77145-0100	77146-0100
Diameter Diámetro		500 mm	600 mm	750 mm
Connections Conexiones		63 mm / 2"	63 mm / 2"	63 mm / 2"
Filtration rate Vel. de filtración		50 m³/h/m²		
Filtration area Superficie de filtración		0.19 m²	0.30 m²	0.44 m²
Flow Caudal		9.5 m³/h	15 m³/h	22 m³/h
Max. Pressure Presión máx.		2.5 bar		
Granulometry Granulometría		0.4 – 0.8 mm		
Sand load Carga de arena		120 kg	190 kg	360 kg
Dimensions Dimensiones	H	920 mm	1000 mm	1057 mm
	M	230 mm	230 mm	230 mm
	N	310 mm	330 mm	310 mm
	a	560 mm	700 mm	800 mm
	b	560 mm	700 mm	800 mm
	c	890 mm	1050 mm	1130 mm
	d	1200 mm	1400 mm	800 mm
	e	1200 mm	1400 mm	800 mm
	f	1850 mm	1900 mm	2220 mm
Units per pallet Unidades por palé		8	8	2

