




LumiPlus FlexiMini Plug&Play projector

LumiPlus Plug&Play offer the easiest and most enjoyable way to illuminate your pool in full multicolor. All you need is a Plug&Play lamp and a Plug&Play remote control to choose between 12 different colours, 8 colour changing sequences, 8 colour changing speeds and the brightness level.

LumiPlus FlexiMini projectors are underwater floodlights made up of two components: a **lamp** and a **decorative ring**. FlexiMini projectors can be installed into a niche, a nozzle or for piping or wall bushing.

MADE UP OF TWO COMPONENTS:

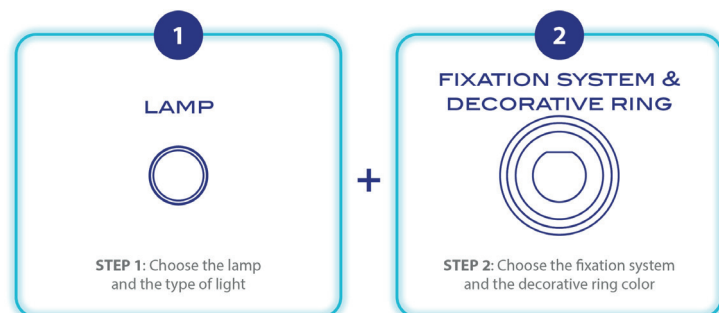

TECNICAL SPECIFICATIONS


VOLTAGE:	12 V AC
FREQUENCY:	50/60 Hz
SERVICE LIFE:	L70-50,000 h
MAX. WATER TEMPERATURE:	40 °C
MAX. INSTALLATION DEPTH:	2 m
MAXIMUM WATER TREATMENT VALUES:	Chlorine: 2 mg/l Bromine: 5 mg/l Salt chlorinator (NaCl): 6 g/l Pool water pH: 7.2 and 7.6
CABLE:	2.5 m. H07RN-F 2 x 1 mm ²
	Cables from 5 to 30 meters long are available (see codes).
MATERIALS:	Polyamide



1 LAMP




DIMENSIONS

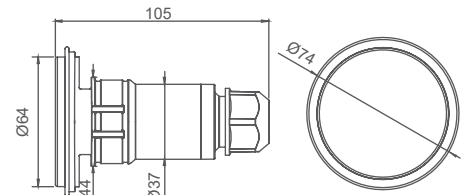


*measurements in mm.

	76588M	76589M	76590M
DESCRIPTION	FlexiMini Stairs	FlexiMini Wall	3 FlexiMini Wall + Remote Control
TYPE OF LIGHT	RGB	RGB	RGB
VOLTAGE	12V AC	12V AC	12V AC
POWER	4 W	8 W	8 W
CONSUMPTION	6 VA	12 VA	12 VA
LUMINOUS FLUX	300 lm	600 lm	600 lm
FLUX ANGLE	100°	100°	100°
TERMAL PROTECTION	Self-regulation	Self-regulation	Self-regulation
ENERGY CLASS <small>Según UE 2019/2015</small>			
INSTALLATION IN SALT WATER	Yes	Yes	Yes
COMPATIBLE CONTROL SYSTEMS	Plug&Play (74399)	Plug&Play (74399)	Plug&Play (74399 - included)

PHOTOMETRY STAIRS

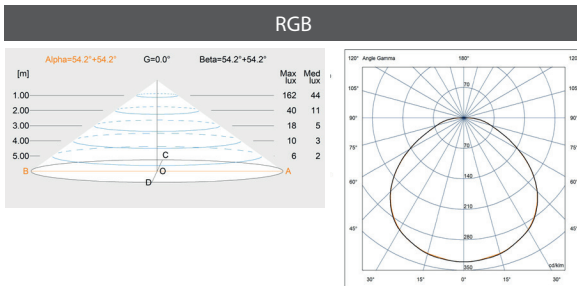

PHOTOMETRY WALL

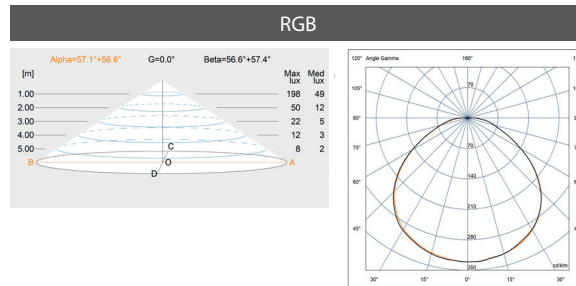

2 FIXATION SYSTEM & DECORATIVE RING

DECORATIVE RING FOR NICHE




DECORATIVE RING FOR NOZZLE L



DECORATIVE RING FOR NOZZLE S




DECORATIVE RING FOR PIPE




	White	Beige	Light gray	Anthracite gray	Stainless steel * AISI 316	How to install
74392		74392CL090	74392CL129	74392CL144	74392CLSS	
74393		74393CL090	74393CL129	74393CL144	74393CLSS	
74394		74394CL090	74394CL129	74394CL144	74394CLSS	
74395		74395CL090	74395CL090	74395CL090	74395CLSS	


DIMENSIONS OF FIXATION SYSTEM & DECORATIVE RING




FOR NICHE: Fits in Mini niches.



FOR LARGE NOZZLE L: Fits into nozzles with a \varnothing 116 mm trim or less.



FOR SMALL NOZZLE S: Fits into nozzles with a \varnothing 90 mm trim or less.




FOR PIPE: Fits into \varnothing 63mm pipes or wall bushings in concrete pools.

INSTALLATION FITTINGS

SWIMMING POOL TYPE	DECORATIVE RING FOR NICHE 74392	DECORATIVE RING FOR NOZZLE L 74393	DECORATIVE RING FOR NOZZLE S 74394	DECORATIVE RING FOR PIPE 74395	
CONCRETE	06967	56498	35418	53956	15661
CONCRETE + LINER	00369	59983	00338	-	
PANELS	49828	00330	27084	-	
POLYESTER	00369	00330	74179	-	

PACKAGING AND PALLETIZATION

SINGLE BOX



FIXATION SYSTEM & DECORATIVE RING



STANDARD BOX



Code	76588M - 76589M	75690M
Single box size (mm)	130 x 160 x 130	242x 120 x 242
Volume / Single box (m ³)	0,0027	0,0076
Weight / Single box (Kg)	0,415	1,138
Units / Standard box	8	2
Volume / Standard box (m ³)	0,0241	0,0241
Peso / Standard box (Kg)	3,63	2,59
Units / Pallet	440	110
Volume / Pallet (m ³)	1,8	
Weight / Pallet (Kg)	219,8	162,4