

LAMINATED FILTER TC/NG RAL 7001



FEATURES

- ✓ Laminated filter manufactured with polyester resin and fiber glass.
- ✓ Excellent exterior finish in gelcoat.
- ✓ Filter color: RAL7001
- ✓ ¼" air and water drain
- ✓ Connections to six positions multiport valve with: filtration, backwash, rinse, recirculate, waste and closed operations.
- ✓ Black top lid with screws.
- ✓ Maximum temperature: 50°C
- ✓ Maximum pressure: 2.5 bar.

CARACTERÍSTICAS

- ✓ Filtros laminados con resina de polyester y fibra de vidrio.
- ✓ Excelente acabado exterior en gelcoat.
- ✓ Filtro color: RAL7001
- ✓ Purga de agua y aire ¼"
- ✓ Conexiones para válvula selectora de seis vías con operaciones de: filtración, lavado, enjuague, recirculación, vaciado y cerrado.
- ✓ Tapa superior con tornillos negra.
- ✓ Máxima temperatura: 50°C.
- ✓ Máxima presión: 2.5 bar.

FILTER DETAILS



- Cone diffuser
- Cono difusor




- Fitted with 1" laterals
- Equipado con brazos colectores de 1"



- Black top lid with screws
- Tapa superior negra con tornillos

TECHNICAL DATA														PACKAGING	
Code	Model (mm)	Connections (mm/inch)		Filtering velocity (m³/h/m²)	Filtration Area (m²)	Flow (m³/h)	Maximum pressure (bar)	Sand (0.4-0.8mm) (kg)	Net weight (kg)	D (mm)	H (mm)	M (mm)	N (mm)	Units per pallet	Box dimension (cm)
		Mm	inch												
20611FR99	500	50	1 ½"	50	0,19	10	2,5	95	15	525	725	419	294	8	56x56x85
20612FR99	600	50	1 ½"	50	0,28	14	2,5	125	21	620	790	455	330	8	65x65x86
21583FR99	650	50	1 ½"	50	0,33	16,5	2,5	200	22	680	825	495	370	8	70x70x89
20613FR99	750	63	2"	50	0,44	22	2,5	290	33	800	930	655	425	2	80x80x93
21584FR99	900	63	2"	50	0,64	32	2,5	500	50	960	1100	633	403	2	96x96x110
40963FR99-2	950	63	2"	50	0,70	35	2,5	545	55	970	1130	665	395	1	97x97x113
40963FR99	950	75	2 ½"	50	0,70	35	2,5	545	55	970	1130	665	395	1	97x97x113

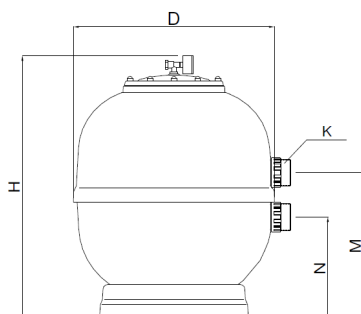

TESTED
ACCORDING TO
EN16713-1