

RELIANCE 2

LED ICAO Runway Threshold and Threshold/End

Uni and Bidirectional Inset, 12-inch



ADB SAFEGATE
RELIANCE2

Compliance with Standards

ICAO	Annex 14, Volume 1
IEC	61827
NATO	STANAG 3316
EASA	CS-ADR-DSN
STAC	SPE/STAC/SE/E/VIS/6008
Canada	TP 312
China	CAAC
CE	

Uses

ICAO

- Runway threshold
- Runway threshold/end

Features and Benefits

Efficiency

- Available in three versions:
 - RELIANCE IQ with integrated intelligence
 - RELIANCE with integrated fail - open (Mon) technology. Fuse resistors are part of the Mon - functionality and spares need to be ordered separately
 - RELIANCE Non-MON, non-monitored lights
- Precision aimed optics enhancing photometric performance and complementing extended LED life
- Reduced bottom pan profile allowing for very shallow base can installation
- LED pulse width modulated (PWM) at 400 Hz optimizing LED performance and eliminating perceptible flicker to a moving human observer throughout the range of brightness steps
- Operates at all steps of constant current regulator technologies designed in compliance with IEC or FAA requirements
- Fully dimmable lights, conforming to the dimming curve of traditional halogen lights
- Low protrusion, high-intensity, Style 3 (≤ 6.35 mm) inset light fixtures
- No negative slope in front of the prisms

Sustainability

- Fully encapsulated all-in-one universal power supplies for Runway, Taxiway, Approach and Omni inset families
- Latest generation LEDs providing a long-lasting light source with high efficiency and low power consumption
- Reinforced top cover substantially exceeding standards to improve durability and longevity (directional beams only)
- One single family of fixtures covering all runway, taxiway and approach applications
- IP68 rated enclosure designed for harsh environments; all fastenings are stainless steel
- Compatible with existing infrastructure allowing for direct replacement of existing LED inset fixtures

Safety

- Improved mechanical design to strengthen and consolidate components, improving the customer maintenance experience
- Failed LED detection as required by Engineering Brief 67D
- Robust lightning protection complying with ANSI/IEEE C62.41-1991; Location Category C2 as required by FAA Engineering Brief 67 Category C2 is defined as a 1.2/50 μ S – 8/20 μ S combination wave, with a peak voltage of 10,000 V and a peak current of 5,000 A

RELIANCE 2

Ordering Code

	Application	Standard(s)	Market Specific	Dimensions	Prism	Beam Orientation	Toe-in	Color - Side 1 (Left)	Color - Side 2 (Right)	Power and Monitoring	Connector and Cable	Options	Version
LS	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐

Application

RT = Runway threshold/end

Standard(s)

3 = ICAO¹

Market Specific

2 = Anodized Finish

Dimensions

2 = 12 inch (305 mm) diameter, 11.25 inch BC (285 mm)

Prism

S = Standard prism

R = Reinforced prism

Beam Orientation

1 = Unidirectional

2 = Bidirectional

Toe-in

L = Left Side Toe-in (Unidirectional)³

R = Right Side Toe-in (Unidirectional)

N = None²

Color - Side 1 (Left)

F = F-Green (ICAO, default green)

Color - Side 2 (Right)

R = Red

N = None

Power and Monitoring

S = 2.8 - 6.6 A, Non-Monitored — Power Only⁴

M = 2.8 - 6.6 A, Fail-Open Monitoring⁴

P = 2.8 - 6.6 A IQ0 Integrated (IQ disabled)

Q = 2.8 - 6.6 A IQ1 Integrated (IQ enabled)

Connector and Cable

1 = 1 x Style 6 2-Pole Plug, 2 Individual Wires

3 = 2 x Style 6 2-Pole Plug, 2 Individual Wires

5 = 1 x Flat 3-Pole Plug, 3 Individual Wires

6 = 2 x Flat 3-Pole Plug, 3 Individual Wires

Options

0 = None

Version

1 = Version 1


Ordering Code Notes

1. Includes standards NATO, EASA, STAC, TP 312 and MOS 139.
2. L and R designations are always in relationship to side 1 only.
3. RT green / red only - always toed.
4. 2-cordset option available.

Power Supply Options

- Non-monitored — power only
- Monitored — integrated fail-open technology
- IQ with integrated remote for RELIANCE IL

Toe-In

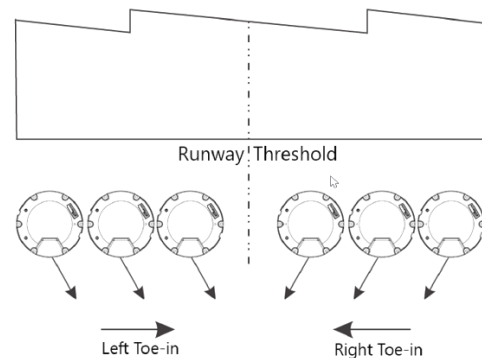

Installation and Maintenance

The light fixture can be installed in a 12-inch base. Gaskets are sold separately. Refer to the user manual INTEROPERABILITY appendix to identify the correct gasket and bolts for your specific base and ensure a reliable fit.

RELIANCE 2

Operating Conditions

Operating temperature	-55 °C to +55 °C / -67 °F to +131 °F
Storage temperature	-60 °C to +80 °C / -76 °F to +176 °F
Humidity	Up to 100%

Dimensions and Weight

Dimensions	305 mm (12 in)
Weight	6.8 kg / 15 lb (12 in)

ANNEX

Fixture type – 1 cord set ¹	Fixture load	Isolation transformer		CCR load
		Wattage	Load	
Threshold/end	43 VA	45 W	12 VA	55 VA
Threshold	32VA	45 W	9 VA	41 VA

¹Values provided are for the "S" option non-monitored power only.

Note:

- IQ fixtures:
 - The minimum rating (dimension) for the isolation transformer is 65 W
 - The isolation transformer must have an additional 12 VA available above the fixture load for communication bandwidth. Size transformer to next size up to assure additional 12 VA coverage
- Fail-open fixtures:
 - The maximum rating for the isolation transformer is 200 W (a correctly calibrated CCR is important to achieve an accurate fail open response)
- Additional voltage loss not included in the above table which must be factored into the circuit load calculation:
 - Primary cables will result in a higher CCR load
 - Longer secondary cables may result in a larger size isolation transformer requirement
- Efficiency of the isolation transformer depends on the manufacturer of the transformer
- See user manual for cable loss formula and other power supplies

For more information about the product, including manuals and certifications, please see our Product Center on the ADB SAFEGATE website: www.adbsafegate.com.