



Compliance with Standards

FAA	AC 150/5345-46 and FAA Engineering Brief No. 67
ICAO	Annex 14, Volume 1
IEC	61827
NATO	STANAG 3316
EASA	CS-ADR-DSN
STAC	SPE/STAC/SE/E/VIS/6008
UK	CAP 168
UFC	3-535-01
Canada	TP 312
Australia	MOS 139
CE	

Uses

ICAO

- Runway edge ≤ 45 m width runway

FAA

- L-862(L) runway edge

Features and Benefits

Efficiency

- Infrared for EFVS/NVG compatibility. Highly configurable to meet operational requirements
- The LED uses 400 Hz PWM modulation to optimize performance and prevent visible flicker at all brightness levels.
- The Lights are fully dimmable and conform to the FAA EB 67D and ICAO Annex 14 dimming curve
- A dedicated aiming device allows easy leveling and azimuth adjustment of the light
- Three screws allow up to 4° leveling adjustment of the fixture after installation

Sustainability

- Independent Product Carbon Footprint calculation available to support in product lifecycle analysis
- Modular housing maximizes parts commonality and enables midlife upgrades
- Available with either a glass or UV-resistant polycarbonate outer lens
- A single fixture family covers all elevated approach, runway, and stop bar applications
- The enclosure is IP68 and IP69K rated for harsh environments; All fastenings are stainless steel
- This product is a direct replacement for ADB SAFEGATE LED elevated fixtures due to its mechanical and photometric backwards compatibility
- Finish: Stainless steel hardware, aluminum body, phosphated aviation yellow electrostatic polyester powder coating
- Based on the LED manufacturer's ratings and calculations, LED life expectancy (L70) is guaranteed to exceed 50,000 operating hours
- Aerodynamic and lightweight design built to withstand the strongest jet blast

Safety

- Clear daytime recognition with large colored optical module surround
- Modular mechanical design consolidates and strengthens components for faster and easier maintenance and reconfiguration
- Failed-LED detection as required by FAA Engineering Brief 67D
- The product meets the lightning protection requirements of ANSI/IEEE C62.41-1991 and FAA Engineering Brief 67, Location Category C2. It is tested with a 1.2/50–8/20 μ s combination wave, up to 10,000 V and 5,000 A

Ordering Code

Application	Standards	Market Specific	Lens Type	Toe-in	Color - Side 1 (Left)	Color - Side 2 (Right)	Omnidirectional	Power Supply	Cable and Connector	Fixture Height	Coupling	Option 2	Advanced Connectivity	Refurbished	Version control
A															

Application

RE = Runway edge L-862(L)

Standards

1 = ICAO & FAA

Market Specific

0 = None

4 = German MIL 7-step¹

Lens Type

G = Glass

P = UV resistant polycarbonate

Toe-in

L = Side 1 – left toe-in

R = Side 2 – right toe-in

C = Both sides with toe-in

Color - Side 1 (Left)

W = White

Y = Yellow

R = Red

N = None (obscured)

Color - Side 2 (Right)

W = White

Y = Yellow

R = Red

F = Green

N = None (obscured)

Omnidirectional

0 = None

1 = Dimmable circling guidance

2 = Constant intensity circling guidance

Power Supply

S = No monitoring

M = With monitoring

Cable and Connector

1 = 1 x style 6 2-pole plug, 2 individual wires²

2 = 1 x style 1 2-pole plug, jacketed SO 2 core cable³

Fixture Height

B = <350mm¹

C = 14" OAH

D = 20" OAH

E = 24" OAH

F = 30" OAH

Coupling

B = 2" 11TPI (BSP) coupling no base plate¹

C = 2" 11.5TPI (NPS) coupling no base plate

E = 2" 11TPI (BSP) flush break coupling no base plate¹

F = 2" 11.5TPI (NPS) flush break coupling no base plate¹

Option 2

0 = None

1 = Smart arctic kit

3 = Near infra red

4 = Smart arctic kit & near infra red

Advanced Connectivity

0 = 0

Refurbished

0 = 0


Version control

1 = 1

Ordering Code Notes

1. Not ETL submitted or not applicable to FAA market.
2. With separate earth for internal routing
3. With separate earth for external routing

Toe-in Coding

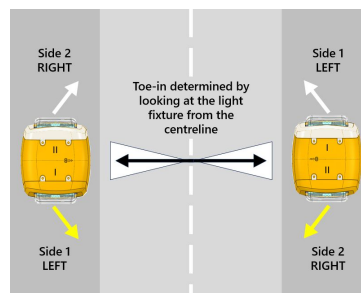

Power Supply

- Non-monitored power only
- Monitored — integrated fail-open technology

Maintenance and Installation

The fixture has an aluminum body. Install it on the ground with a frangible coupling or elevated on a mast with a mounting stem, as applicable.

Designed for backward compatibility with ADB SAFEGATE LEAP and EREL fixtures in existing installations.



Operating Conditions

Operating temperature	-55 °C to +55 °C / -67 °F to +131 °F
Storage temperature	-60 °C to +80 °C / -76 °F to +176 °F
Humidity	Up to 100%

Dimensions and Weight

Dimensions	TBC	TBC
Weight	Min 2.7 kg (6 lb)	TBC

ANNEX

Elevated light fixtures with arctic kit, circling guidance and infra red (all features enabled)¹.

Fixture type	Fixture load ¹	Isolation transformer		CCR load
		Wattage	Load	
Runway edge, L-862(L), bidirectional, white / white	49 VA	65 W	10 VA	59 VA
Runway edge, L-862(L), bidirectional, white / yellow	46 VA	65 W	9 VA	55 VA
Runway edge, L-862(L), bidirectional, white / red	44 VA	30 W / 45 W	9 VA	54 VA
Runway edge, L-862(L), bidirectional, yellow / red	42 VA	30 W / 45 W	8 VA	50 VA
Runway edge, L-862(L), unidirectional, white	28 VA	30 W / 45 W	6 VA	34 VA
Runway edge, L-862(L), unidirectional, yellow	26 VA	30 W / 45 W	5 VA	31 VA
Runway edge, L-862(L), bidirectional, red / red	41 VA	30 W / 45 W	9 VA	50 VA
Runway edge, L-862(L), bidirectional, white / green ²	43 VA	30 W / 45 W	9 VA	52 VA
Runway edge, L-862(L), bidirectional, green / yellow ²	40 VA	30 W / 45 W	8 VA	49 VA

Notes

1. The fixture load list shows the load with **all functions enabled**, as required by the FAA. This also applies to ICAO-specific datasheets. To calculate the fixture VA, use the table that follows and subtract the applicable values from the fixture load.
2. FAA displaced threshold

Overhead VA per function

Fixture type	Fixture VA
Arctic kit	5 VA / 10 VA
Circling guidance	5 VA / 9 VA
Infra red	3 VA / 6 VA

Note:

- Fail-open fixtures:
 - The maximum rating for the isolation transformer is 150 W
- Additional voltage loss not included in the above table which must be factored into the circuit load calculation:
 - Primary cables will result in a higher CCR load
 - Longer secondary cables may result in a larger size isolation transformer requirement
- Efficiency of the isolation transformer depends on the manufacturer of the transformer
- See user manual for a complete overview of all variant power consumption data and other power supplies

For more information about the product, including manuals and certifications, please see the Product Center on the ADB SAFEGATE website: www.adbsafegate.com.