
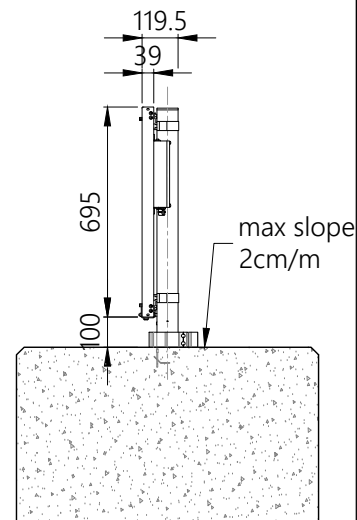


FRONT VIEW
SIGN 1150x700mm
Scale 1/25

FRONT VIEW
SIGN 1300x700mm
Scale 1/25

FRONT VIEW
SIGN 1600x700mm
Scale 1/25

FRONT VIEW
SIGN 1800x700mm
Scale 1/25


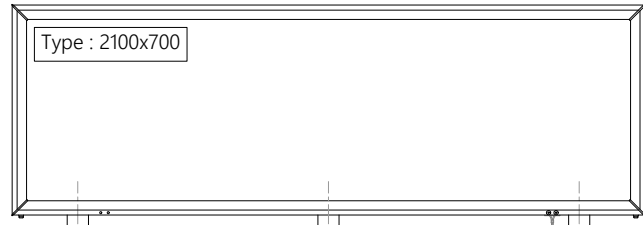


FRONT VIEW
SIGN 2100x700mm
Scale 1/25


FRONT VIEW
SIGN 2500x700mm
Scale 1/25

FRONT VIEW
SIGN 2650x700mm
Scale 1/25

SIDE VIEW
SIGN 700mm
Scale 1/25

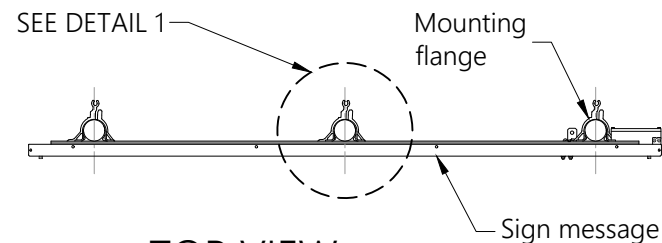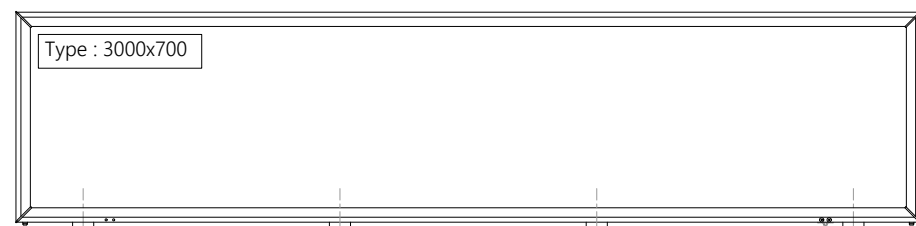

TOP VIEW
RELIANCE SIGN
Scale 1/25



DETAIL 1

FRONT VIEW
SIGN 3000x700mm
Scale 1/25

NOTES:



1. This drawing shows general installation details related to ADB Safegate products and is for information only, not for construction. The designer must verify compliance of design with local standards and varying characteristics for each unique airfield project.
2. Foundation sizes provided do not exceed 93% overturning capacity at point of post failure under jet blast loading (i.e. 322 km/hr).
3. Minimal reinforcement should be provided for foundation lengths of 2m or longer.
4. Design assumes good, well drained soil with a water table below the foundation base.
5. Ground conditions must be reviewed before selecting foundation sizes.
6. Contractor to ensure 98% maximum dry density (MDD) at base of foundation.
7. Type and quality of concrete to be as per civil specification for buried load bearing structures for the airport in question.
8. ADB Safegate waives its liability for wrongful use of the information.





TAXIWAY INFORMATION SIGNS
RELIANCE SIGNS - 700 mm
TYPICAL INSTALLATION DETAILS
MODE 3 ICAO Wind Load Requirement 480 km/h

SCALE: 1/25	UNIT: mm
DRAWN BY: EK	CHECKED BY: TH
DATE: 16/09/2022	SHEET: 1-2



ADBSG_A_SIGN_RELIANCE-Mode3_00

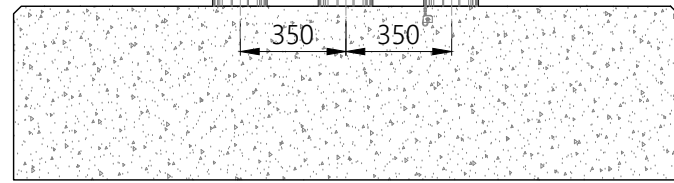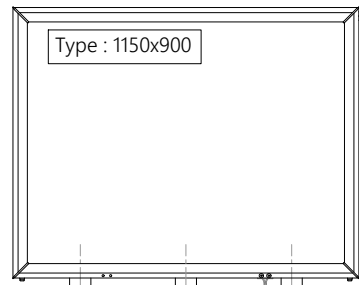



FRONT VIEW
SIGN 1150x900mm
Scale 1/25

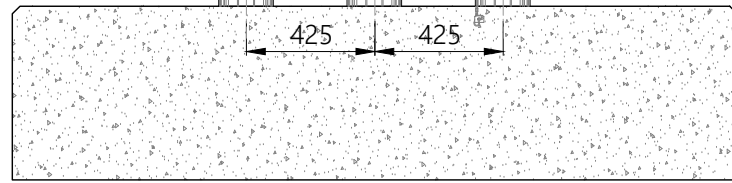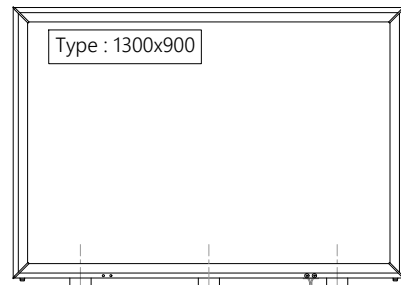



FRONT VIEW
SIGN 1300x900mm
Scale 1/25

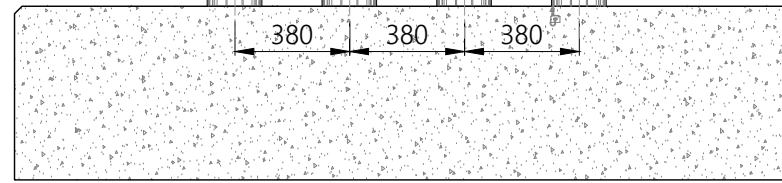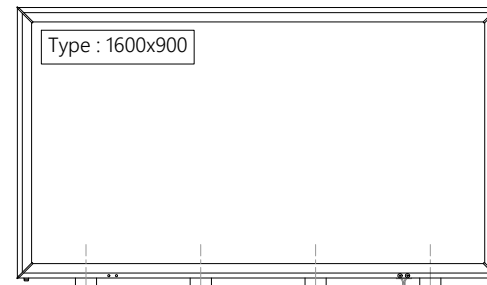


FRONT VIEW
SIGN 1600x900mm
Scale 1/25

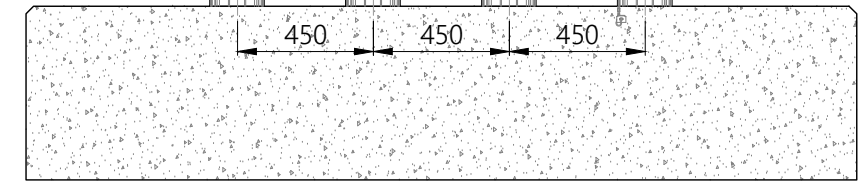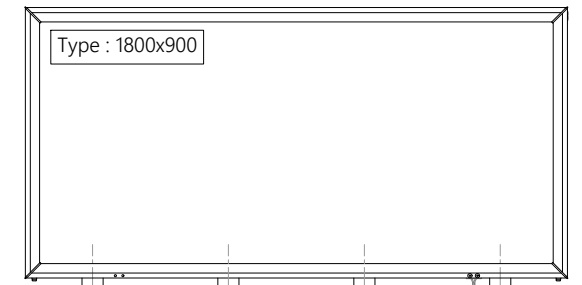



FRONT VIEW
SIGN 1800x900mm
Scale 1/25

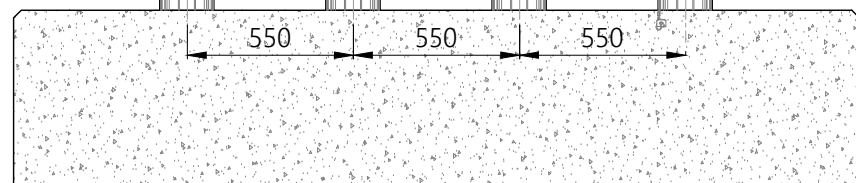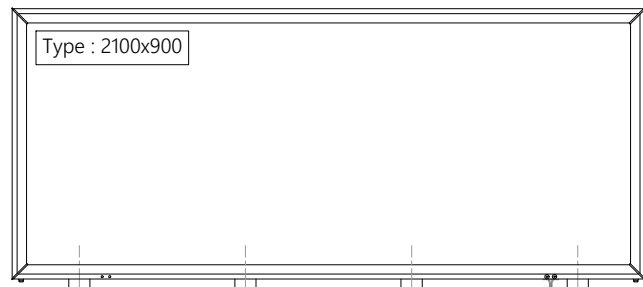


FRONT VIEW
SIGN 2100x900mm
Scale 1/25

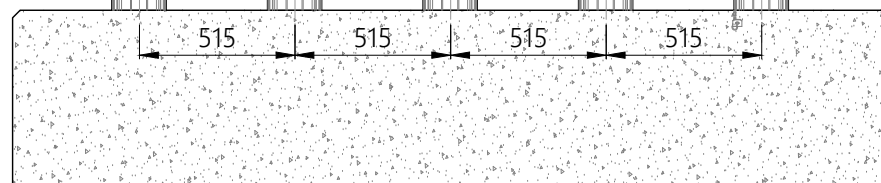



FRONT VIEW
SIGN 2500x900mm
Scale 1/25

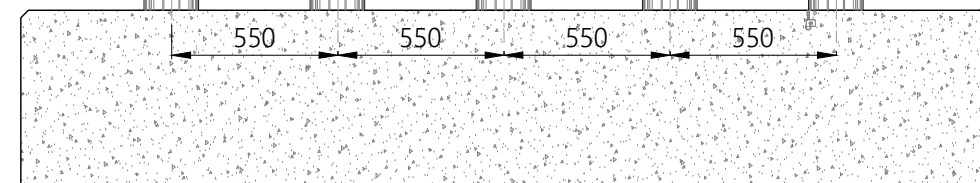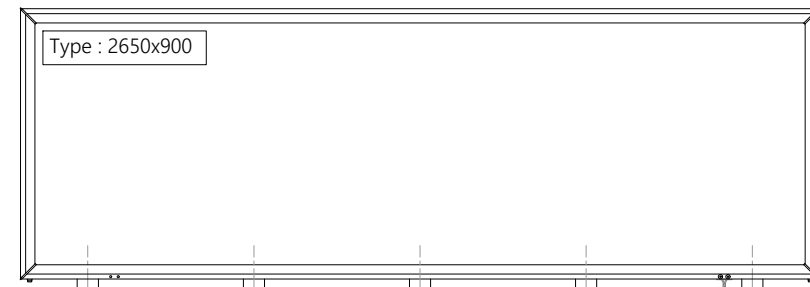


FRONT VIEW
SIGN 2650x900mm
Scale 1/25

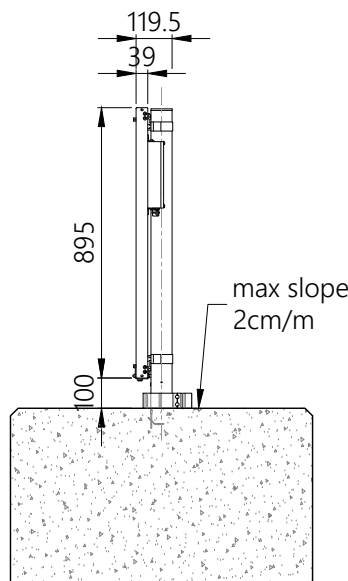


SIDE VIEW
SIGN 900mm
Scale 1/25

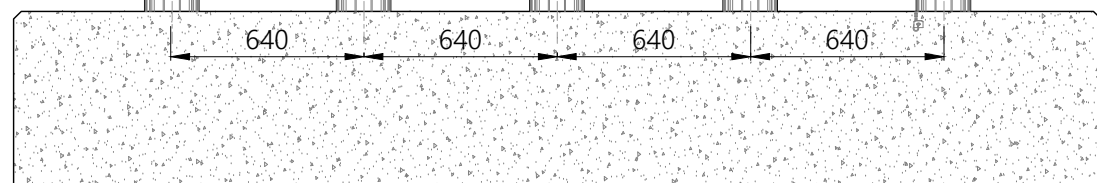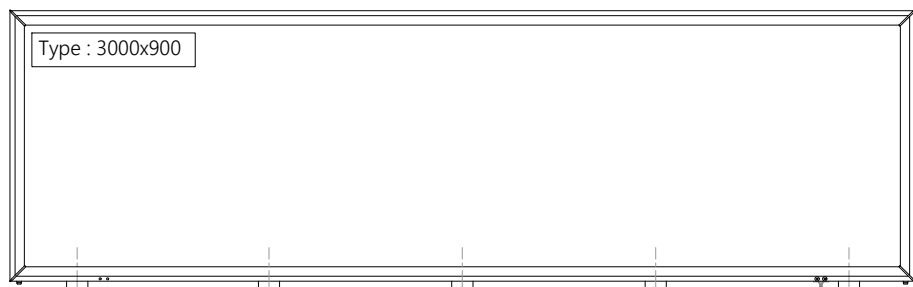

FRONT VIEW
SIGN 3000x900mm
Scale 1/25

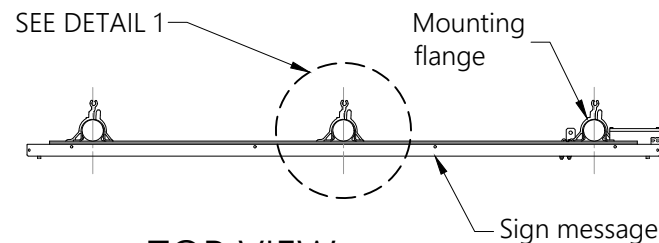

TOP VIEW
RELIANCE SIGN
Scale 1/25



DETAIL 1

NOTES:

1. This drawing shows general installation details related to ADB Safegate products and is for information only, not for construction. The designer must verify compliance of design with local standards and varying characteristics for each unique airfield project.
2. Foundation sizes provided do not exceed 93% overturning capacity at point of post failure under jet blast loading (i.e. 322 km/hr).
3. Minimal reinforcement should be provided for foundation lengths of 2m or longer.
4. Design assumes good, well drained soil with a water table below the foundation base.
5. Ground conditions must be reviewed before selecting foundation sizes.
6. Contractor to ensure 98% maximum dry density (MDD) at base of foundation.
7. Type and quality of concrete to be as per civil specification for buried load bearing structures for the airport in question.
8. ADB Safegate waives its liability for wrongful use of the information.



TAXIWAY INFORMATION SIGNS
RELIANCE SIGNS -900 mm
TYPICAL INSTALLATION DETAILS
MODE 3 ICAO Wind Load Requirement 480 km/h

SCALE: 1/25	UNIT: mm
DRAWN BY: EK	CHECKED BY: TH
DATE: 16/09/2022	SHEET: 2-2
ADBSG_A_SIGN_RELIANCE-Mode3_00	