

# CIRCULAR


## Standard matting



### MECHANICAL, PHYSICAL AND CHEMICAL PROPERTIES

Measured characteristics		Standard	Value	
MECHANICAL				
Rubber compound			synthetic	
Hardness		ASTM D2240	70 ±5	Shore A
Abrasion resistance (5N)		ISO 4649	≤250	mm³
CHEMICAL RESISTANCE				
Common cleaning products		EN 423	Good	

#### PROFILE

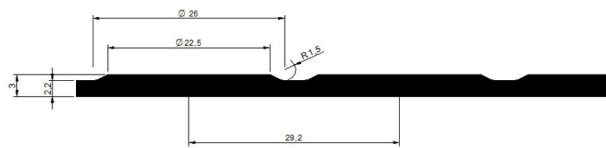

#### PATTERN



Circular studs (MC 2K1)

### FEATURES

- Non-slip surface
- Circular studs
- Backface: impression
- Thermal and acoustic insulation

### ADVANTAGES

- Prevents the risk of persons falling
- Visibility
- Easy to clean and low maintenance
- Noise, vibration, and cold propagation reduction

### APPLICATIONS

- Basic flooring for industrial use.
- WARNING: for public areas where more demanding safety is required, we advise the use of our fire resistant and low and non toxic smoke emission qualities.

### MAINTENANCE RECOMENDATION

Always follow manufacturer warnings and instructions when using any cleaning product.

## Standard matting

## CIRCULAR

## DIMENSIONS

Code	Stock sit.	Colour	Thickness (mm)		Width (mm)		Length (m)		Weight (kg/m²)	Pattern	Back face	Dielectric strenght	Marking band	Inner carboard tube Ø mm
MCD0020003001Y	stock	●	3	±0.3	1200	±2%	10	±2%	4.06	MC	impression	-	-	80
MCD0020003002Y	no stock	●	3	±0.3	1000	±2%	10	±2%	4.06	MC	impression	-	-	80

## PACKAGING

94/62/EC

Labelling	Self-adhesive label indicating product name, dimensions, area in m <sup>2</sup> , nominal weight, and product code to allow product traceability.	LDPE4
Wrapping	Black polyethylene film.	LDPE4

Other colours are available under request.

Depending on the manufacturing process there could be differences in some tonalities of the roll colours.

Colours of the sample kits and catalogues has to be considered as indicative.

Unless typographical error, information and figures of our technical datasheet are based on our experience and laboratory tests according to international standards. This data is intended to be used as a guideline only. Material performance depends on the conditions of use and the final application.