


# S E527

## TECHNICAL SHEETING

BLACK EPDM 70

FIRE RESISTANT EPDM SHEETING

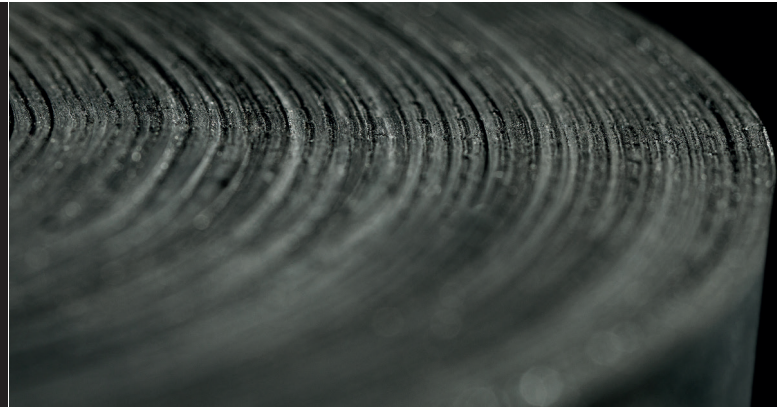

### MECHANICAL & PHYSICAL PROPERTIES

#### MECHANICAL

Rubber Compound	EPDM
Rubber Color	Black
Density	1.45 g/cm <sup>3</sup> ±0.05
Hardness (ISO 48-4)	70±5 Shore A
Tensile strength (ISO 37)	≥7 MPa
Elongation at break (ISO 37)	≥400 %
Tear resistance (ISO 34-1)	≥25 N/mm
Compression set (ISO 815-1)	22h @ 85 °C : 30%

#### TEMPERATURE

Working temperature	-30/+100 °C
---------------------	-------------

#### AGEING

Δ Hardness (ISO 188)	168h @ 85 °C : ≤ 10 Shore A
Δ Tensile strength (ISO 188)	168h @ 85 °C : ≤ -15%
Δ Elongation at break (ISO 188)	168h @ 85 °C : ≤ -30%
Ozone resistance (ASTM D1149 type A)	200pphm, 96h, 40 °C, 20%: No crack

### CHEMICAL RESISTANCE

Diluted acids and bases	Good
Concentrated acids and bases	Medium
Ozone	Very good
Oils and hydrocarbons	Medium

### FEATURES

- High performance EPDM sheeting. Fire resistant with low and not toxic smoke emission. Halogen-free.

### REGULATIONS

- Classified as HL3 R22, R23 & R24 according to European EN 45545-2 + A1:2016 regulation.

### ADVANTAGES

- Very good fire resistance
- Low smoke emission. Halogen-free
- Excellent ozone resistance
- Good ageing resistance
- Very good heat resistance
- Matte finish to guarantee a good surface finished quality and to secure an easy unrolling.

### APPLICATIONS

- Pieces, gaskets, covering and other industrial elements subject to risk of fire. Specially for railways vehicles material.

### MAINTENANCE RECOMMENDATION

- Always follow manufacturer warnings and instructions when using any cleaning product.

Asbestos  
FREE

Halogen  
FREE

RoHS  
compliant

REACH  
compliant

## DIMENSIONS

Article number	Stock Situation	Thickness (mm)	Width (mm)	Length (mm)	Weight	Side 1 finish	Side 2 finish	Type of insertion	Number Of Insertions	Inner cardboard tube Ø mm
SME52700001001	STD STOCK	1	1400 ±2%	20000 ±2%	1,45	Matt	Smooth	-	0	80 mm
SME52700002001	STD STOCK	2	1400 ±2%	15000 ±2%	2,9	Matt	Smooth	-	0	80 mm
SME52700003001	STD STOCK	3	1400 ±2%	10000 ±2%	4,35	Matt	Smooth	-	0	80 mm
SME52700004001	STD STOCK	4	1400 ±2%	10000 ±2%	5,8	Matt	Smooth	-	0	80 mm
SME52700005001	STD STOCK	5	1400 ±2%	10000 ±2%	7,25	Matt	Smooth	-	0	
SME52700006001	STD STOCK	6	1400 ±2%	10000 ±2%	8,7	Matt	Smooth	-	0	
SME52700008001	STD NOT STOCK	8	1400 ±2%	5000 ±2%	11,6	Matt	Smooth	-	0	
SME52700010001	STD NOT STOCK	10	1400 ±2%	5000 ±2%	14,5	Matt	Smooth	-	0	
SME52700012001	STD NOT STOCK	12	1400 ±2%	5000 ±2%	17,4	Matt	Smooth	-	0	

## IDENTIFICATION

## Labelling

Self-adhesive label indicating product name, dimensions, area in m<sup>2</sup>, nominal weight, and product code to allow product traceability. (94/62/EC - LDPE4)

## Wrapping

Black polyethylene film.(94/62/EC - LDPE4)

## Packaging

Thickness ≤6mm rolled on cardboard tube Ø 80mm. Thickness >6mm in roll.

Unless typographical error, information and figures of our technical datasheet are based on our experience and laboratory tests according to international standards. This data is intended to be used as a guideline only. Material performance depends on the conditions of use and the final application.