


OILMAT

Technical matting


OIL RESISTANT

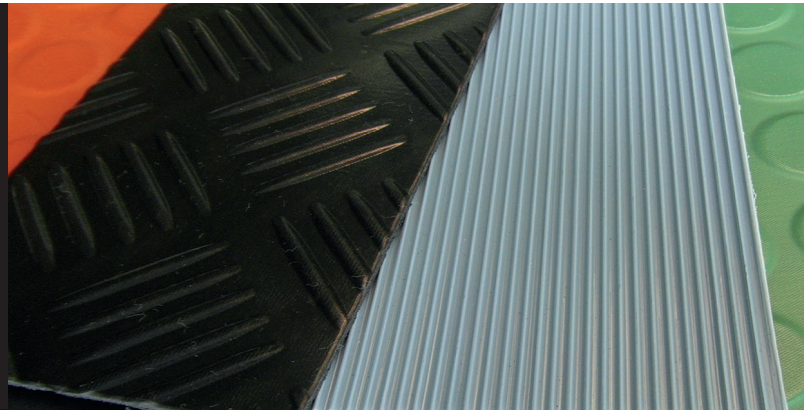

MECHANICAL, PHYSICAL AND CHEMICAL PROPERTIES

	Measured characteristics	Standard	Value	
MECHANICAL				
	Rubber compound		synthetic	
	Hardness	ASTM D2240	70 ±5	Shore A
	Abrasion resistance (5N)	ISO 4649	≤200	mm ³
	Residual indentation	EN ISO 24343	≤0.15	mm
	Dimensional stability	EN ISO 23999	±0.3	%
	Sound insulation	ISO 10140-3	12	dB
CHEMICAL RESISTANCE				
	Common cleaning products	EN 423	Good	

PROFILE

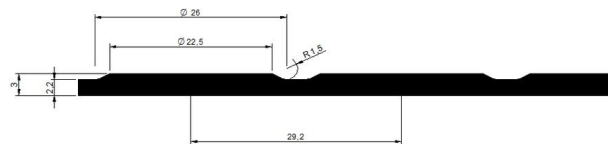

PATTERN



Circular studs (MC 2K1)



Checker (MK)

FEATURES

- Non-slip surface.
- Circular studs or checkered pattern.
- Backface: impression

ADVANTAGES

- Good resistance to animal or vegetable oils and fats (maximum +50°C) and non-aromatic hydrocarbons
- Conductor of electricity
- Thermal and acoustic insulation
- Excellent walking and standing comfort
- Non-slippery
- Easy to clean and low maintenance
- Noise, vibration, and cold propagation reduction

APPLICATIONS

- Suitable for industrial site.
- Indoor installations.
- Warehouses, aisles, locker rooms, machine or heavy equipment fronts, with fatty products projection.

MAINTENANCE RECOMENDATION

Always follow manufacturer warnings and instructions when using any cleaning product.

DIMENSIONS

Code	Stock sit.	Colour	Thickness (mm)		Width (mm)		Length (m)		Weight (kg/m²)	Pattern	Back face	Dielectric strenght	Marking band	Inner carboard tube Ø mm
5602425	stock	●	3	±0.3	1000	±2%	10	±2%	4.05	MC	impression	-	-	80
5029244	no stock	●	3	±0.3	1200	±2%	10	±2%	4.05	MC	impression	-	-	80
S1774070	stock	●	3	±0.3	1400	±2%	10	±2%	3.75	MK	impression	-	-	80

PACKAGING

94/62/EC

Labelling	Self-adhesive label indicating product name, dimensions, area in m ² , nominal weight, and product code to allow product traceability.	LDPE4
Wrapping	Black polyethylene film.	LDPE4

Other colours are available under request.

Depending on the manufacturing process there could be differences in some tonalities of the roll colours.

Colours of the sample kits and catalogues has to be considered as indicative.

Unless typographical error, information and figures of our technical datasheet are based on our experience and laboratory tests according to international standards. This data is intended to be used as a guideline only. Material performance depends on the conditions of use and the final application.