

MINIMUM DISTANCES

Installation with an un-insulated elbow pipe

-  Flammable material
-  Fire wall, e.g. 50 mm Jøtul Firewall, 110 mm brick or other material with corresponding fireproof and insulating abilities
-  Chimney

All distances are in mm.



All distances are minimum distances

* Applies for all installations

These cover plates must be removed when installing into flammable material protected by insulation

Floor plate



Flammable materials

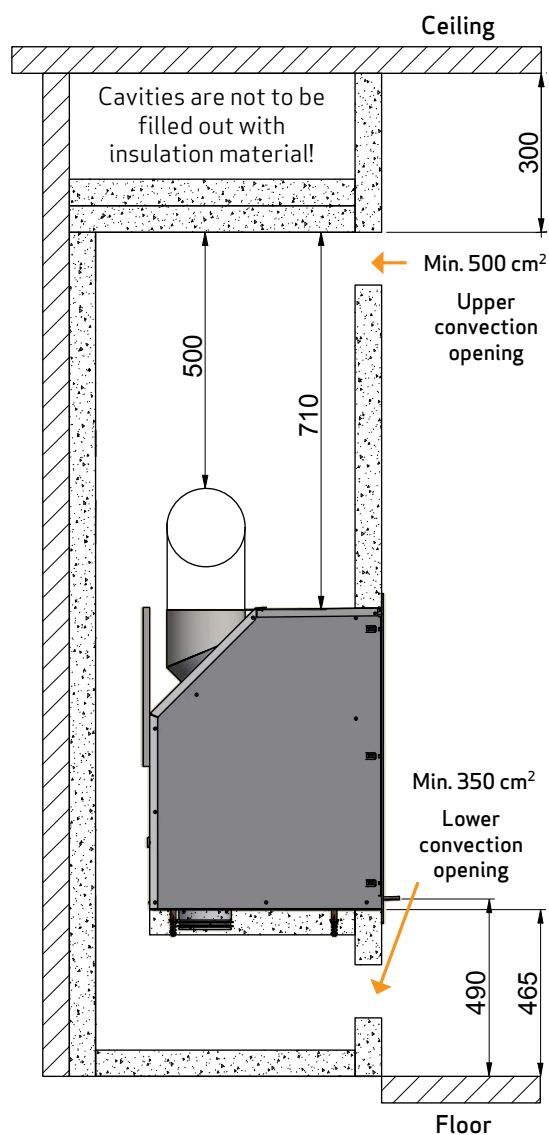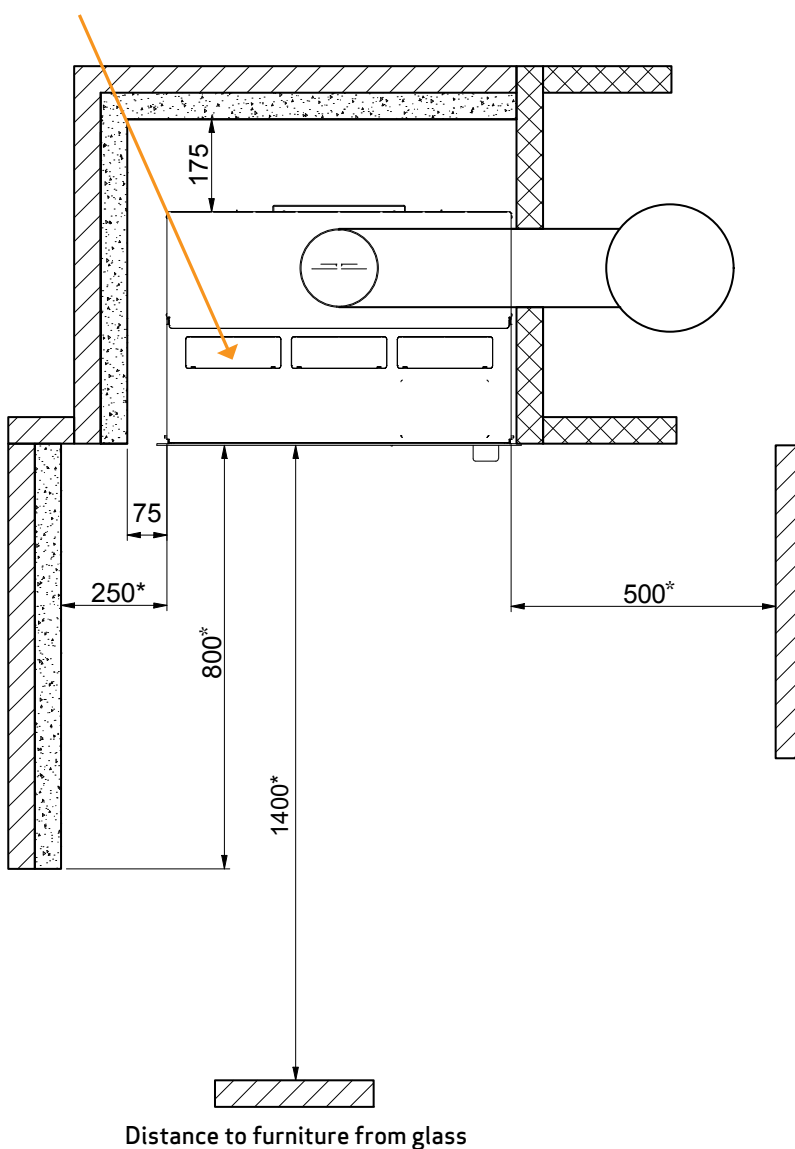

MINIMUM DISTANCES

Installation with an insulated, vertical flue pipe

- structure/surround to ceiling

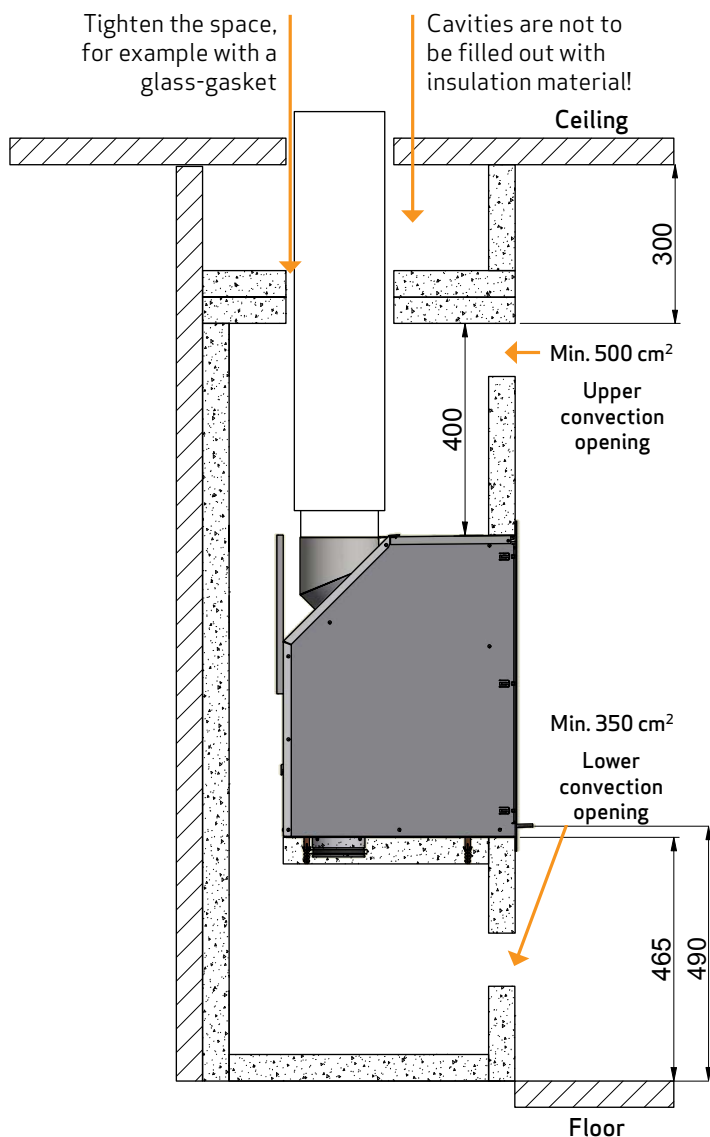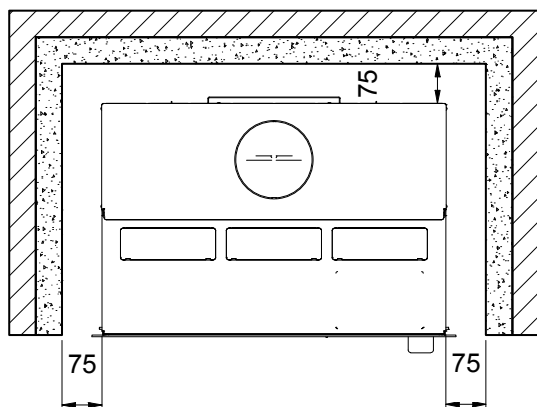

The distance to fire wall (brick) depends on the use of an insulated flue pipe all the way down to the insert



Flammable material



Fire wall, e.g. 50 mm Jøtul Firewall, 110 mm brick or other material with corresponding fireproof and insulating abilities


All distances are in mm

All distances are minimum distances


MINIMUM DISTANCES

Installation with an insulated, vertical flue pipe


- open structure/surround

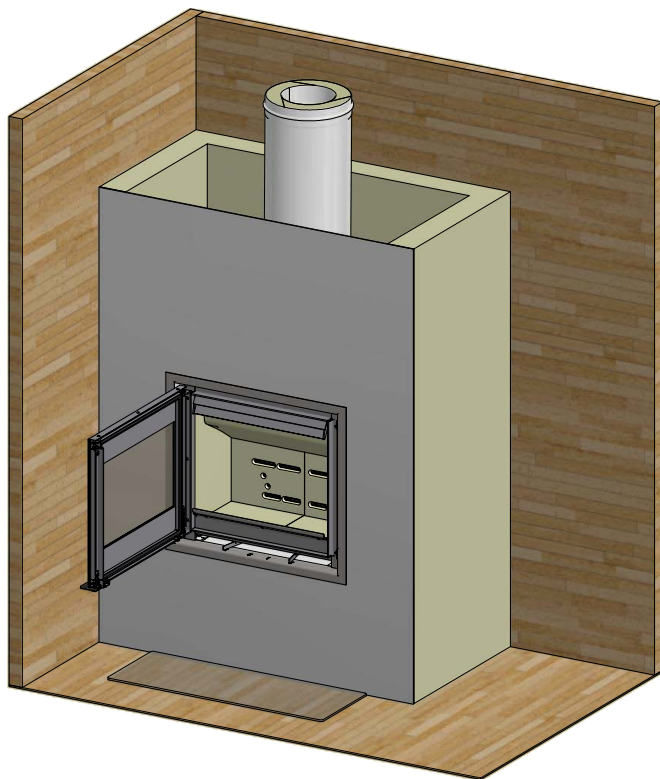

When building or fitting into a structure/surround that is open at the top, the convection holes can be omitted. However, you should note that no top plate must be placed on the structure

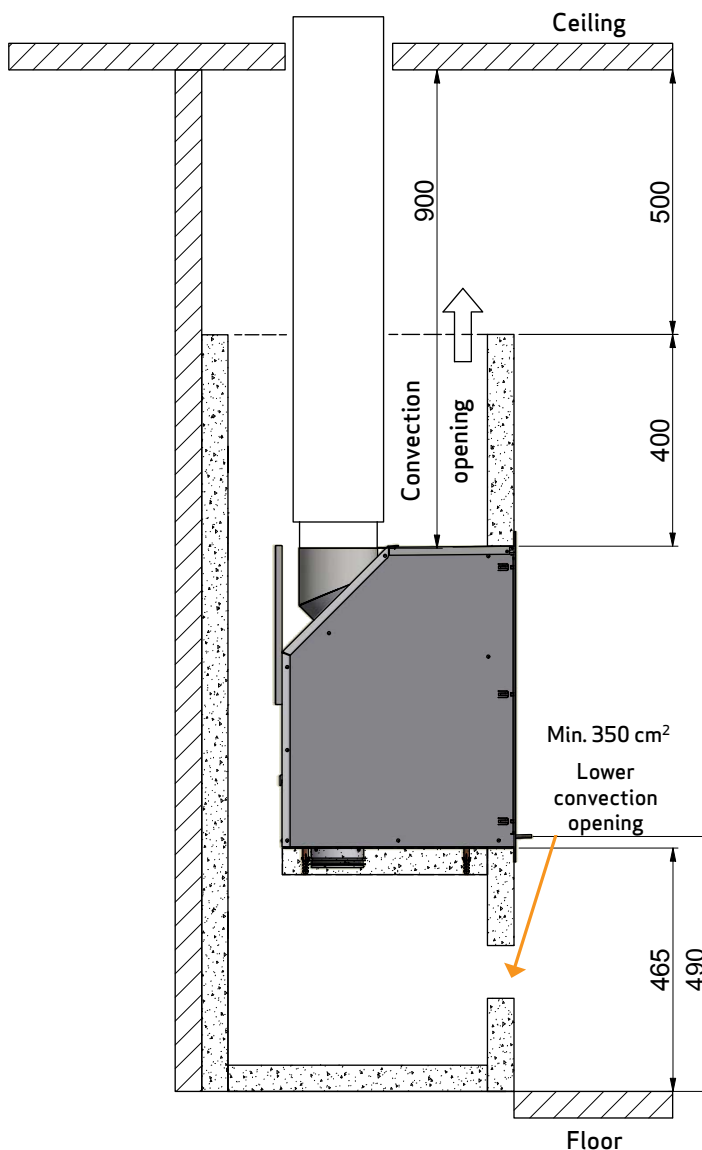

-  Flammable material
-  Fire wall, e.g. 50 mm Jøtul Firewall, 110 mm brick or other material with corresponding fireproof and insulating abilities

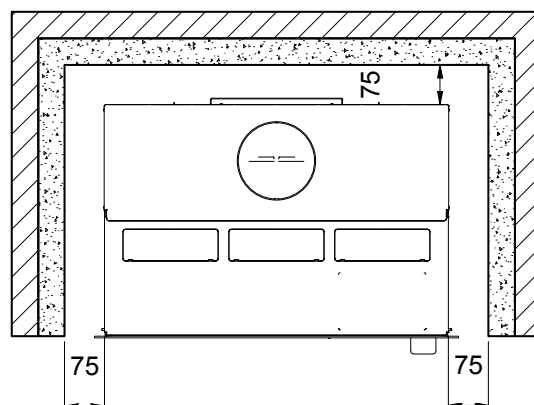

All distances are in mm

All distances are minimum distances