



EJ04300

Experience unparalleled ergonomic excellence with our Smart BoardMaster SCN65XP coilnailer! The adjustable long arm and fixed length short arm are designed to minimize worker fatigue and boost productivity. Our BoardMaster absorbs tool recoil, enabling longer, more comfortable work sessions. Benefit from PLC-driven shooting control with precise 10mm distance adjustments and seamless manual mode switching. Toggle between two pre-set firing distances and achieve perfect fastener depth with stepless depth of drive. Ensure perfect alignment with track and laser guides, and maintain correct spacing with adjustable side guides. Enjoy extended battery life with SENCO's 18V battery platform.

APPLICATIONS

Decking, decking soft wood, hardwood flooring, insulation boards, paneling, sheathing, siding, wood-to-wood applications, baseboard, insulation sheathing, boards, wood construction, particle boards

FEATURES

- Telescopic arm
- Programmable PLC
- Adjustable edge guide
- Laser line
- Retractable handle
- Selectable Trigger


TECHNICAL SPECIFICATIONS

Pitch	8 - 8 mm
Wounding type	Flat
Operating temperature	-18 - 49 °C
Oil free	No
Collation type	Wire collated
Type of nail	Coilnails
Dimensions	1283 x 314 x 1173 mm
Firing mode	Automatic
Magazine capacity	275 pieces
Shots / second	5
Air inlet size	3/8" female
Air consumption at 60 shots/minute	270 l/m
Operating pressure	5 - 8.3 bar

IDENTIFICATION

Article number	EJ04300
GTIN	8715274245256

FASTENER SPECIFICATIONS

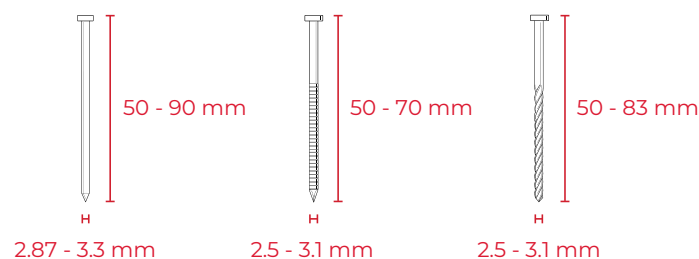

MANUAL RELATED FASTENERS

NAME	FINISH	CODE
Senco cn flat bb. dp. ring 2,5x60mm	Bright basic standard tensile	BLxxAPBF-CN
Senco cn flat hdg dp ring senc. 2,5x60mm	Hot-Dipped galvanised 3	BLxxASBFR-CN
Senco cn flat bb dp sm. senc. 2,87x65mm	Bright basic standard tensile	GDxxAPBF-CN
Senco cn flat bb dp. ring senc. 3,1x60mm	Bright basic standard tensile	HLxxAPBF-CN
Senco cn flat galv dp smooth Se 2.8x70mm	Regular galvanised	GDxxAABF-CN

ACCESSORIES



NAME	CODE
Battery 18V Li-ion 1,5 Ah, blister	VB0160EU



NAME	CODE
Air plug 320 compatible 3/8"NPT, male	4000110