



MAKE IT LAST.

COILPRO50, COILNAILER, DUAL



4U2001N

The pneumatic CoilPro50 coilnailer is one of the lightest on the market (2kg) and drives coilnails ranging in length from 32 to 50mm. This Pro Serie coilnailer drives a broader range of nail lengths due to the adjustable height tray which allows quick change of nail lengths. The high nail capacity of the CoilPro50 minimizes production interruption. The magazine canister turns way up for easy reload in seconds. Available with or without blow model case.

APPLICATIONS

Sheathing, siding, packaging, fencing, subfloor, boards

FEATURES

- Aluminium housing
- Comfort grip
- Selectable Trigger
- 360° Adjustable Exhaust
- Tool-free depth-of-drive


TECHNICAL SPECIFICATIONS

Pitch	7 - 7 mm
Wounding type	Conical
Alternative wounding type	Flat
Oil free	No
Collation type	Wire collated
Alternative collation type	Plastic collated 16mm
Type of nail	Coilnails
Includes case	No
Net weight	2 kg
Firing mode	Selectable
Magazine capacity	375 pieces
Shots / second	3
Air inlet size	3/8" female
Air consumption at 60 shots/minute	83.2 l/m
Operating pressure	5 - 8 bar

IDENTIFICATION

FASTENER SPECIFICATIONS

Article number	4U2001N
GTIN	8718035007032

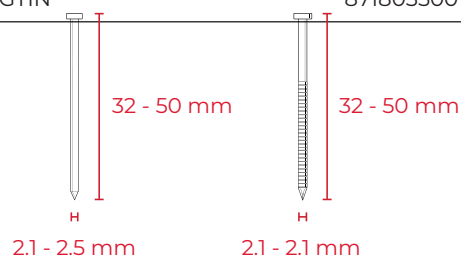

FASTENERS

NAME	FINISH	CODE
Senco cn con bb dp sm senc. 2,1x45mm	Bright basic standard tensile	SCxxAPBV-CN
Senco cn con. galv. dp sm senc. 2,1x38mm	Regular galvanised	SCxxAABV-CN
Senco cn con. bb dp. sm. Senc. 2,1x38mm	Bright basic standard tensile	SCxxAPBV-CN
Senco cn con. bb dp. sm. Senc. 2,1x32mm	Bright basic standard tensile	SCxxAPBV-CN
Senco cn con. bb dp. sm. Senc. 2,1x50mm	Bright basic standard tensile	SCxxAPBV-CN

ACCESSORIES



NAME	CODE
Lubrication oil for pneumatic tools 946 ml PC0102	



NAME	CODE
Lubrication oil for pneumatic tools with moisture guard PC1295	

MATCHING PRODUCTS



NAME	CODE
AC24016, low noise compressor	AFN0022



NAME	CODE
AC33024UK2, Oil-less 230V UK compressor	AFN0004UK2



NAME	CODE
AC33024EU, Oil-less 230V EU compressor	AFN0004EU



NAME	CODE
AC20250BL-UK2, air compressor 230V	AFN0039UK2