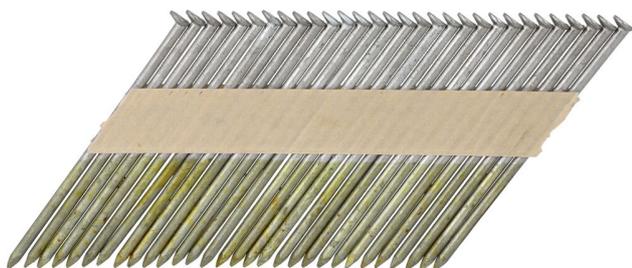


SPL-H559ASBXR**APPLICATIONS**

Framing, pallets and crates, subfloor,
wood-to-wood applications

TECHNICAL SPECIFICATIONS

Collation angle	34 °
Collation type	Paper collated
Wire material	Carbon steel standard tensile
Finish	Hot-Dipped galvanised 3
Coating	Sencoted
Head diameter	7 mm
Nail shank type	Smooth shank
Point type	Diamond
Pointangle	40 °
Nail length	90 mm
Nail diameter	3.1 mm

LOGISTICAL SPECIFICATIONS

GTIN	8715274140070
Package quantity	600 pieces

CE SPECIFICATIONS

CE fastener type	Round cross-section plain shank nail
Protection level in micron	55
Service class	3
Coating type	Coating type 3
Characteristic yield moment	4557 Nmm
Characteristic head pull through parameter	19.26 N/mm ²
Characteristic tensile capacity	5.75 N