


GB BARBED STRIPNAIL 2,87X75MM CARBON STEEL STANDARD TENSILE

GB57ASBSR

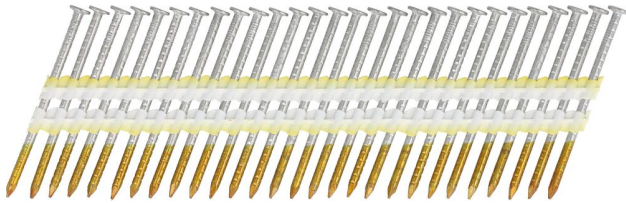

APPLICATIONS

Framing, sheathing, subfloor, decking, trusses, pallets and crates


TECHNICAL SPECIFICATIONS

Collation angle	21 °
Collation type	Plastic collated
Wire material	Carbon steel standard tensile
Finish	Hot-Dipped galvanised 3
Coating	Sencoted
Nail head type	Full round head
Nail shank type	Barbed shank
Point type	Diamond
Pointangle	40 °
Nail length	75 mm
Nail diameter	2.87 mm

LOGISTICAL SPECIFICATIONS

GTIN	8715274037233
Package quantity	2000 pieces
Net weight	8.44 kg

FASTENER SPECIFICATIONS



2.87 mm

CE SPECIFICATIONS

CE fastener type	Round cross-section ring shank nail
Protection level in micron	55
Service class	3
Coating type	Coating type 3
Coating length	55.5 mm
Head cross sectional area	36 mm
Threaded/profiled length	55 mm
Characteristic yield moment	3192 Nmm
Characteristic head pull through parameter	20.3 N/mm ²
Characteristic tensile strength	695 N/mm ²