




MAKE IT LAST.

# SENCOPLUS G6 OFFSET RING STRIPNAIL 2,8X70MM CARBON STEEL STANDARD TENSILE

## SPL-G656ASBXR

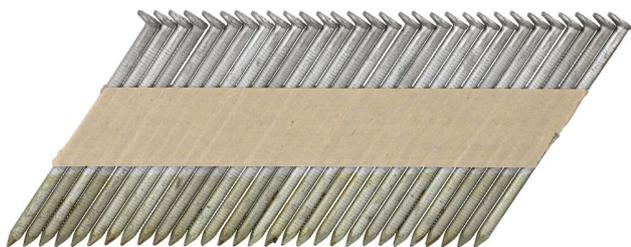

### APPLICATIONS

Framing, pallets and crates, subfloor, wood-to-wood applications

### TECHNICAL SPECIFICATIONS

Collation angle	34 °
Collation type	Paper collated
Wire material	Carbon steel standard tensile
Finish	Hot-Dipped galvanised 3
Coating	Sencoted
Head diameter	6.5 mm
Nail shank type	Ring shank
Point type	Diamond
Pointangle	40 °
Nail length	70 mm
Nail diameter	2.8 mm

### LOGISTICAL SPECIFICATIONS

GTIN	8715274139623
Package quantity	600 pieces

### CE SPECIFICATIONS

CE fastener type	Round cross-section ring shank nail
Protection level in micron	55
Service class	3
Coating type	Coating type 3
Head cross sectional area	30 mm
Characteristic yield moment	3695 Nmm
Characteristic head pull through parameter	25.63 N/mm <sup>2</sup>
Characteristic tensile capacity	3.08 N
Characteristic tensile strength	695 N/mm <sup>2</sup>