



# SCN75

The pneumatic SCN75 coilnailer runs both wire and plastic collated nials ranging from 2,5 to 3,3mm in diameter and 45 to 75mm in length. Being part of the Pro Serie, this coilnailer can span a wide range of applications from framing and siding to sub-flooring and decks.

### **APPLICATIONS**

Framing, sheathing, siding, decking, subfloor, pallets and crates

#### **FEATURES**

- Selectable actuation switch
- Plastic or wire feed system
- Tool-free depth-of-drive


#### **TECHNICAL SPECIFICATIONS**

8 - 8 mm
Flat
No
Wire collated
Plastic collated 16mm
Coilnails
No
2.82 kg
Selectable
300 pieces
3
3/8" female
168 l/m
4.8 - 8.3 bar

## **IDENTIFICATON**

Article number SCN75

FASTENER SPECIFICATION 8715274015064

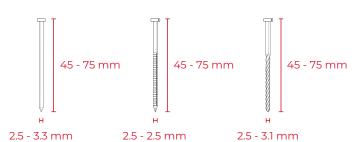









## **MANUAL RELATED FASTENERS**

NAME	FINISH	CODE
Senco cn flat galv dp ring senc. 2,87x65	Regular galvanised	GLxxAABF-CN
Senco cn flat hdg dp ring senc 2,87x75mm	Hot-Dipped galvanised 3	GLxxASBF-CN
Senco cn flat hdg dp ring senc. 2,5x60mm	Hot-Dipped galvanised 3	BLxxASBF-CN
Senco cn flat bb. dp. sm. 2,5x55mm	Bright basic standard tensile	BJxxAPBF-CN
Senco cn flat galv. dp. sm flat 2,5x50mm	Regular galvanised	BJxxAABF-CN

## **ACCESSORIES**



NAME CODE

Lubrication oil for pneumatic tools with moisture guardpc1295



NAME CODE
Trio lube 12, 4oz YB0123

# **MATCHING PRODUCTS**



AC24016, low noise compressor AFN0022



AC33024UK2, Oil-less 230V UK compressor AFN0004UK2

CODE



AC32024. low noise compressor AFN0031



AC33024EU, Oil-less 230V EU compressor AFN0004EU

NAME