

LEVER BLOCK 手扳葫芦


HSH-616

- FEATURES and ADVANTAGES
- Automatic Double Pawl Braking System
 - Asbestos Free Friction Disc
 - Industrial Powder Coating meet RoHS requirement
 - One Step Operation for free wheel
 - 1500 Cycles lift test, Meet JBT7334, EN13157, ANSI B30.16, AS1418 Standards


OPTIONAL FEATURES WITH EXTRA COST 选配



Built-in Overload Protection System
is available with Extra Cost
嵌入式的限载结构，可根据客户需求加配




Trust Bearing in bottom hook assembly
下钩架可装钢球，吊钩能360度旋转



Large Throat Opening Hook
大开口吊钩



Casting End Stop
铸造尾环




Zinc Plated Load Chain
镀锌起重链条



Shipyards hook
船用钩

- 特点
- 双棘爪制动
 - 摩擦片不含石棉
 - 表面工业级喷塑处理，达到欧盟RoHS要求
 - 链条高度可自由调节
 - 通过1500次寿命测试，同时满足国标，欧标，美标及澳标的标准要求

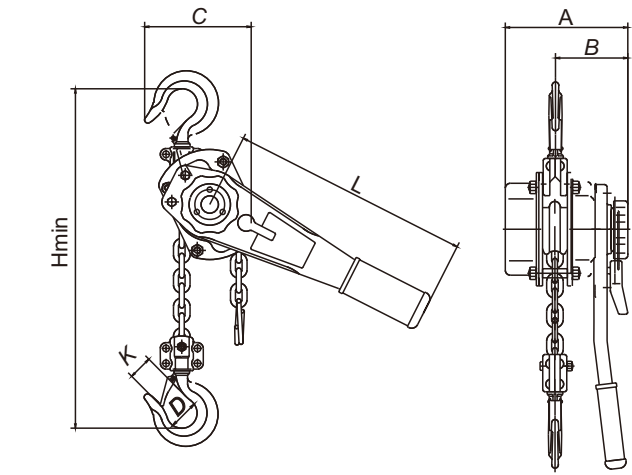

Model 型号		HSH616-0.75	HSH616-1.5	HSH616-3	HSH616-6	HSH616-9
Capacity 额定起重量	tons	0.75	1.5	3.0	6.0	9.0
Standard lift 标准起重高度	m	1.5	1.5	1.5	1.5	1.5
Running test load 试验载荷	KN	11.2	22.5	45	75	112.5
Effort required to lift rated load 最大手扳力	N	140	220	320	340	360
Strands of load chain 起重链行数		1	1	1	2	3
Diameter of load chain 起重链直径	mm	6	8	10	10	10
Dimensions 主要尺寸 (mm)	A	145	175	195	195	195
	B	86	100	115	115	115
	C	134	150	190	242	307
	D	38	48	50	65	81
	H	340	380	490	620	700
	L	285	410	410	410	410
	K	27	36	38	48	54
Net weight 净重	kg	9.5	11.5	18.5	27.5	46
Packing measurement 包装尺寸	cm	37.5X16X18	52X17X22	55X18.5X22.5	57X21X23	60X42X28
Extra weight per metre of Extra lift 增加1米起重高度增加的重量	kg	0.8	1.4	2.2	4.4	6.6