Datasheet

Suction cup B10XP Polyurethane 30/60, M5 male

Article number: 0204977



- Suitable for limited level adjustment with good stability.
- Excellent gripping performance on corrugated and porous or surface leaking objects such as cardboard, textured plastic parts and composite material (raw surface)
- In the two-coloured suction cup the bellows and the sealing lip are of different hardnesses, which makes the suction cup strong and stable for accelerations and speed, at the same time, soft and flexible.
- DURAFLEX® suction cups manufactured in a specially developed material that features the elasticity of rubber and wear resistance of polyurethane.
- The material DURAFLEX® is mark free.

Technical data

Description	Unit	Value	
Suction cup shape	-	Bellows	
Application	-	Corrugated / cardboard, Plastic injection molded parts	
Suction cup design	-	Round	
Characteristics	-	Corrugated / cardboard, Plastic injection molded parts	
Material	-	Polyurethane (PU)	
Weight, min.	g	0.6	
Suction cup model	-	B-XP	
Volume	cm³	0.19	
Height	mm	22.4	
Outer diameter, min.	mm	11	
Fitting size	-	M5	
Fitting option	-	None	
Fitting style	-	Male	
Fitting type	-	M-thread	
Suction cup model	-	B10XP PU30 PU60	
Movement, vertical max.	mm	3	
Curve radius, min.	mm	4	


Performance - Lifting forces

B10XP PU30 PU60	Vertical (N)	Parallel (N)
20 -kPa	2.6	1
60 -kPa	3.8	2
90 -kPa	4.5	2.5

Material Polyurethane (PU30) Polyurethane (PU60) Name Colour Yellow Green transparent Temperature, min. | °C 10 10 50 50 Temperature max. | °C Hardness | °Shore A 30 60

Hardriess Shore A	30	100
Material resistance		
Alcohol	n/a	n/a
Concentrated acids	Fair	Fair
Ethanol	Fair	Fair
Hydrolysis	Fair	Fair
Methanol	Poor	Poor
Oil	Excellent	Excellent
Oxidation	Poor	Poor
Petrol	Fair	Fair
Wear resistance	Excellent	Excellent
Weather and ozone	Excellent	Excellent

Dimensional drawings

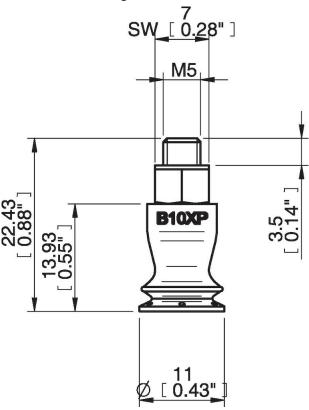

Values specified in this data sheet are tested at (unless otherwise stated):

- •Room temperature (20°C [68°F] \pm 3°C [5.5°F]).
- •Standard atmosphere (101.3 [29.9 inHg] \pm 1.0 kPa [0.3 inHg]).
- •Relative humidity 20-70%.
- •Compressed air quality, DIN ISO 8573-1 class 4.

Accessories

0205169 | Suction cup B10XP Polyurethane 60

Spare parts

3107030 | Fitting M5 male, 10–15 0204978 | Suction cup B10XP Polyurethane 30/60