

# Suction cup U4 Silicone

Article number: 3150114S

- Suitable for objects with flat or slightly curved surfaces.
- Also used for concave objects.



## Technical data

Description	Unit	Value
Suction cup shape	-	Universal
Application	-	Plastic injection molded parts
Suction cup design	-	Round
Characteristics	-	Plastic injection molded parts
Material	-	Silicone (SIL)
Weight, min.	g	0.08
Suction cup model	-	U
Volume	cm <sup>3</sup>	0.03
Height	mm	6.1
Outer diameter, min.	mm	5
Fitting size	-	None
Fitting option	-	None
Fitting style	-	None
Fitting type	-	None
Suction cup model	-	U4
Movement, vertical max.	mm	0.2
Curve radius, min.	mm	3

## Performance - Lifting forces

U4	Vertical (N)	Parallel (N)
20 -kPa	0.2	0.2
60 -kPa	0.9	0.8
90 -kPa	1.3	1

## Material

Name	Silicone, SIL 50° Shore A
Colour	Red
Temperature, min.   °C	-40
Temperature max.   °C	200
Hardness   °Shore A	50

## Material resistance

Alcohol	Good
Concentrated acids	Poor
Ethanol	n/a
Hydrolysis	Fair
Methanol	n/a
Oil	Poor
Oxidation	Excellent
Petrol	Poor
Wear resistance	Good

Weather and ozone


Excellent

Name

Silicone, SIL 50° Shore A

Dimensional drawings

Red

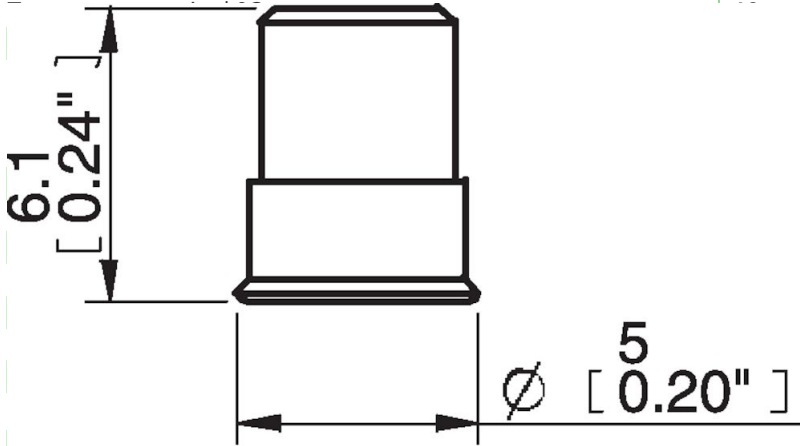

Weather and ozone

Excellent

Values specified in this data sheet are tested at (unless otherwise stated):

- Room temperature (20°C [68°F] ± 3°C [5.5°F]).
- Standard atmosphere (101.3 [29.9 inHg] ± 1.0 kPa [0.3 inHg]).
- Relative humidity 20-70%.
- Compressed air quality, DIN ISO 8573-1 class 4.

**Accessories**

3107031 | Fitting M5 male, 5-8