Datasheet

Suction cup BX75P Polyurethane 30/60 with filter, for thread insert

Article number: 0107145



- Suitable for level adjustment and for uneven and porous surfaces such as cardboard, etc.
- In the two-coloured suction cup the bellows and the sealing lip are of different hardnesses, which makes the suction cup strong and stable and, at the same time, soft and flexible.
- DURAFLEX® suction cups manufactured in a specially developed material that features the elasticity of rubber and wear resistance of polyurethane.
- The material DURAFLEX® is mark free.

Technical data

Description	Unit	Value
Suction cup shape	-	Multibellows
Application	_	Dry sheet metal, Corrugated / cardboard, Plastic injection molded parts, Mark Free
Suction cup design	-	Round
Characteristics	_	Dry sheet metal, Corrugated / cardboard, Plastic injection molded parts, Mark free
Material	-	Polyurethane (PU)
Weight, min.	g	71
Suction cup model	-	BX-P
Volume	cm³	80
Height	mm	51.7
Outer diameter, min.	mm	77.5
Fitting size	_	None
Fitting option	_	None
Fitting style	_	None
Fitting type	-	None
Suction cup model	-	BX75P PU30 PU60
Movement, vertical max.	mm	26
Curve radius, min.	mm	23

Performance - Lifting forces

BX75P PU30 PU60	Vertical (N)	Parallel (N)
20 -kPa	62	39
60 -kPa	110	83
90 -kPa	141	116

Material


Name	Polyurethane (PU30)	Polyurethane (PU60)			
Colour	Yellow	Green transparent			
Temperature, min. °C	10	10			
Temperature max. °C	50	50			
Hardness °Shore A	30	60			
Material resistance					
Alcohol	n/a	n/a			
Concentrated acids	Fair	Fair			
Ethanol	Fair	Fair			
Hydrolysis	Fair	Fair			
Methanol	Poor	Poor			
Oil	Excellent	Excellent			
Oxidation	Poor	Poor			
Petrol	Fair	Fair			
Wear resistance	Excellent	Excellent			

Excellent

Excellent

Dimensional drawings

Weather and ozone

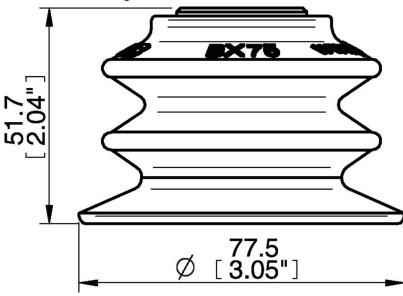

Values specified in this data sheet are tested at (unless otherwise stated):

- •Room temperature (20°C [68°F] ± 3°C [5.5°F]).
- •Standard atmosphere (101.3 [29.9 inHg] ± 1.0 kPa [0.3 inHg]).
- •Relative humidity 20-70%.
- •Compressed air quality, DIN ISO 8573-1 class 4.

Accessories

0106797 | Thread insert G3/8" male, with O-ring 0200716 | Thread insert G1/8" male, with O-ring and mesh filter 0201077 | Thread insert G1/4" male, with O-ring and mesh filter

Spare parts

0201003 | Suction cup filter BX75P, 10 pcs