


# Suction cup U20-2P Polyurethane 50

Article number: 0119995

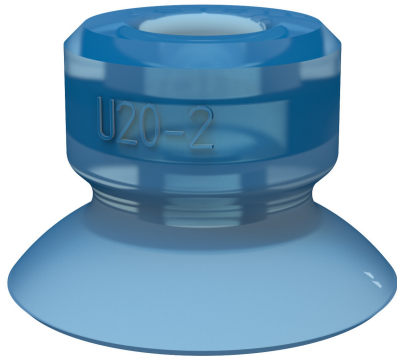

- Long life time suction cup
- Suitable for several book binding applications
- Easy to handle different paper qualities due to the possibilities to order the U20-2P in three different shore
- DURAFLEX® are suction cups manufactured in a specially developed material that features the elasticity of rubber and wear resistance of polyurethane.

## Technical data

Description	Unit	Value
Suction cup shape	-	Universal
Application	-	Bag opening/thin paper - slip sheets/film
Suction cup design	-	Round
Characteristics	-	Bag opening/thin paper - slip sheets/film
Material	-	Polyurethane (PU)
Weight, min.	g	1.7
Suction cup model	-	U-P
Volume	cm <sup>3</sup>	0.7
Height	mm	14
Outer diameter, min.	mm	20.5
Fitting size	-	None
Fitting option	-	None
Fitting style	-	None
Fitting type	-	None
Suction cup model	-	U20-2P PU50
Movement, vertical max.	mm	5
Curve radius, min.	mm	9

## Performance - Lifting forces

U20-2P PU50	Vertical (N)	Parallel (N)
20 -kPa	3	1.5
60 -kPa	11.5	3
90 -kPa	15	6

## Material

Name	Polyurethane (PU50)
Colour	Blue transparent
Temperature, min.   °C	10
Temperature max.   °C	50
Hardness   °Shore A	50

## Material resistance

Alcohol	n/a
Concentrated acids	Fair
Ethanol	Fair
Hydrolysis	Fair
Methanol	Poor
Oil	Excellent
Oxidation	Poor
Petrol	Fair
Wear resistance	Excellent

Material and ozone

Excellent

Name Polyurethane (PU50)

Dimensional drawings Blue transparent

$\varnothing 6$ [ 0.236" ]	10
	50
	50
	n/a
	Fair
	Fair
	Fair
	Poor
	Excellent
	Poor
	Fair
	Excellent
	Excellent

Values specified in this data sheet are tested at (unless otherwise stated):

- Room temperature (20°C [68°F] ± 3°C [5.5°F]).
- Standard atmosphere (101.3 [29.9 inHg] ± 1.0 kPa [0.3 inHg]).
- Relative humidity 20-70%.
- Compressed air quality, DIN ISO 8573-1 class 4.

Accessories

0205296 | Fitting U20-2P 1/8" male