# Datasheet

# Suction cup B40MF Thermoelastic polyurethane, G3/8" male, with mesh filter

Article number: 0101485



- Suction cup of TPU, a mark free material that leaves no trace on the object being handled.
- Suitable for level adjustment.
- Lifting movement to separate small and thin objects.
- Only lightweight objects should be handled when the lifting force is parallel to the surface.

#### **Technical data**

Description	Unit	Value
Suction cup shape	-	Bellows
Application	-	Mark Free
Suction cup design	-	Round
Characteristics	-	Mark free
Material	-	TPE
Weight, min.	g	10
Suction cup model	-	B-MF
Volume	cm³	15
Height	mm	44
Outer diameter, min.	mm	43.7
Outer diameter, actuated	mm	47.5
Fitting size	-	3/8"
Fitting option	-	Filter mesh
Fitting style	-	Male
Fitting type	-	G-thread
Suction cup model	-	B40MF
Movement, vertical max.	mm	12.5
Curve radius, min.	mm	22

### **Performance - Lifting forces**

B40MF	Vertical (N)	Parallel (N)
20 -kPa	18	13.6
60 -kPa	57	40
90 -kPa	72	47

#### Material

Oil

Oxidation

Wear resistance
Weather and ozone

Petrol

Name	Thermoplastic Polyurethane (TPE-U)			
Colour	White transparent			
Temperature, min.   °C	-20			
Temperature max.   °C	80			
Hardness   °Shore A	81			
Material resistance				
Alcohol	Good			
Concentrated acids	Poor			
Ethanol	n/a			
Hydrolysis	Poor			
Methanol	n/a			


Excellent

Excellent

Excellent

Good Poor

#### **Dimensional drawings**

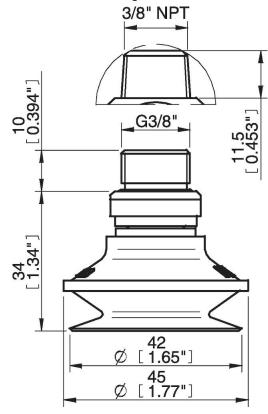

# Values specified in this data sheet are tested at (unless otherwise stated):

- •Room temperature (20°C [68°F]  $\pm$  3°C [5.5°F]).
- •Standard atmosphere (101.3 [29.9 inHg]  $\pm$  1.0 kPa [0.3 inHg]).
- •Relative humidity 20-70%.
- •Compressed air quality, DIN ISO 8573-1 class 4.

#### **Accessories**

0100261 | Fitting 5x1/8" NPSF female, 30-40

0101153 | Fitting 1/8" NPSF female, 30-40, with mesh filter

3250005 | Fitting 1/8" NPSF female, 30-40

3250089 | Fitting 3/8" NPT male, with mesh filter

3250091 | Fitting G1/4" male, 30-40, with mesh filter

3250093 | Fitting 1/4" NPT male, with mesh filter

3251006 | Fitting 1/8" NPSF female, 30-40, with dual flow control valve

3251007 | Fitting G1/4" male, 30-40, with mesh filter and dual flow control valve

3251008 | Fitting 1/4" NPT male, with dual flow control valve

3251009 | Fitting G3/8" male, 30-40, with mesh and dual flow control valve

 $3251010\ |\ Fitting\ 3/8"$  NPT male, with dual flow control valve

3251011 | Fitting 5x1/8" NPSF female, 30-40, with dual flow control valve



## **Spare parts**

0101113 | Suction cup B40MF Thermoelastic polyurethane 3250086 | Fitting G3/8" male, 30–40, with mesh filter

