

piINLINE® vacuum generator MIDI Si, 8-12 mm

Article number: 0122032



- Patented COAX® cartridge technology.
- High vacuum flow capacity in relation to energy consumption.
- Low weight inline design with push-in fittings for vacuum and compressed air.
- Quick and easy installation directly on the hose.
- Si cartridge for extra vacuum flow.
- Pi cartridge for high performance at low feed pressures.
- Xi cartridge when high flow and deep vacuum is needed.

Technical data


Description	Unit	Value
Material	-	CuZn, Nitrile (NBR), PA, SS
Temperature, max.	°C	80
Temperature, min.	°C	-10
Weight, min.	g	87
Feed pressure, max.	MPa	0.7
Noise level, max.	dBA	98
Noise level, min.	dBA	90
Air consumption	NI/s	106 l/m (3.7 scfm)
Diameter	mm	26
Diameter	mm	8
Diameter	mm	12
Length	mm	155

Performance

Feed pressure MPa	Air consumption NI/s	Vacuum flow (NI/s) at different vacuum levels (-kPa)													Max vacuum kPa
		0	10	20	30	40	50	60	70	75	80	90	95	99	
0.6	1.75	3.1	2.5	1.9	1.2	0.7	0.6	0.5	0.35	0	0	0	0	0	≥75

Feed pressure MPa	Air consumption NI/s	Evacuation time (s/l) to reach different vacuum levels (-kPa)													Max vacuum kPa
		10	20	30	40	50	60	70	80	90	95	99	99.5	100.3	
0.6	1.75	0.04	0.08	0.14	0.25	0.4	0.59	0.82	0	0	0	0	0	0	≥75

Dimensional drawings

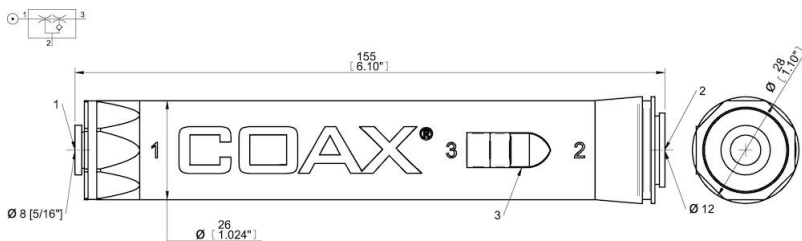

Values specified in this data sheet are tested at (unless otherwise stated):

- Room temperature (20°C [68°F] ± 3°C [5.5°F]).
- Standard atmosphere (101.3 [29.9 inHg] ± 1.0 kPa [0.3 inHg]).
- Compressed air quality, DIN ISO 8573-1 class 4.

Accessories

- 0123031 | Silencer piINLINE® MIDI
- 0123095 | Snap-in piINLINE® 1x MIDI mounting bracket
- 0123096 | Snap-in piINLINE® 1x MIDI mounting bracket for silencer