

# Suction cup U3 Conductive silicone, M2.5 male

Article number: 3250081SC



- Suitable for objects with flat or slightly curved surfaces.
- Also used for concave objects.
- Suction cups of conductive silicone are suitable for objects with sensitivity to static electricity.

## Technical data

Description	Unit	Value
Suction cup shape	-	Universal
Application	-	Electronic / semiconductor
Suction cup design	-	Round
Characteristics	-	ESD/Conductive/Antistatic
Material	-	Silicone (SIL)
Weight, min.	g	0.03
Suction cup model	-	U
Volume	cm <sup>3</sup>	0.005
Height	mm	10
Outer diameter, min.	mm	3.8
Fitting size	-	M2.5
Fitting option	-	None
Fitting style	-	Male
Fitting type	-	M-thread
Suction cup model	-	U3
Movement, vertical max.	mm	0.15
Curve radius, min.	mm	5

## Performance - Lifting forces

U3	Vertical (N)	Parallel (N)
20 -kPa	0.09	
60 -kPa	0.42	
90 -kPa	0.65	

## Material

Name	Conductive Silicone (CSIL)
Colour	Black
Temperature, min.   °C	-55
Temperature max.   °C	230
Hardness   °Shore A	50

## Material resistance

Alcohol	Good
Concentrated acids	Poor
Ethanol	n/a
Hydrolysis	Fair
Methanol	n/a
Oil	Poor
Oxidation	Excellent
Petrol	Poor
Wear resistance	Good

Material and ozone


Excellent

Name

Conductive Silicone (CSIL)

Dimensional drawings

Black

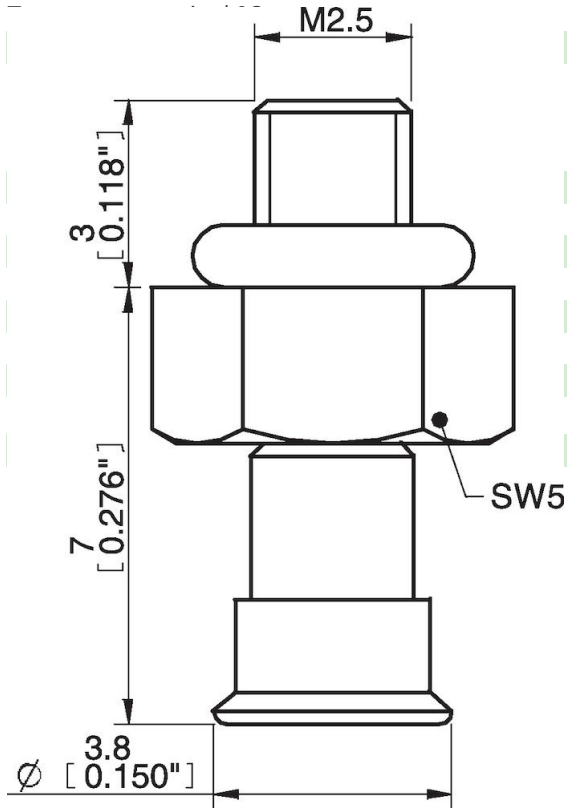

-55

230

50

Good

Poor

n/a

Fair

n/a

Poor

Excellent

Poor

Good

Excellent

Values specified in this data sheet are tested at (unless otherwise stated):

- Room temperature (20°C [68°F] ± 3°C [5.5°F]).
- Standard atmosphere (101.3 [29.9 inHg] ± 1.0 kPa [0.3 inHg]).
- Relative humidity 20-70%.
- Compressed air quality, DIN ISO 8573-1 class 4.

Spare parts

3150285SC | Suction cup U3 Conductive silicone