Datasheet

Suction cup F-OB 20x40 Silicone, G1/8" male SS, detectable, FCM

Article number: 0205918



- The silicone material complies with FDA 21 CFR 177.2600 and EU 1935/2004.
- Long lasting high-end silicone material
- A low percentage metal additive (Fe) is mixed with the rubber material to make it detectable.
- Suitable for frozen and raw food.
- Excellent grip on oblong parts with irregular surfaces and different heights, even at fast speeds and accelerations
- Available with male threaded and integrated Acid proof Stainless steel fittings.
- Easy to clean with hygienic design. No dust/dirt pockets.
- Low vacuum level needed to collapse bellows.
 Reduces risk for damaging the handled food product

Technical data

Description	Unit	Value	
Suction cup shape	-	Bellows	
Application	-	Food contact materials (FDA & EU), detectable	
Suction cup design	-	Oval	
Characteristics	-	Food contact materials (FDA & EU), detectable	
Material	-	Silicone (SIL)	
Load, torque, max.	Nm	13	
Weight, min.	g	26.4	
Suction cup model	-	F-OB	
Volume	cm³	5	
Height	mm	36	
Length	mm	40.8	
Fitting size	-	1/8"	
Fitting option	-	None	
Fitting style	-	Male	
Fitting type	-	G-thread	
Width	mm	20.8	
Material	-	ASTM 316L, SS	
Suction cup model	-	F-OB 20x40	
Movement, vertical max.	mm	7.6	
Curve radius, min.	mm	9	

Performance - Lifting forces

F-OB 20x40	Vertical (N)	Parallel (N)
10 -kPa	3.3	2.9
20 -kPa	6.9	6
40 -kPa	12	12.6


Material

Name

Colour	Blue			
Temperature, min. °C	-40			
Temperature max. °C	200			
Hardness °Shore A	40			
Material resistance				
Alcohol	Good			
Concentrated acids	Poor			
Ethanol	n/a			
Hydrolysis	Fair			
Methanol	n/a			
Oil	Poor			
Oxidation	Excellent			
Petrol	Poor			
Wear resistance	Good			
Weather and ozone	Excellent			

Silicone (SIL detectable FCM)

Dimensional drawings

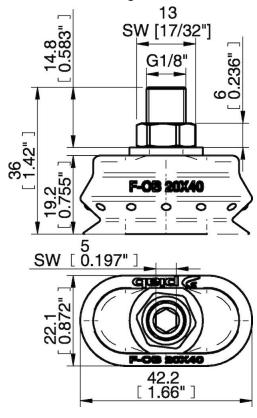

Values specified in this data sheet are tested at (unless otherwise stated):

- •Room temperature (20°C [68°F] \pm 3°C [5.5°F]).
- •Standard atmosphere (101.3 [29.9 inHg] \pm 1.0 kPa [0.3 inHg]).
- •Relative humidity 20-70%.
- •Compressed air quality, DIN ISO 8573-1 class 4.